



**WOLFLUBE<sup>®</sup>**

A COMPANY OF LUPUS GROUP SINCE 1963



**PROFESSIONAL LUBRICATION AND FUELING EQUIPMENT**

GREASE **GR**

OIL **O**

DIESEL **DI**

GASOLINE **G**

KEROSENE **K**

DEF **D**

WATER **W**

ANTIFREEZE **AN**


AIR **A**

CHEMICAL **C**



## ABOUT US

Wolflube; headquartered in Miami, Florida, was born in 2013. Moreover, Wolflube is part of Lupus Group which was founded 56 years ago with presence in Europe, South America, and North America. We specialize in developing and producing solutions for lubrication, fueling, and DEF. Located in South Miami, with a factory in Italy, Wolflube has a large inventory to offer our customers a complete line of solutions in fluid handling technology. With very qualified personnel, Wolflube has many years of experience in developing and training customers and partners around the world.

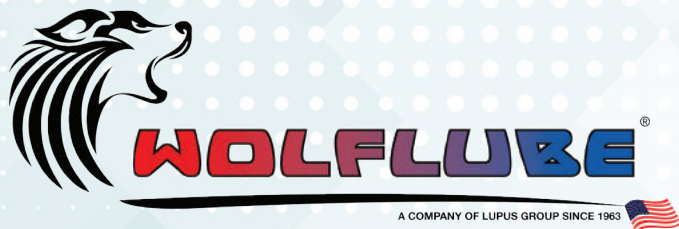

In 1963 Mr. Lupo Panelli founded *Lupus Lubrificação e Abastecimento LTDA*, which years later would become a group composed of 3 lubrication companies. Mr. Panelli, first name “Lupo”, comes from a Latin term meaning Wolf. Lupus is the plural of “Lupo”, and it means Wolves, that’s how and why he started his legacy in the lubrication equipment industry. Mr. Panelli’s idea when he named his first company was, just like the Wolves, together we are stronger if we respect and follow principals such as team player concepts, respect, and loyalty.



### OUR VISION

#### Vision

To be the leader in generating business value to our customers.

### OUR MISSION

#### ... for our Customer.

Striving to build long lasting relationships based on the values that we believe and equip our customers to tackle tough challenges.

#### ... for our Employees.

Helping our employees to build a long lasting successful career based on values such as, respect to our Customers, integrity and professionalism.

01

#### WOLFLUBE HEADQUARTER

Wolflube headquarter located in the south of Miami.

02

#### LUPUS GROUP HEADQUARTER

Headquarter of Lupus Group located in São Paulo state.


03

#### FACTORY

Factory in Italy, where our products are manufactured.



*The new patented air-operated pumps, high quality, and heavy-duty reels fully designed and manufactured by WOLFLUBE, which shows remarkable operating features. It is fully assembled with electronic machine tools and parts are carefully tested to assure reliability and long life of the products. The choice of materials and manufacturing quality make our products suitable to work in the worst environmental conditions. High operating pressure products, low air consumption, reduced number of moving parts, electrolytic treatment to elevate to high corrosion strength and other features make our product line even more reliable and cost effective.*

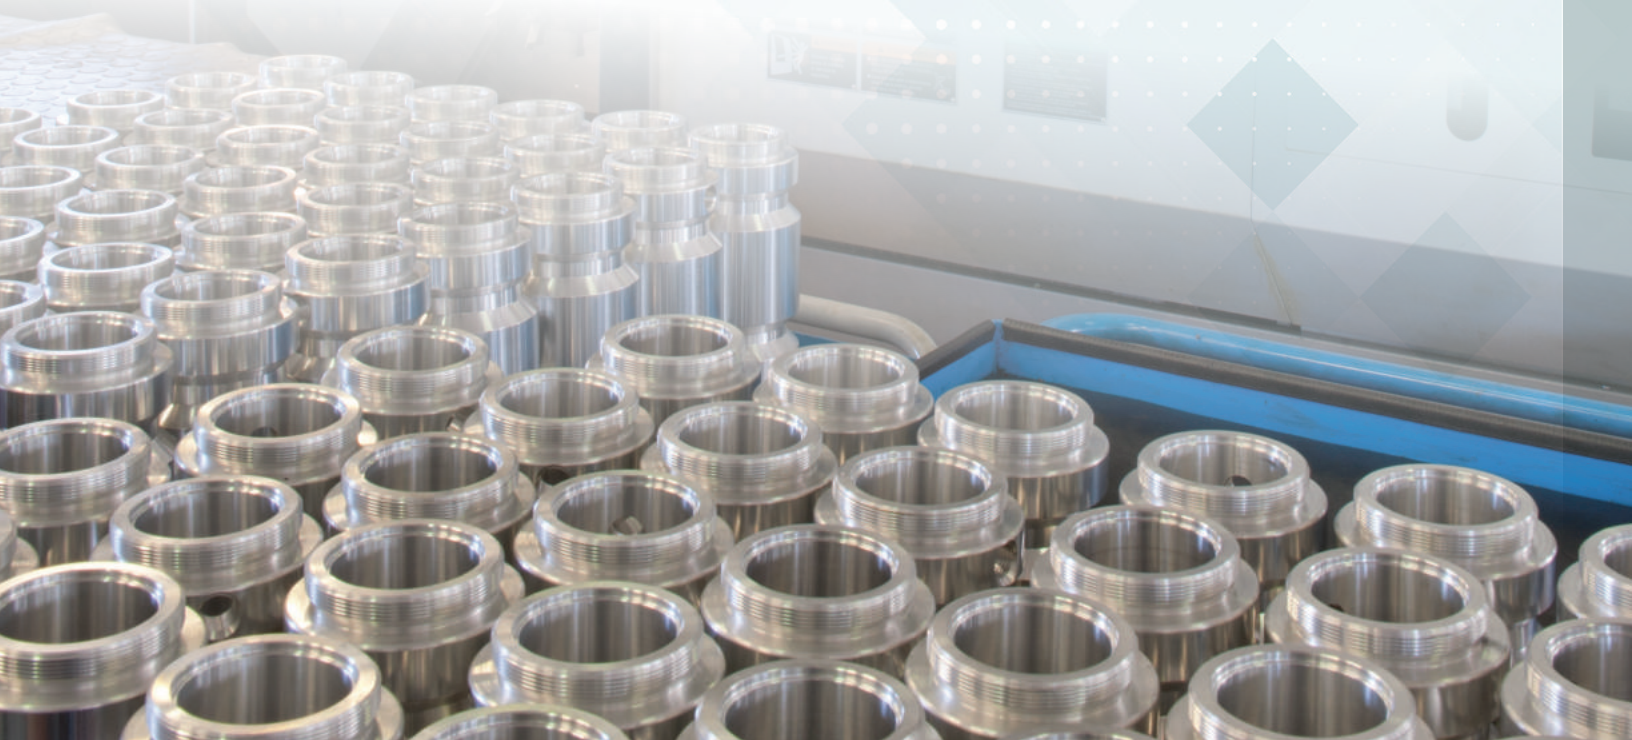

100001	48	150005	52	150515	46	151001	47	201205	148	230050	168
100002	48	150006	52	150516	46	151002	47	201206	148	231001	84
100005	48	150007	42	150599	46	151003	47	201213	148	231121	86
100101	53	150008	42	150601	30	151004	47	201301	128, 232	231141	85
100102	53	150009	44, 172	150602	31	151005	47	201402	130	231201	82
100103	53	150010	44, 172	150603	30	151006	47	201501	127, 282	232001	87
100104	53	150011	44, 172	150604	29	151007	47	201601	129	233401	83
100105	53	150012	44, 172	150605	28	151008	47	201701	129, 282	235100	157
100106	53	150013	45, 173	150606	27	151009	47	201801	128, 232	235110	157
100201	49	150014	45, 173	150607	26	151010	47	202102	118	235210	156
100301	52	150015	45, 173	150608	29	151011	47	202103	118	235225	156
100302	52	150017	54, 191	150609	29	151012	47	202301	117	241203	112
100303	52	150018	54, 191	150610	27	151013	47	203301	167	241204	112
100401	51	150019	54	150611	27	151014	47	203302	167	241205	112
100402	51	150020	54	150612	28	151016	52	203303	167	241206	112
100501	49	150021	54, 191	150613	28	151019	12	203400	184	241207	112
100601	50	150022	54, 191	150614	26	151020	13	203401	163	241208	112
100602	50	150023	54, 191	150615	26	151021	14	203501	164	241209	112
100603	50	150024	54, 191	150702	34	151022	34	203609	136	241210	112
100604	50	150025	54, 191	150703	34	151023	34	203901	179	241215	112
100605	50	150026	54, 191	150704	34	151024	35	203902	179	241220	112
100701	50	150027	54, 191	150706	35	151025	35	203903	179	241403	112
100702	51	150032	54, 191	150707	35	151026	41	203904	179	241404	112
100703	51	150033	54, 191	150708	35	151028	10	203905	178	241405	112
100801	40	150150	25	150709	36	151029	11	203906	178	241406	112
100850	40	150205	16	150710	36	152401	31	203907	178	241407	112
100899	40	150206	16	150711	36	152801	5	203908	178	241408	112
100901	41	150207	16	150712	36	152802	7	203909	179	241409	112
101001	48	150208	16	150713	36	152803	8	203910	178	241410	112
101002	48	150209	16	150714	36	152804	9	204001	180	241415	112
101101	49	150210	16	150715	36	152805	6	204002	180	241420	112
101102	49	150211	16	150716	34	152806	4	204003	180	241503	113
101103	49	150212	16	150717	34	153201	23	204009	180	241504	113
101201	38	150213	15	150801	37	153301	22	204101	182	241505	113
101301	38	150214	15	150802	37	153401	20	204102	182	241506	113
101401	38	150215	15	150803	37	153402	20	204201	183	241507	113
101601	38	150250	25	150804	37	153501	19	204301	183	241508	113
101701	39	150301	24	150805	37	153601	34	204401	183	241509	113
101801	39	150302	24	150806	37	153602	34	204601	170	241510	113
101901	39	150313	22	150807	37	153801	46	204701	170	241515	113
102001	51	150315	18	150808	37	153802	46	210001	150	241520	113
102101	50	150319	18	150821	37	153803	46	210003	150	242203	113
102201	51	150321	19	150822	37	153811	23	221001	90, 207	242204	113
102304	32	150401	21	150823	37	200010	183	221121	92	242205	113
102305	32	150402	21	150901	37	200301	182	221141	91	242206	113
102306	32	150403	17	150903	37	200401	181	221205	88	242207	113
103701	47	150404	17	150904	37	200402	181	204601	170	242208	113
103702	47	150501	46	150907	37	200501	181	204701	170	242209	113
103703	47	150502	46	150909	37	200502	181	210001	150	242210	113
130004	42	150504	46	150911	37	200601	130, 233	210003	150	242215	113
130006	42	150505	46	150913	37	200701	130, 233	221001	90, 207	242220	113
130100	43	150506	46	150914	54, 191	200801	183, 239	221121	92	242403	114
130200	43	150507	46	150915	54, 191	201000	184	221141	91	242404	114
130300	43	150508	46	150916	52	201001	124, 230	221205	88	242405	114
130400	43	150509	46	150917	52	201005	123	222001	93	242406	114
150001	52	150510	46	150925	37	201016	123	223401	89	242407	114
150002	52	150511	46	150936	37	201101	125, 233	230030	168	242408	114
150003	37	150512	46	150939	37	201201	125, 229	230040	168	242409	114

<b>242410</b>	114	<b>250011</b>	170	<b>250330</b>	103	<b>251011</b>	109	<b>254201</b>	160	<b>260062</b>	118, 225
<b>242415</b>	114	<b>250013</b>	171	<b>250331</b>	103	<b>251012</b>	109	<b>254430</b>	144	<b>260068</b>	60
<b>242420</b>	114	<b>250014</b>	171	<b>250334</b>	102	<b>251013</b>	109	<b>254431</b>	144	<b>260103</b>	80
<b>242503</b>	114	<b>250015</b>	174	<b>250336</b>	102	<b>251014</b>	109	<b>255001</b>	141	<b>260121</b>	186
<b>242504</b>	114	<b>250016</b>	174	<b>250338</b>	98	<b>251015</b>	109	<b>255002</b>	142	<b>260122</b>	186
<b>242505</b>	114	<b>250017</b>	174	<b>250339</b>	98	<b>251016</b>	110	<b>255003</b>	143	<b>260123</b>	186
<b>242506</b>	114	<b>250018</b>	174	<b>250340</b>	97	<b>251017</b>	110	<b>255004</b>	143	<b>260124</b>	186
<b>242507</b>	114	<b>250019</b>	182	<b>250341</b>	97	<b>251018</b>	110	<b>255005</b>	141	<b>260125</b>	186
<b>242508</b>	114	<b>250029</b>	190	<b>250342</b>	96	<b>251019</b>	110	<b>256591</b>	131	<b>260126</b>	186
<b>242509</b>	114	<b>250030</b>	170	<b>250343</b>	96	<b>251101</b>	111	<b>256592</b>	131	<b>260129</b>	145
<b>242510</b>	114	<b>250033</b>	189	<b>250344</b>	104	<b>251102</b>	111	<b>256593</b>	131	<b>260130</b>	145
<b>242515</b>	114	<b>250034</b>	189	<b>250401</b>	121	<b>251103</b>	111	<b>256599</b>	131	<b>300101</b>	127, 229
<b>242520</b>	114	<b>250035</b>	189	<b>250404</b>	120	<b>251104</b>	111	<b>257004</b>	159	<b>300201</b>	126, 231
<b>243203</b>	115	<b>250036</b>	166	<b>250405</b>	120	<b>251105</b>	111	<b>257006</b>	159	<b>300301</b>	126, 231
<b>243204</b>	115	<b>250037</b>	166	<b>250416</b>	150	<b>251106</b>	111	<b>257014</b>	158	<b>300401</b>	124, 230
<b>243205</b>	115	<b>250038</b>	166	<b>250417</b>	150	<b>251107</b>	111	<b>257016</b>	158	<b>301301</b>	197
<b>243206</b>	115	<b>250039</b>	164	<b>250419</b>	122	<b>251108</b>	111	<b>257103</b>	175	<b>301302</b>	195
<b>243207</b>	115	<b>250040</b>	163	<b>250421</b>	120	<b>251109</b>	111	<b>257105</b>	175	<b>301601</b>	213
<b>243208</b>	115	<b>250042</b>	163	<b>250422</b>	119	<b>251110</b>	111	<b>257110</b>	175	<b>301602</b>	215
<b>243209</b>	115	<b>250043</b>	164	<b>250502</b>	147	<b>251111</b>	111	<b>257121</b>	176	<b>301603</b>	216
<b>243210</b>	115	<b>250066</b>	165	<b>250503</b>	146	<b>251112</b>	111	<b>257122</b>	176	<b>301603-1</b>	198
<b>243215</b>	115	<b>250067</b>	165	<b>250505</b>	122, 227	<b>251113</b>	111	<b>257123</b>	176	<b>301604</b>	216
<b>243220</b>	115	<b>250101</b>	58	<b>250530</b>	169, 238	<b>251114</b>	111	<b>257124</b>	176	<b>301701</b>	213
<b>243403</b>	115	<b>250106</b>	76	<b>250701</b>	152	<b>251115</b>	111	<b>257125</b>	176	<b>301702</b>	215
<b>243404</b>	115	<b>250107</b>	72	<b>250702</b>	152	<b>251801</b>	185	<b>257131</b>	177	<b>302301</b>	237
<b>243405</b>	115	<b>250108</b>	73	<b>250703</b>	152	<b>251803</b>	185	<b>257132</b>	177	<b>302402</b>	237
<b>243406</b>	115	<b>250109</b>	74	<b>250704</b>	153	<b>251804</b>	185	<b>257133</b>	177	<b>302500</b>	237
<b>243407</b>	115	<b>250110</b>	75	<b>250705</b>	153	<b>251810</b>	185	<b>257134</b>	177	<b>302701</b>	226
<b>243408</b>	115	<b>250111</b>	77	<b>250706</b>	153	<b>251820</b>	185	<b>257135</b>	177	<b>302702</b>	226
<b>243409</b>	115	<b>250112</b>	78	<b>250721</b>	154	<b>251830</b>	185	<b>258004</b>	159	<b>302705</b>	226
<b>243410</b>	115	<b>250200</b>	95	<b>250722</b>	154	<b>251840</b>	185	<b>258006</b>	159	<b>302801</b>	226
<b>243415</b>	115	<b>250202</b>	94	<b>250723</b>	154	<b>251901</b>	61	<b>258014</b>	158	<b>302802</b>	226
<b>243420</b>	115	<b>250212</b>	95	<b>250724</b>	155	<b>251902</b>	63	<b>258016</b>	158	<b>302901</b>	221
<b>243503</b>	116	<b>250250</b>	119	<b>250725</b>	155	<b>251903</b>	69	<b>259709</b>	188	<b>302902</b>	221
<b>243504</b>	116	<b>250251</b>	119	<b>250726</b>	155	<b>251904</b>	71	<b>259710</b>	188	<b>302903</b>	221
<b>243505</b>	116	<b>250252</b>	120	<b>250731</b>	182	<b>251905</b>	79	<b>259711</b>	188	<b>302904</b>	222
<b>243506</b>	116	<b>250253</b>	120	<b>250801</b>	147	<b>251920</b>	81	<b>259712</b>	188	<b>302905</b>	222
<b>243507</b>	116	<b>250258</b>	121	<b>250802</b>	140	<b>252101</b>	161	<b>259713</b>	188	<b>302906</b>	222
<b>243508</b>	116	<b>250259</b>	121	<b>250803</b>	139	<b>252102</b>	161	<b>259714</b>	188	<b>302907</b>	222
<b>243509</b>	116	<b>250270</b>	121	<b>250805</b>	139	<b>252201</b>	162	<b>260003</b>	168, 244	<b>302908</b>	222
<b>243510</b>	116	<b>250271</b>	121	<b>250807</b>	133	<b>252202</b>	162	<b>260013</b>	108	<b>302909</b>	222
<b>243511</b>	116	<b>250272</b>	121	<b>250808</b>	132	<b>252910</b>	190	<b>260015</b>	108	<b>302910</b>	221
<b>243512</b>	116	<b>250275</b>	117	<b>250811</b>	138	<b>252920</b>	190	<b>260016</b>	108	<b>302911</b>	221
<b>247034</b>	187	<b>250277</b>	117	<b>250814</b>	134	<b>253001</b>	147	<b>260017</b>	109	<b>302912</b>	221
<b>247100</b>	187	<b>250301</b>	106	<b>250815</b>	136	<b>253101</b>	101	<b>260018</b>	109	<b>302913</b>	224
<b>247112</b>	187	<b>250302</b>	106	<b>250816</b>	137	<b>253201</b>	104	<b>260019</b>	109	<b>302914</b>	224
<b>247114</b>	187	<b>250303</b>	104	<b>250817</b>	137	<b>253601</b>	140	<b>260020</b>	109	<b>302915</b>	224
<b>247200</b>	187	<b>250307</b>	105	<b>250901</b>	146	<b>253602</b>	132	<b>260021</b>	109	<b>303001</b>	242
<b>247343</b>	191	<b>250308</b>	105	<b>250903</b>	141	<b>253603</b>	134	<b>260024</b>	70	<b>303002</b>	242
<b>247344</b>	191	<b>250310</b>	99	<b>250906</b>	142	<b>253604</b>	138	<b>260026</b>	62	<b>303003</b>	242
<b>247345</b>	191	<b>250312</b>	99	<b>251001</b>	108	<b>253605</b>	133	<b>260029</b>	68	<b>303004</b>	242
<b>250000</b>	122	<b>250314</b>	99	<b>251003</b>	108	<b>253606</b>	138	<b>260030</b>	165	<b>303005</b>	242
<b>250001</b>	121	<b>250316</b>	100	<b>251005</b>	108	<b>253607</b>	135	<b>260031</b>	65	<b>303007</b>	241
<b>250002</b>	121	<b>250318</b>	100	<b>251006</b>	108	<b>253608</b>	139	<b>260038</b>	67	<b>303008</b>	241
<b>250006</b>	171	<b>250320</b>	100	<b>251007</b>	108	<b>253609</b>	135	<b>260048</b>	64	<b>303009</b>	241
<b>250007</b>	184	<b>250322</b>	101	<b>251008</b>	109	<b>253801</b>	108	<b>260050</b>	66	<b>303020</b>	240
<b>250008</b>	184	<b>250326</b>	101	<b>251009</b>	109	<b>253802</b>	108	<b>260059</b>	59	<b>303021</b>	240
<b>250009</b>	184	<b>250329</b>	103	<b>251010</b>	109	<b>254101</b>	160	<b>260061</b>	122	<b>303022</b>	240

<b>303023</b>	240	<b>350234</b>	223	<b>413815</b>	309	<b>450377</b>	306	<b>505082</b>	266	<b>571160</b>	284
<b>303024</b>	240	<b>350235</b>	223	<b>440110</b>	294	<b>450378</b>	306	<b>505083</b>	263	<b>571200</b>	285
<b>303025</b>	240	<b>350236</b>	223	<b>440120</b>	294	<b>450379</b>	308	<b>505085</b>	266	<b>700001</b>	316
<b>303026</b>	241	<b>350237</b>	223	<b>440130</b>	294	<b>500101</b>	280	<b>505087</b>	265	<b>700101</b>	317
<b>303027</b>	241	<b>350238</b>	223	<b>440310</b>	295	<b>500102</b>	280	<b>505090</b>	261	<b>700102</b>	318
<b>303028</b>	241	<b>350239</b>	242	<b>440320</b>	295	<b>500201</b>	281	<b>505091</b>	262	<b>700103</b>	318
<b>303101</b>	234	<b>350240</b>	218	<b>440330</b>	295	<b>500611</b>	273	<b>505093</b>	259	<b>700104</b>	318
<b>303102</b>	234	<b>350241</b>	218	<b>440510</b>	296	<b>500612</b>	273	<b>505094</b>	261	<b>700201</b>	319
<b>303201</b>	239	<b>350242</b>	198	<b>440520</b>	296	<b>500613</b>	273	<b>505095</b>	262	<b>700202</b>	319
<b>303202</b>	239	<b>350245</b>	224	<b>440530</b>	296	<b>500621</b>	272	<b>505097</b>	259	<b>700203</b>	319
<b>303203</b>	239	<b>350246</b>	224	<b>450103</b>	307	<b>500622</b>	272	<b>505098</b>	261	<b>700301</b>	320
<b>310085</b>	236	<b>350247</b>	224	<b>450104</b>	307	<b>500623</b>	272	<b>505215</b>	263	<b>700302</b>	320
<b>310087</b>	236	<b>350248</b>	243	<b>450110</b>	307	<b>500631</b>	271	<b>505220</b>	262	<b>700401</b>	320
<b>310090</b>	244	<b>350249</b>	243	<b>450111</b>	307	<b>500632</b>	271	<b>505221</b>	260	<b>700402</b>	321
<b>310091</b>	244	<b>350250</b>	243	<b>450112</b>	307	<b>500633</b>	271	<b>505222</b>	260	<b>700403</b>	321
<b>340040</b>	220	<b>350257</b>	243	<b>450113</b>	307	<b>500801</b>	276	<b>505223</b>	260	<b>700492</b>	321
<b>340060</b>	220	<b>350258</b>	243	<b>450201</b>	312	<b>500950</b>	279	<b>520020</b>	275	<b>700493</b>	321
<b>340130</b>	220	<b>350259</b>	243	<b>450202</b>	312	<b>501000</b>	287	<b>520040</b>	275	<b>700402</b>	321
<b>350001</b>	244	<b>350260</b>	225	<b>450203</b>	312	<b>501002</b>	290	<b>520100</b>	275	<b>700403</b>	321
<b>350012</b>	197	<b>350312</b>	215	<b>450204</b>	312	<b>501003</b>	286	<b>520160</b>	275	<b>700492</b>	321
<b>350013</b>	196	<b>352110</b>	196	<b>450317</b>	308	<b>501004</b>	286	<b>520200</b>	275	<b>700493</b>	321
<b>350032</b>	217	<b>352220</b>	194	<b>450318</b>	308	<b>501013</b>	286	<b>520201</b>	275		
<b>350033</b>	217	<b>354110</b>	212	<b>450319</b>	308	<b>501014</b>	286	<b>540120</b>	252		
<b>350070</b>	244	<b>354220</b>	211	<b>450320</b>	308	<b>501099</b>	287	<b>540340</b>	253		
<b>350071</b>	214	<b>359000</b>	227	<b>450321</b>	308	<b>501401</b>	277	<b>540380</b>	254		
<b>350072</b>	214	<b>359005</b>	227	<b>450322</b>	308	<b>501501</b>	287	<b>541000</b>	255		
<b>350073</b>	212	<b>359010</b>	235	<b>450323</b>	308	<b>501550</b>	290	<b>541120</b>	256		
<b>350074</b>	211	<b>359011</b>	235	<b>450324</b>	308	<b>501601</b>	287	<b>541140</b>	257		
<b>350101</b>	219	<b>359012</b>	235	<b>450325</b>	308	<b>501701</b>	290	<b>542000</b>	258		
<b>350102</b>	219	<b>359013</b>	235	<b>450333</b>	311	<b>501801</b>	290	<b>550055</b>	278		
<b>350103</b>	219	<b>359023</b>	234	<b>450334</b>	311	<b>505000</b>	248	<b>550057</b>	278		
<b>350104</b>	219	<b>359025</b>	234	<b>450335</b>	311	<b>505001</b>	249	<b>550100</b>	274		
<b>350105</b>	219	<b>359053</b>	236	<b>450336</b>	311	<b>505002</b>	279	<b>550102</b>	274		
<b>350106</b>	219	<b>359055</b>	236	<b>450338</b>	305	<b>505003</b>	277	<b>550103</b>	274		
<b>350107</b>	219	<b>400101</b>	310	<b>450339</b>	305	<b>505004</b>	277	<b>550203</b>	275		
<b>350108</b>	219	<b>400201</b>	310	<b>450346</b>	308	<b>505005</b>	289	<b>550204</b>	275		
<b>350109</b>	219	<b>400301</b>	303	<b>450349</b>	302	<b>505006</b>	289	<b>550301</b>	289		
<b>350110</b>	195	<b>400401</b>	303	<b>450350</b>	302	<b>505007</b>	289	<b>550320</b>	289		
<b>350201</b>	220	<b>400501</b>	303	<b>450351</b>	305	<b>505008</b>	290	<b>552110</b>	249		
<b>350202</b>	220	<b>400601</b>	299	<b>450352</b>	305	<b>505009</b>	264	<b>553010</b>	283		
<b>350203</b>	220	<b>400701</b>	299	<b>450353</b>	305	<b>505010</b>	266	<b>555001</b>	279		
<b>350204</b>	220	<b>400720</b>	298	<b>450354</b>	305	<b>505011</b>	264	<b>557012</b>	251		
<b>350205</b>	220	<b>400801</b>	299	<b>450360</b>	301	<b>505012</b>	270	<b>557120</b>	251		
<b>350206</b>	220	<b>400820</b>	298	<b>450361</b>	300	<b>505013</b>	268	<b>560002</b>	264		
<b>350207</b>	220	<b>400918</b>	312	<b>450362</b>	297	<b>505014</b>	276	<b>560003</b>	268		
<b>350208</b>	220	<b>411201</b>	311	<b>450364</b>	305	<b>505016</b>	281	<b>560004</b>	289		
<b>350209</b>	220	<b>411203</b>	309	<b>450365</b>	301	<b>505019</b>	290	<b>560007</b>	283		
<b>350213</b>	219	<b>411206</b>	309	<b>450366</b>	300	<b>505020</b>	248	<b>560011</b>	250		
<b>350214</b>	219	<b>411210</b>	309	<b>450367</b>	297	<b>505030</b>	265	<b>560012</b>	288		
<b>350215</b>	219	<b>411215</b>	309	<b>450368</b>	305	<b>505050</b>	276	<b>560013</b>	288		
<b>350216</b>	228	<b>411401</b>	311	<b>450369</b>	306	<b>505074</b>	269	<b>560014</b>	283		
<b>350219</b>	228	<b>411403</b>	309	<b>450370</b>	305	<b>505075</b>	270	<b>560019</b>	283		
<b>350220</b>	194	<b>411406</b>	309	<b>450371</b>	305	<b>505076</b>	267	<b>560020</b>	268		
<b>350221</b>	228	<b>411410</b>	309	<b>450372</b>	306	<b>505077</b>	269	<b>560021</b>	250		
<b>350224</b>	225	<b>411415</b>	309	<b>450373</b>	306	<b>505078</b>	270	<b>560022</b>	288		
<b>350225</b>	225	<b>413803</b>	309	<b>450374</b>	306	<b>505079</b>	267	<b>560023</b>	288		
<b>350232</b>	220	<b>413806</b>	309	<b>450375</b>	306	<b>505080</b>	269	<b>560024</b>	288		
<b>350233</b>	223	<b>413810</b>	309	<b>450376</b>	306	<b>505081</b>	265	<b>570600</b>	284		



**GREASE**

**GREASE**  
**GR**



PUMPS

## AIR OPERATED PUMPS

- PAGE 4 - REGULAR 60:1 AND 70:1
- PAGE 9 - INDUSTRIAL PUMPS



KITS

## GREASE KITS

- PAGE 15 - FRAME LIFTER
- PAGE 17 - 400 LBS KITS
- PAGE 21 - 120 LBS KITS
- PAGE 23 - 35 LBS KITS



MANUAL PUMPS

## MANUAL PUMPS

- PAGE 25 - 120 LBS PUMPS
- PAGE 28 - 35 LBS PUMPS



HOSE REELS

## HOSE REELS

- PAGE 33 - HOSE REELS - UP TO 50 FT
- PAGE 34 - HOSE REELS - UP TO 100 FT
- PAGE 35 - HOSE REELS - ENCLOSED REELS



HOSES

## HOSES

- PAGE 37 - HOSES FOR REELS AND CONNECTION HOSES



NOZZLES / GUNS

## GREASE NOZZLES AND GUNS

- PAGE 38 - GREASE GUNS
- PAGE 40 - GREASE NOZZLES / GREASE CONTROL HANDLE



ACCESSORIES

## GREASE ACCESSORIES

- PAGE 42 - CABINETS AND BRACKETS FOR HOSE REELS
- PAGE 46 - LIDS AND FOLLOWER PLATES
- PAGE 48 - SWIVELS AND GREASE CONTROL HANDLE PROTECTION
- PAGE 50 - FITTINGS



## AIR OPERATED GREASE PUMPS

The new patented air-operated grease pumps are fully designed and manufactured by WOLFLUBE, which shows remarkable operating features. It is fully assembled with electronic machine tools and the parts have been carefully tested to assure reliability and a long life of the products. The choice of materials and manufacturing quality make this pump suitable to work in the worst environmental conditions.

- Brand new fully air operated motion reverse device, without cams and springs.
- Reduced number of moving parts.
- Large quantity of grease supplied at low air consumption.
- High operating pressure.
- Aluminum alloy bodied pump with electrolytic treatment that ensures very high corrosion strength.



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



## AIR OPERATED GREASE PUMP FOR 35 LBS DRUM - 60:1 FREE FLOW RATE 3.5 LBS/MIN

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES





### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR :

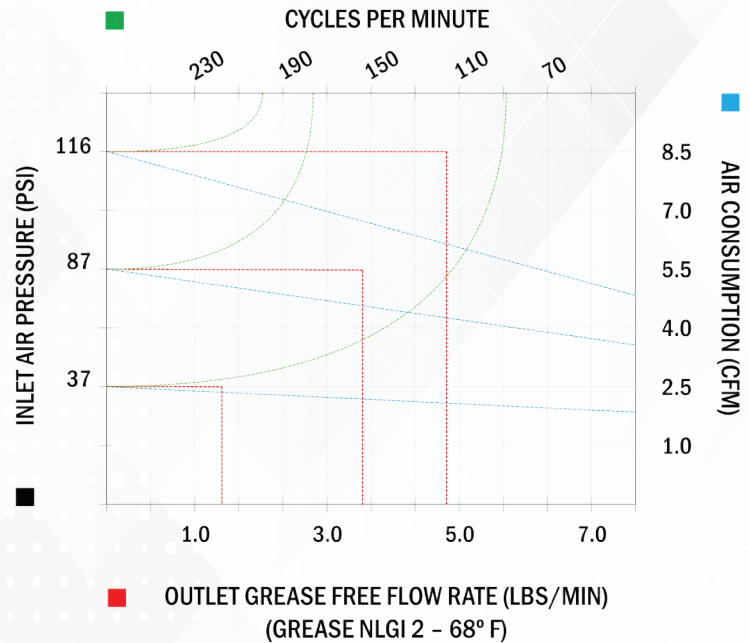

### TECHNICAL DATA


SKU	152806
PUMP RATIO	60:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	3.5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/4" NPT(m)
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
NOISE	76 dB
SEAL	Polyurethane
SHANK DIAMETER	1.18"
SHANK LENGTH	13"
FOR DRUMS (DRUM SIZE)	35 lbs Drum
WEIGHT	11 lbs

The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**152806**


GREASE GR

## AIR OPERATED GREASE PUMP FOR 45 to 60 LBS DRUM - 60:1 FREE FLOW RATE 3.5 LBS/MIN

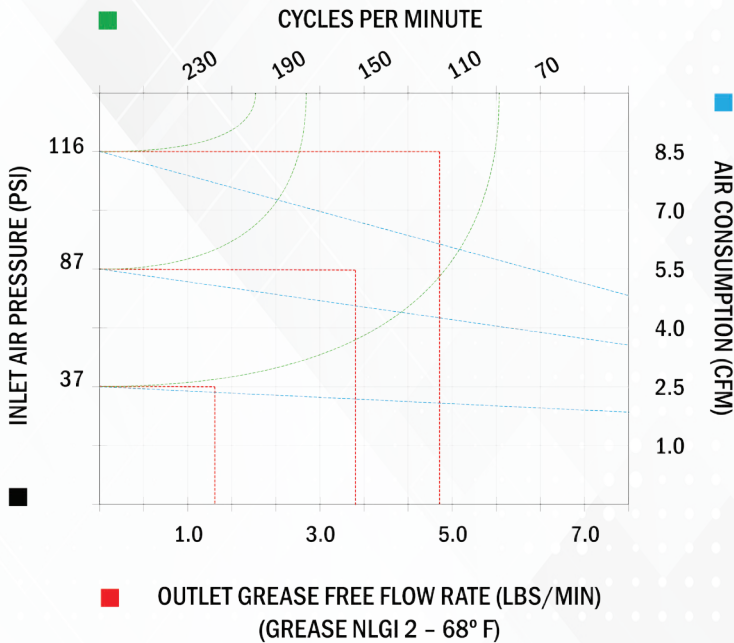


### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



### TECHNICAL DATA

SKU	152801
PUMP RATIO	60:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	3.5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/4" NPT(m)
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
NOISE	76 dB
SEAL	Polyurethane
SHANK DIAMETER	1.18"
SHANK LENGTH	19"
FOR DRUMS (DRUM SIZE)	45 to 65 lbs Drum
WEIGHT	12 lbs

The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**152801**



## AIR OPERATED GREASE PUMP FOR 120 LBS DRUM - 60:1 FREE FLOW RATE 3.5 LBS/MIN

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR :

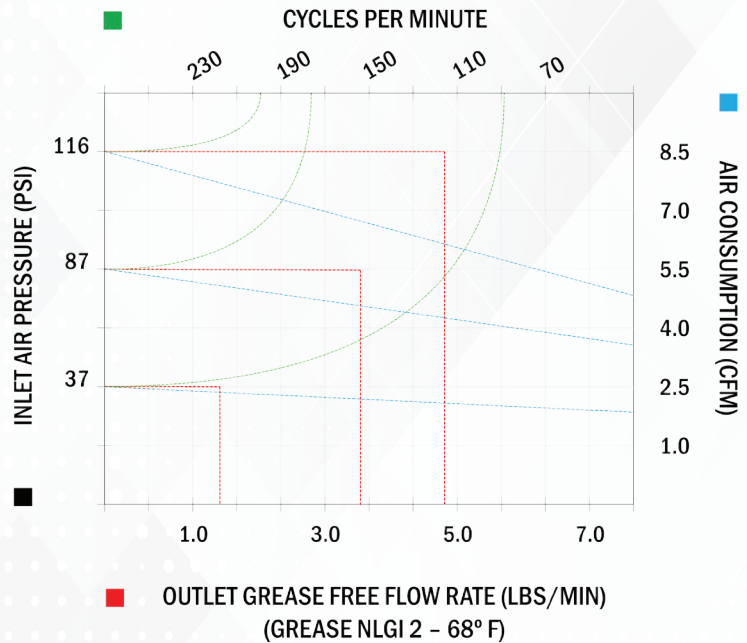

### TECHNICAL DATA


SKU	152805
PUMP RATIO	60:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	3.5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/4" NPT(m)
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
NOISE	76 dB
SEAL	Polyurethane
SHANK DIAMETER	1.18"
SHANK LENGTH	29.5"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	14 lbs

**152805**

The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.


**GREASE GR**

## AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 60:1 FREE FLOW RATE 3.5 LBS/MIN

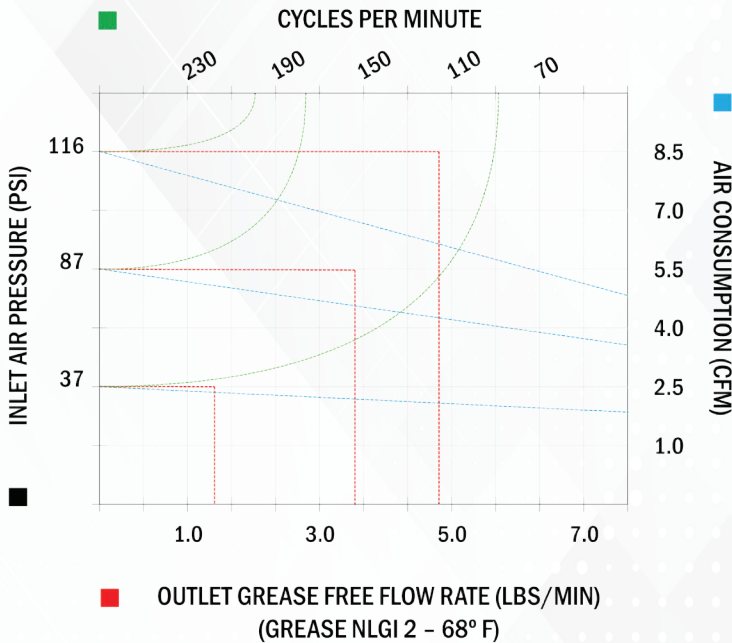

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



TECHNICAL DATA	
SKU	152802
PUMP RATIO	60:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	3.5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/4" NPT(m)
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
NOISE	76 dB
SEAL	Polyurethane
SHANK DIAMETER	1.18"
SHANK LENGTH	37.4"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	16 lbs

The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**152802**



## AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 70:1 FREE FLOW RATE 2.4 LBS/MIN

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR :

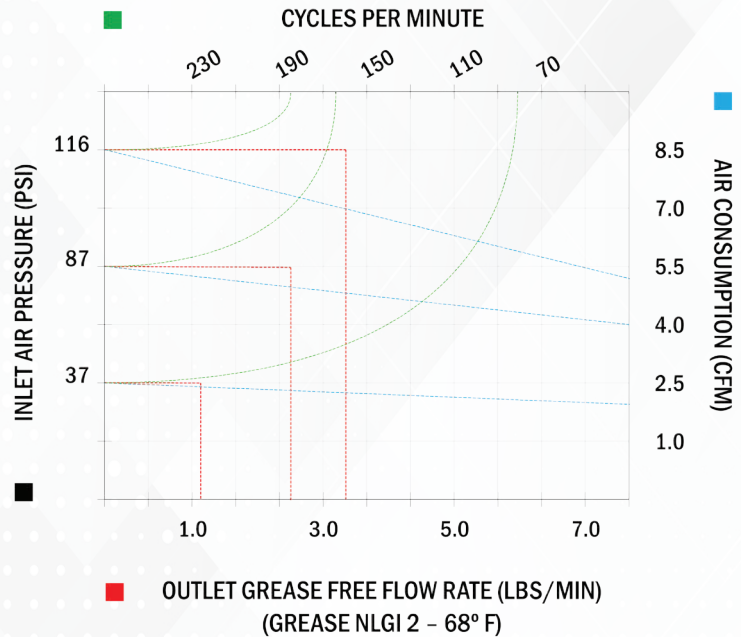

### TECHNICAL DATA

SKU	152803
PUMP RATIO	70:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	4.0 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/4" NPT(m)
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
NOISE	76 dB
SEAL	Polyurethane
SHANK DIAMETER	1.18"
SHANK LENGTH	37.4"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	16 lbs

The pumps are suitable for the central supply of plants where a major measure of grease and major use of pressure at a long and short distance is required. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**152803**

**GREASE GR**

## IND. AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 50:1 FREE FLOW RATE 9.9 LBS/MIN

PUMPS

KITS


MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES

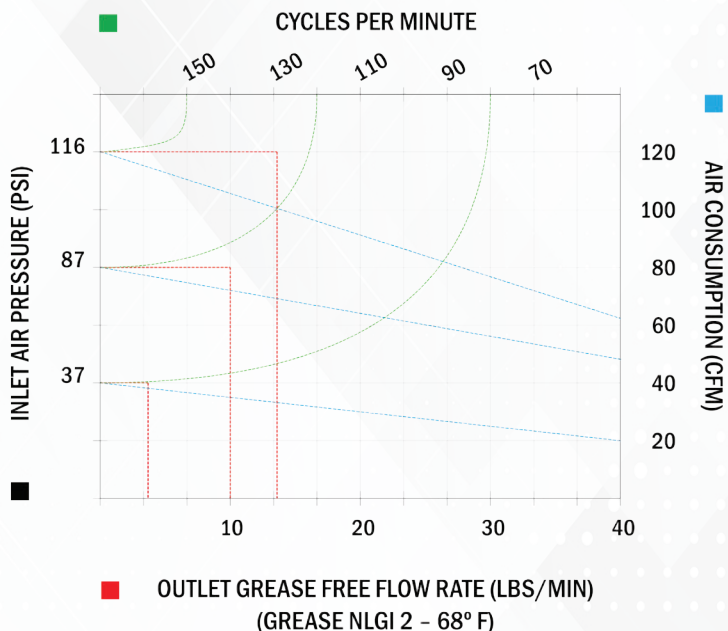

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



### SUITABLE FOR :



TECHNICAL DATA	
SKU	152804
PUMP RATIO	50:1
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46.4 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	9.9 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.77"
SHANK LENGTH	37.0"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	47 lbs

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**152804**




## IND. AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 70:1 FREE FLOW RATE 15.5 LBS/MIN




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



SUITABLE FOR :

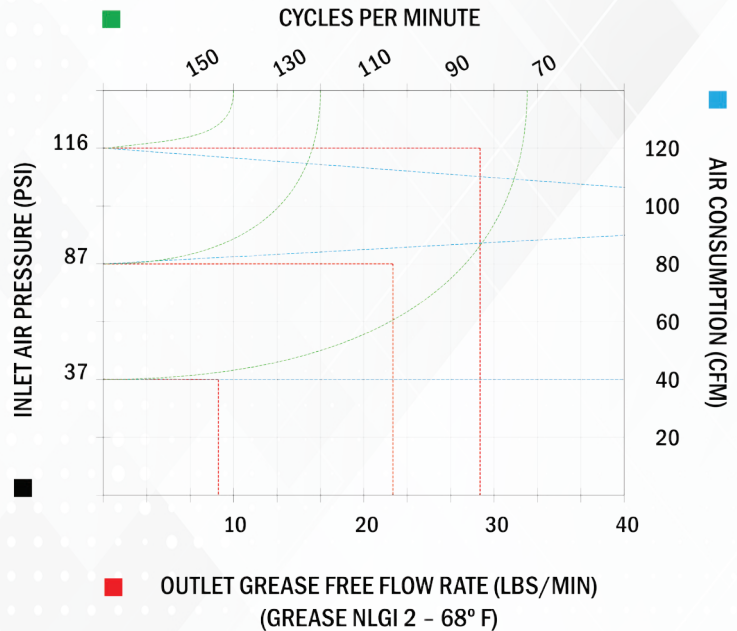

### TECHNICAL DATA


SKU	151029
PUMP RATIO	70:1
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	86.8 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	15.5 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	37.0"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	61 lbs

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**151029**


**GREASE GR**

## IND. AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 75:1 FREE FLOW RATE 9.9 LBS/MIN

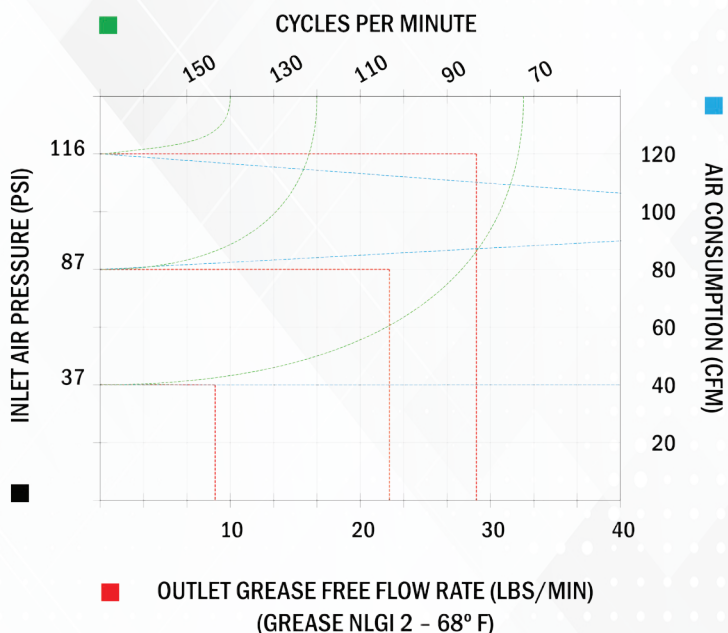

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



SUITABLE FOR :



### TECHNICAL DATA

SKU	151028
PUMP RATIO	75:1
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	86.8 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	9.9 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.77"
SHANK LENGTH	37.0"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	51 lbs

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**151028**

## IND. AIR OPERATED GREASE PUMP FOR RAM LIFTER - 40:1 FREE FLOW RATE 22.0 LBS/MIN



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



### SUITABLE FOR :

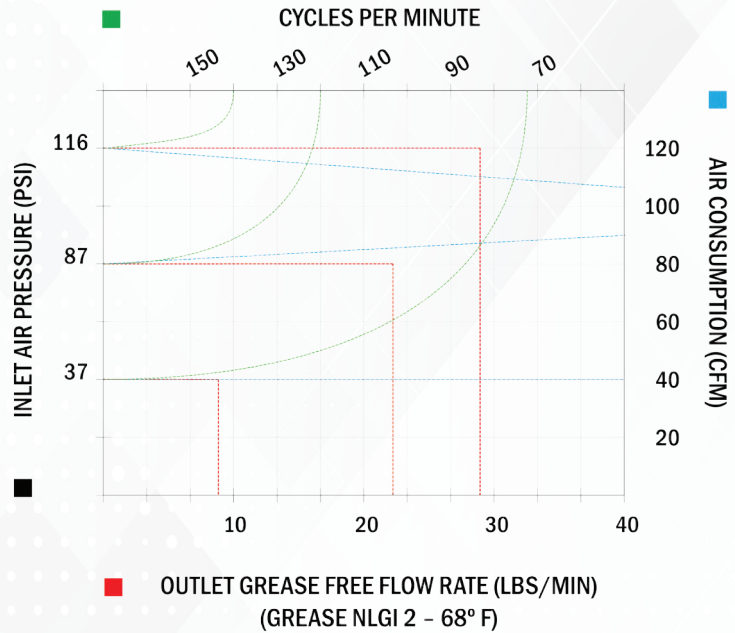

### TECHNICAL DATA

SKU	151019
PUMP RATIO	40:1
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46.4 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	22.0 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	23.6"
FOR DRUMS (DRUM SIZE)	RAM Lifter
WEIGHT	47 lbs

**151019**

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**GREASE GR**

## IND. AIR OPERATED GREASE PUMP FOR RAM LIFTER - 50:1 FREE FLOW RATE 9.9 LBS/MIN

PUMPS

KITS


MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES

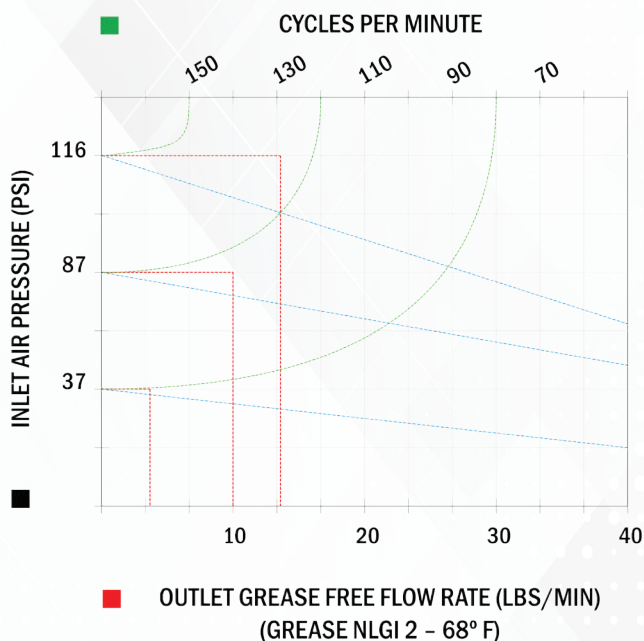

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



### SUITABLE FOR :



TECHNICAL DATA	
SKU	151020
PUMP RATIO	50:1
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46.4 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	9.9 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.77"
SHANK LENGTH	19.7"
FOR DRUMS (DRUM SIZE)	RAM Lifter
WEIGHT	41 lbs

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**151020**


## IND. AIR OPERATED GREASE PUMP FOR RAM LIFTER - 70:1 FREE FLOW RATE 15.5 LBS/MIN

GREASE GR




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



SUITABLE FOR :

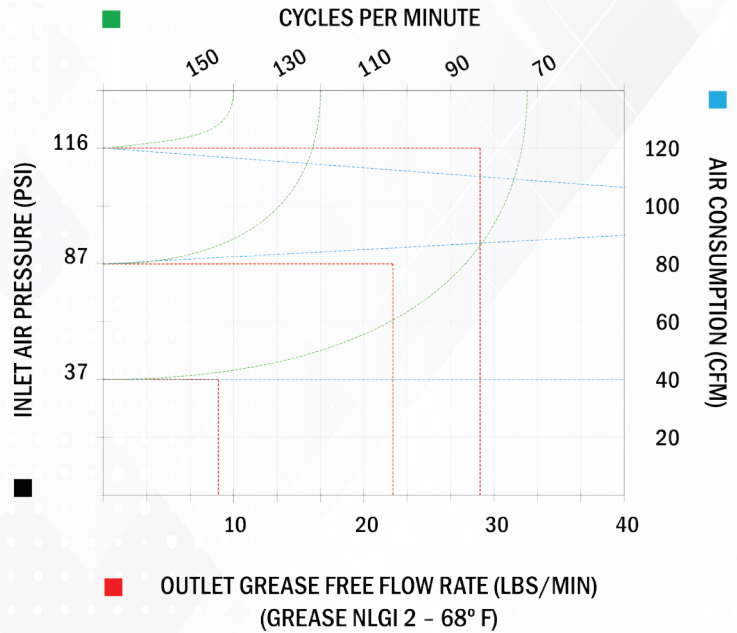

### TECHNICAL DATA

SKU	151021
PUMP RATIO	70:1
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	86.8 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	15.5 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	23.6"
FOR DRUMS (DRUM SIZE)	RAM Lifter
WEIGHT	51 lbs

**151021**

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Mining
- Industrial application
- Service shops
- Fleet service facilities
- Grease transfer

SUITABLE FOR :



GREASE GR



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS


ACCESSORIES

### GREASE KIT - RAM - FRAME LIFTER AND PRESS 40:1 - FOR 400 LBS DRUM

SKU	150213
PUMP	151019 - Ind. Air Operated Pump 40:1
FREE FLOW RATE (87 PSI)	22 lbs / min
RAM / LIFTER	150203 - Grease Kit - RAM - Frame Lifter
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	510 lbs

### GREASE KIT - RAM - FRAME LIFTER AND PRESS 50:1 - FOR 400 LBS DRUM


SKU	150214
PUMP	151020 - Ind. Air Operated Pump 50:1
FREE FLOW RATE (87 PSI)	9.9 lbs / min
RAM / LIFTER	150203 - Grease Kit - RAM - Frame Lifter
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	504 lbs

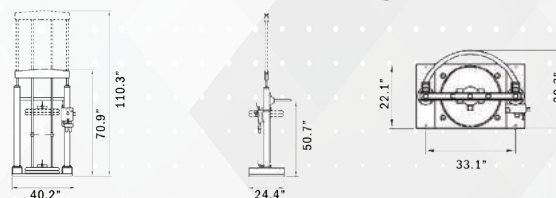

### GREASE KIT - RAM - FRAME LIFTER AND PRESS 70:1 - FOR 400 LBS DRUM

SKU	150215
PUMP	151021 - Ind. Air Operated Pump 70:1
FREE FLOW RATE (87 PSI)	15.5 lbs / min
RAM / LIFTER	150203 - Grease Kit - RAM - Frame Lifter
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	514 lbs

- 1 : Outlet feeding pump air
- 2 : Off position
- 2a : Lifting position up pump and follower plate
- 2b : Acting position down press-fluid
- 3 : Pressure regulator with manometer for feeding lifter air
- 4 : Cock feeding air lifter follower plate
- 5 : Inlet feeding general air into filter end lubricator

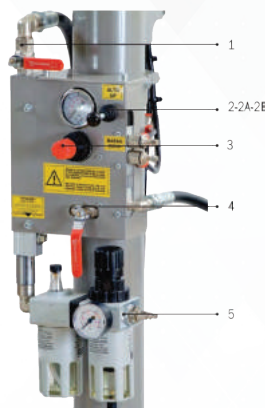

PUMPS

KITS



MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



**RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 1.18"**

SKU	150205
SHANK ADAPTER Ø	1.18"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

**RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 1.77"**

SKU	150206
SHANK ADAPTER Ø	1.77"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

**RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 1.97"**

SKU	150207
SHANK ADAPTER Ø	1.97"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

**RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 2"**

SKU	150208
SHANK ADAPTER Ø	2"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

**Typical Applications**

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Industrial application
- Mining
- Farm/Agriculture
- Service shops
- Fleet service facilities
- Grease transfer

SUITABLE FOR :



MAX. HEIGHT	MIN. HEIGHT	MAX. PRESSURE	PUSHING POWER	VISCOSITY
110.3"	70.9"	116 PSI	58 PSI - 992 LBS 87 PSI - 1433 LBS 116 PSI - 1918 LBS	200 to 500 ASTM (77°F)

Air operated two columns RAM and press for grease and viscous medias.

With its particular 3 ways control valve it lifts or pulls down the pump and the follower plate, improving the exchanging effort of 400 lbs drum.

It is particularly advised for the use with high viscosity grease and medias (from 200CPS to 500ASTM). The follower plate is pushed down by the pressurized pneumatic cylinders, avoiding grease flow interruptions by air pockets in the grease bed. More over, it allows to collect all the grease from the inner walls down to the bottom of the drum, pump suction is assisted. Aluminum follower plate with rubber double ring Ø 23.03in for drum 400 lbs.




	150209	150210	150211	150212
SHANK ADAPTER Ø	1.18"	1.77"	1.97"	2"
WEIGHT	55 LBS	55 LBS	55 LBS	55 LBS

Aluminium casted follower plate for grease and viscous medias with rubber double ring Ø 23.03in for drum 400 lbs suitable for air grease pumps. Equipped with ball valve, breather valve and adaptor.

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities




SUITABLE FOR :



### GREASE KIT - WALL MOUNTED 60:1 WITH 30 FT HOSE REEL - FOR 400 LBS DRUM


SKU	150403
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	153601 - Hose Reel - 1/4" x 30 ft
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	90 lbs

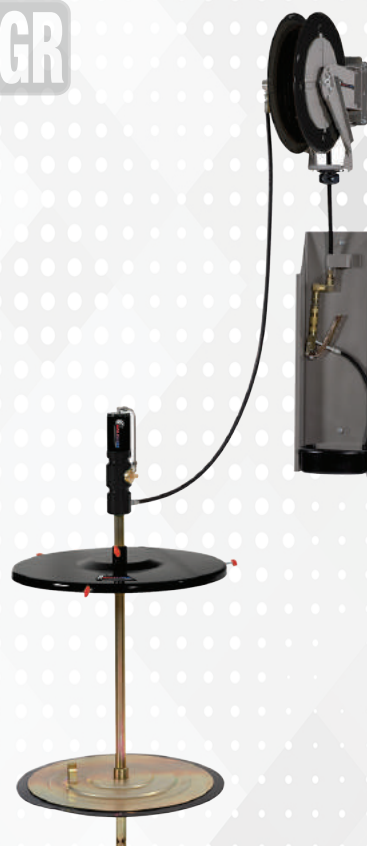

**150403**

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



SUITABLE FOR :



### GREASE KIT - WALL MOUNTED 60:1 WITH 50 FT HOSE REEL - FOR 400 LBS DRUM

SKU	150404
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	150702 - Hose Reel - 1/4" x 50 ft
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	96 lbs



**150404**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES




**150315**



SUITABLE FOR :



400 LBS



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 60:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	150315
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	153601 - Hose Reel - 30 ft x 1/4"
WEIGHT	126 lbs




**150319**



SUITABLE FOR :



400 LBS



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 70:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	150319
PUMP	152803 - 70:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	153601 - Hose Reel - 30 ft x 1/4"
WEIGHT	126 lbs

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



### GREASE KIT - 60:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	153501
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150903 - R2 hose 16 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	(NOT INCLUDED)
WEIGHT	100 lbs



SUITABLE FOR :



400 LBS



**153501**

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



### GREASE KIT - 70:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	150321
PUMP	152803 - 70:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
HOSE	150903 - R2 hose 16 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	(NOT INCLUDED)
WEIGHT	100 lbs



SUITABLE FOR :



400 LBS



**150321**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS


MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

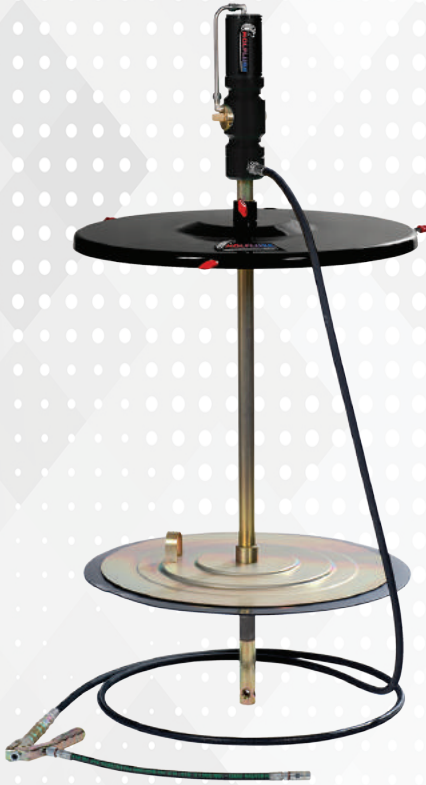

**153401**



SUITABLE FOR :




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 60:1 - FOR 400 LBS DRUM WITHOUT TROLLEY

SKU	153401
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	35 lbs

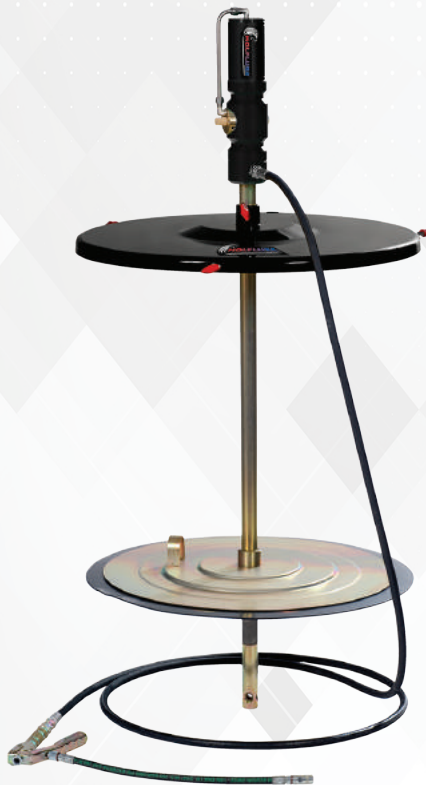

**153402**



SUITABLE FOR :



### Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 70:1 - FOR 400 LBS DRUM WITHOUT TROLLEY

SKU	153402
PUMP	152803 - 70:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	35 lbs

## Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities



### GREASE KIT - WALL MOUNTED - 60:1 FOR 120 LBS DRUM COMPLETE + 30' HOSE REEL


SKU	150401
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	153601 - Hose Reel - 1/4" x 30 ft
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	75 lbs



SUITABLE FOR :




120 LBS

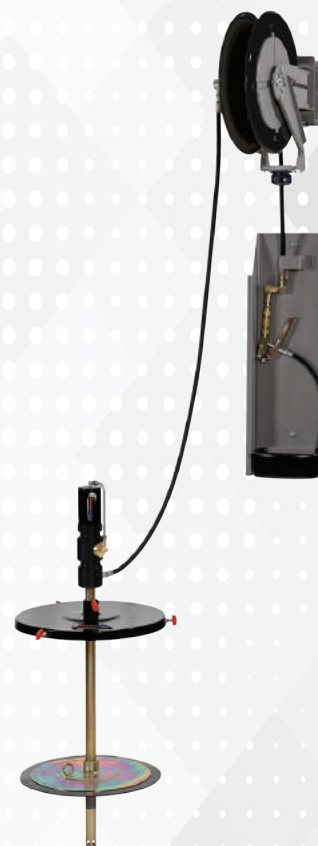

**150401**

## Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities



### GREASE KIT - WALL MOUNTED - 60:1 FOR 120 LBS DRUM COMPLETE + 50' HOSE REEL

SKU	150402
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	150702 - Hose Reel - 1/4" x 50 ft
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	81 lbs



SUITABLE FOR :



120 LBS



**150402**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES




**150313**



SUITABLE FOR :



120 LBS



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 60:1 - FOR 120 LBS DRUM WITH 2 WHEELS TROLLEY

SKU	150313
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
TROLLEY	250038 - Two-wheel trolley
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	44 lbs



\* STANDARD SIZE FOR USA AND CANADA




**153301**



SUITABLE FOR :



120 LBS



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 60:1 - FOR 120 LBS DRUM WITH 2 WHEELS TROLLEY

SKU	153301
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151009 - Follower plate Ø 15.75"
LID / COVER	150509 - Drum cover Ø 16.54"
TROLLEY	250038 - Two-wheel trolley
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	45 lbs

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



### GREASE KIT - 60:1 - FOR 120 LBS DRUM WITHOUT TROLLEY

SKU	153811
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	35 lbs



SUITABLE FOR :




120 LBS



**153811**

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



### GREASE KIT - 60:1 - FOR 45 TO 60 LBS DRUM WITH 2 WHEELS TROLLEY

SKU	153201
PUMP	152801 - 60:1 for 45 to 60 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151004 - Follower plate Ø 12.20"
LID / COVER	153802 - Drum cover Ø 12.60"
TROLLEY	250037 - Two-wheel trolley
FOR DRUMS (DRUM SIZE)	45 to 60 lbs Drum
WEIGHT	40 lbs



SUITABLE FOR :



45 TO 60 LBS



**153201**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS


MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

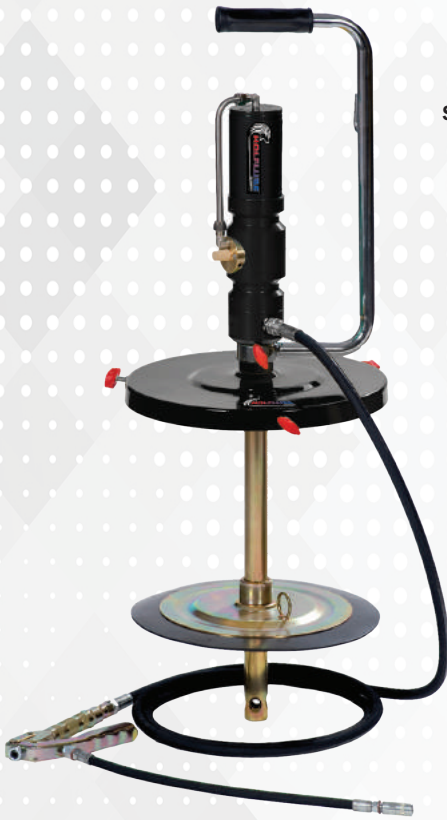

**150302**

GREASE GR

SUITABLE FOR :



45 TO 60 LBS



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - 60:1 - FOR 45 TO 60 LBS DRUM COMPLETE + HANDLE

SKU	150302
PUMP	152806 - 60:1 for 45 to 60 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151004 - Follower plate Ø 12.20"
LID / COVER	153802 - Drum cover Ø 12.6"
FOR DRUMS (DRUM SIZE)	45 to 60 lbs Drum
WEIGHT	27 lbs



**150301**

GREASE GR



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - WHEELED WITH BUCKET 60:1 PUMP - 35 LBS BUCKET CAPACITY

SKU	150301
PUMP	152806 - 60:1 for 35 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151001 - Follower plate Ø 8.66"
WEIGHT	40 lbs

## MOBILE MANUAL GREASE PUMPS POWERED BY LEVER

Practical and functional; can be used in work environments such as disconnected land meaning agricultural or construction sites. It grants you an easy substitution for the grease container (drum or bucket) and permits quick greasing on all vehicles or mechanisms.

## MOBILE MANUAL PUMPS FOR GREASE TRANSFER POWERED BY LEVER

Each cycles of the lever supplies 1.4 Oz of grease. Practical and functional; can be used for the filling of digital unit dispensers, and syringe for the manual greasing. It grants you the easy substitution for the grease container (drum or bucket).

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities



SUITABLE FOR :



**150150**

### MANUAL GREASE PUMP FOR 120 LBS DRUM PUMP ONLY

SKU	150150
PUMP TYPE	Lubrication
FREE FLOW RATE (87 PSI)	2.2 oz per 10 cycles
OUTLET	1/4" NPT(m)
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	12 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities



SUITABLE FOR :



**150250**

### MANUAL TRANSFER GREASE PUMP FOR 120 LBS DRUM

SKU	150250
PUMP TYPE	Transfer
FREE FLOW RATE (87 PSI)	14 oz per 10 cycles
OUTLET	1/4" NPT(m)
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	12 lbs



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



**150607**



SUITABLE FOR:



<b>GREASE KIT - MANUAL PUMP - FOR 120 LBS DRUM COMPLETE + 4 WHEELS TROLLEY</b>	
SKU	150607
PUMP	150150 - Manual Pump
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling 7.87 in
TROLLEY	260030 - Four-wheel Trolley
WEIGHT	51 lbs

**Typical Applications**

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**150614**



SUITABLE FOR:



<b>GREASE KIT - MANUAL TRANSFER PUMP - FOR 120 LBS DRUM WITH 90° CONNECTION + 4 WHEELS TROLLEY</b>	
SKU	150614
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	<i>Without Hose</i>
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"
TROLLEY	260030 - Four-wheel Trolley
WEIGHT	49 lbs

**Typical Applications**


- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**150615**



SUITABLE FOR:



<b>GREASE KIT - MANUAL TRANSFER PUMP - FOR 120 LBS DRUM COMPLETE WITH 30° SPOUT + 4 WHEELS TROLLEY</b>	
SKU	150615
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150034 - Hose 1/2" x 6 ft with Valve
QUICK CONNECTOR	150916 (Male) 150917 (Female)
TROLLEY	260030 - Four-wheel Trolley
WEIGHT	51 lbs

**Typical Applications**

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## GREASE KIT - MANUAL PUMP FOR 120 LBS DRUM COMPLETE

SKU	150606
PUMP	150150 - Manual Pump
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling 7.87 in
WEIGHT	51 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## GREASE KIT - MANUAL TRANSFER PUMP FOR 120 LBS DRUM WITH 90° CONNECTION

SKU	150610
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	<i>Without Hose</i>
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"
WEIGHT	49 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## GREASE KIT - MANUAL TRANSFER PUMP FOR 120 LBS DRUM COMPLETE WITH 30° SPOUT

SKU	150611
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150034 - Hose 1/2" x 6 ft with Valve
QUICK CONNECTOR	150916 (Male) 150917 (Female)
WEIGHT	51 lbs

### Typical Applications



- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

GREASE GR

SUITABLE FOR :



120 LBS

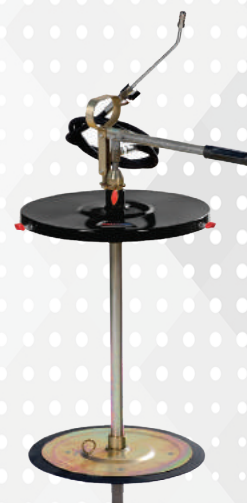

150606

GREASE GR

SUITABLE FOR :



120 LBS




150610

GREASE GR

SUITABLE FOR :



120 LBS



150611

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



**150605**



SUITABLE FOR :



45 TO 60 LBS




**150612**



SUITABLE FOR :



45 TO 60 LBS




**150613**



SUITABLE FOR :



45 TO 60 LBS



**GREASE KIT - MANUAL PUMP - FOR 45 TO 60 LBS DRUM COMPLETE + 2 WHEELS TROLLEY**

SKU	150605
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	250036 - Two-wheel Trolley
WEIGHT	51 lbs

**Typical Applications**

- Automotive dealerships
- Heavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops

**GREASE KIT - MANUAL PUMP - FOR 45 TO 60 LBS DRUM WITH 90° CONNECTION AND 2 WHEELS TROLLEY**

SKU	150612
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"
TROLLEY	250036 - Two-wheel Trolley
WEIGHT	51 lbs

**Typical Applications**

- Automotive dealerships
- Heavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops

**GREASE KIT - MANUAL TRANSFER PUMP - FOR 45 TO 60 LBS DRUM COMPLETE AND TROLLEY**

SKU	150613
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	250036 - Two-wheel Trolley
WEIGHT	51 lbs

**Typical Applications**

- Automotive dealerships
- Heavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops

## GREASE KIT - MANUAL PUMP FOR 45 TO 60 LBS DRUM COMPLETE

SKU	150604
PUMP	150150 - Manual Pump
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
WEIGHT	15 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## GREASE KIT - MANUAL TRANSFER PUMP FOR 45 TO 60 LBS DRUM WITH 90° CONNECTION

SKU	150608
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	<i>Without Hose</i>
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"
WEIGHT	49 lbs

### Typical Applications


- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## GREASE KIT - MANUAL TRANSFER PUMP FOR 45 TO 60 LBS DRUM COMPLETE WITH 30° SPOUT


SKU	150609
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150034 - Hose 1/2" x 6 ft with Valve
QUICK CONNECTOR	150916 (Male) 150917 (Female)
WEIGHT	51 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

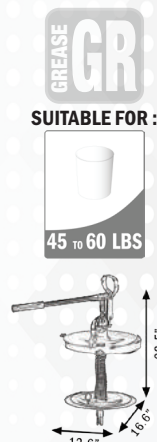

**150604**

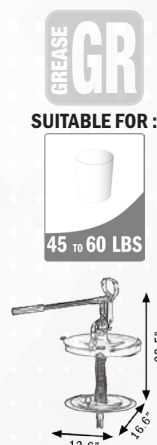

**150608**



**150609**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES




**150603**



SUITABLE FOR :



35 LBS



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

### GREASE KIT - MANUAL PUMP FOR 35 LBS DRUM COMPLETE

SKU	150603
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	150502 - Drum Cover Ø 11.02"
FOLLOWER PLATE	151002 - Follower Plate Ø 10.43"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
WEIGHT	14 lbs



**150601**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities


### FOOT OPERATED GREASE PUMP WITH 35 LBS CAPACITY BUCKET

SKU	150601
FREE FLOW RATE	2.2 oz per 10 cycles
OUTLET PRESSURE	5,800 PSI
SPOUT	150028 - Rigid with 4-jaw Coupling
HOSE	150003 - R2 hose 6 ft x 1/4"
WHEELS	Yes
WEIGHT	37 lbs



## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



### MANUAL GREASE PUMP - WHEELED AND WITH BUCKET 35 LBS BUCKET CAPACITY

SKU	150602
FREE FLOW RATE	2.2 oz per 10 cycles
HOSE	150003 - R2 hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
OUTLET PRESSURE	5,800 PSI
WHEELS	Yes
WEIGHT	29 lbs



**150602**

## Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Fleet service facilities



### MANUAL GREASE PUMP - WITH BUCKET 35 LBS BUCKET CAPACITY

SKU	152401
FREE FLOW RATE	2.2 oz per 10 cycles
HOSE	150003 - R2 hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
OUTLET PRESSURE	5,800 PSI
WHEELS	No
WEIGHT	28 lbs



**152401**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES


NOZZLES / GUNS

ACCESSORIES



**102304**

GREASE **GR**



### MANUAL GREASE PUMP - WITH BUCKET 15 LBS BUCKET CAPACITY

SKU	102304
FREE FLOW RATE	2.2 oz per 10 cycles
MATERIAL	Steel
BUCKET CAPACITY	15 Lbs
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	No
WEIGHT	11 lbs


#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**102305**

GREASE **GR**



### MANUAL GREASE PUMP - WITH BUCKET 30 LBS BUCKET CAPACITY

SKU	102305
FREE FLOW RATE	2.2 oz per 10 cycles
MATERIAL	Steel
BUCKET CAPACITY	30 Lbs
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	No
WEIGHT	14 lbs


#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**102306**

GREASE **GR**



### MANUAL GREASE PUMP - WITH BUCKET AND TROLLEY 30 LBS BUCKET CAPACITY

SKU	102306
FREE FLOW RATE	2.2 oz per 10 cycles
MATERIAL	Steel
BUCKET CAPACITY	30 Lbs
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	Yes
WEIGHT	18 lbs

#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



## SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.


## SELECTING HOSE REELS

The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.

## SIZES AND CAPACITY


<b>MODEL F400</b>	Up to 30ft 3/8" or Up to 50ft 1/4"
<b>MODEL F460</b>	Up to 50ft 3/8" or Up to 60ft 1/4"
<b>MODEL F550</b>	Up to 80ft 3/8"
<b>MODEL F555</b>	Up to 100ft 3/8"

## HOSE REEL INSTALLATIONS

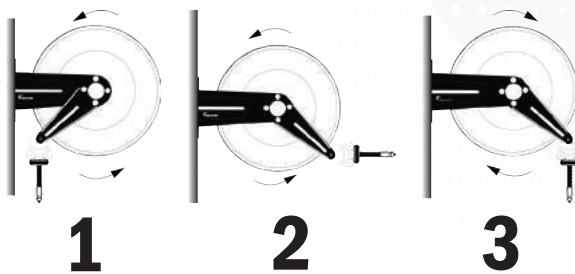


### WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 2 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.

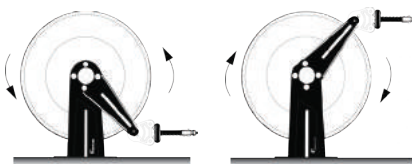

### BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.



### CEILING

Ceiling installations are the same as the wall mounted 2 set up.



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES




## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **8700 PSI**

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 2SC hose and zinc plated steel fittings NPT(f) x NPT(m).



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
150716	F400	1/4" NPT(m)	1/4" NPT(m)	Without hose	-	35 lbs
150717	F400	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	35 lbs
153601	F400	1/4" NPT(m)	1/4" NPT(m)	30 ft	1/4"	46 lbs
150702	F400	1/4" NPT(m)	1/4" NPT(m)	50 ft	1/4"	56 lbs
150703	F400	3/8" NPT(m)	1/4" NPT(m)	30 ft	3/8"	50 lbs
151022	F460	1/4" NPT(m)	1/4" NPT(m)	Without hose	-	47 lbs
151023	F460	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	47 lbs
150704	F460	1/4" NPT(m)	1/4" NPT(m)	60 ft	1/4"	51 lbs
153602	F460	3/8" NPT(m)	1/4" NPT(m)	50 ft	3/8"	65 lbs

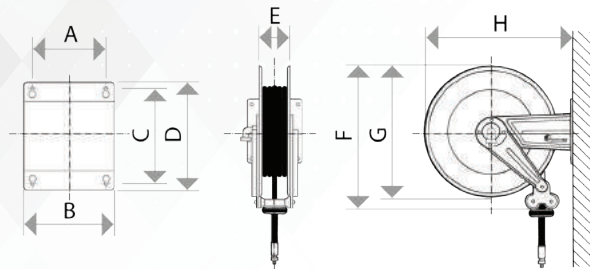

MODEL	A	B	C	D	E	F	G	H
F400	6.2"	4.7"	6.6"	7.6"	3.8"	17.7"	15.8"	17.1"
F460	6.2"	4.7"	6.6"	7.6"	3.8"	18.9"	18.1"	19.7"

## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **8700 PSI**

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 2SC hose and zinc plated steel fittings NPT(f) x NPT(m).

GREASE GR



PUMPS

KITS

MANUAL PUMPS


HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
151024	F550	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	53 lbs
150706	F550	3/8" NPT(m)	1/4" NPT(m)	60 ft	3/8"	94 lbs
150707	F550	3/8" NPT(m)	1/4" NPT(m)	80 ft	3/8"	109 lbs
151025	F555	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	62 lbs
150708	F555	3/8" NPT(m)	1/4" NPT(m)	100 ft	3/8"	132 lbs

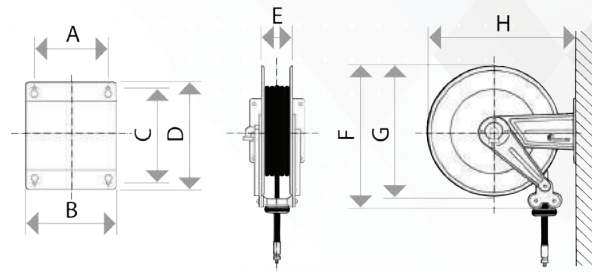

MODEL	A	B	C	D	E	F	G	H
F550	7.9"	5.9"	8.9"	10.6"	4.7"	23.3"	21.7"	23.6"
F555	9.9"	7.9"	8.9"	10.6"	6.7"	23.3"	21.7"	23.6"

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES






## FEATURES:

- WALL BRACKET ADJUSTABLE IN 3 DIFFERENT POSITIONS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **8700 PSI**

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 2SC hose and zinc plated steel fittings NPT(f) x NPT(m).



PART#	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
150712	CF500	1/4" NPT(m)	1/4" NPT(m)	Without hose	-	51 lbs
150713	CF500	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	51 lbs
150711	CF500	1/4" NPT(m)	1/4" NPT(m)	60 ft	1/4"	87 lbs
150709	CF500	1/4" NPT(m)	1/4" NPT(m)	30 ft	1/4"	69 lbs
150710	CF500	1/4" NPT(m)	1/4" NPT(m)	50 ft	1/4"	81 lbs
150714	CF500	3/8" NPT(m)	3/8" NPT(m)	30 ft	3/8"	74 lbs
150715	CF500	3/8" NPT(m)	3/8" NPT(m)	50 ft	3/8"	88 lbs

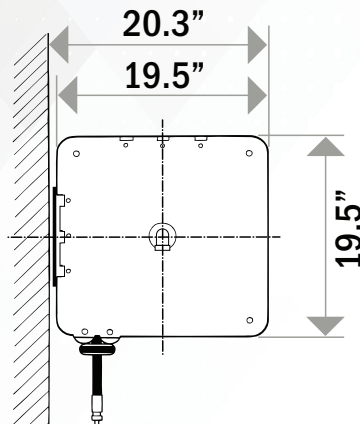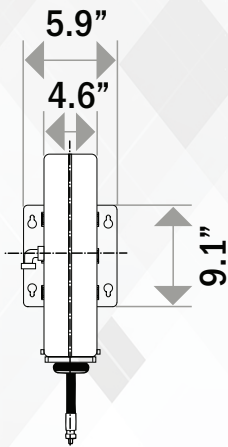

## FEATURES:

- SYNTHETIC RUBBER HOSE 2SC/R2.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/8" THREAD FOR 1/4" HOSE
  - 1/4" THREAD FOR 3/8" HOSE
  - 3/8" THREAD FOR 1/4" HOSE



### Approximately Weight per Foot

1/4"	3/8"
+/- 3.3 oz	+/- 4.9 oz

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
150801	1/4"	5,800 PSI	11,600 PSI	30 ft	NPT(m) 1/4" x NPT(f) 1/4"
150821	1/4"	5,800 PSI	11,600 PSI	30 ft	NPT(m) 1/4" x NPT(f) 3/8"
150802	1/4"	5,800 PSI	11,600 PSI	50 ft	NPT(m) 1/4" x NPT(f) 1/4"
150822	1/4"	5,800 PSI	11,600 PSI	50 ft	NPT(m) 1/4" x NPT(f) 3/8"
150803	1/4"	5,800 PSI	11,600 PSI	60 ft	NPT(m) 1/4" x NPT(f) 1/4"
150823	1/4"	5,800 PSI	11,600 PSI	60 ft	NPT(m) 1/4" x NPT(f) 3/8"
150804	3/8"	2,610 PSI	10,440 PSI	30 ft	NPT(m) 3/8" x NPT(f) 3/8"
150805	3/8"	2,610 PSI	10,440 PSI	50 ft	NPT(m) 3/8" x NPT(f) 3/8"
150806	3/8"	2,610 PSI	10,440 PSI	65 ft	NPT(m) 3/8" x NPT(f) 3/8"
150807	3/8"	2,610 PSI	10,440 PSI	80 ft	NPT(m) 3/8" x NPT(f) 3/8"
150808	3/8"	2,610 PSI	10,440 PSI	100 ft	NPT(m) 3/8" x NPT(f) 3/8"

## CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
150907	1/4"	5,800 PSI	11,600 PSI	5 ft	NPT(m) 1/4" x NPT(f) 1/4"
150901	1/4"	5,800 PSI	11,600 PSI	10 ft	NPT(m) 1/4" x NPT(f) 1/4"
150903	1/4"	5,800 PSI	11,600 PSI	15 ft	NPT(m) 1/4" x NPT(f) 1/4"
150904	1/4"	5,800 PSI	11,600 PSI	20 ft	NPT(m) 1/4" x NPT(f) 1/4"
150913	3/8"	2,610 PSI	10,440 PSI	5 ft	NPT(m) 3/8" x NPT(f) 3/8"
150909	3/8"	2,610 PSI	10,440 PSI	10 ft	NPT(m) 3/8" x NPT(f) 3/8"
150911	3/8"	2,610 PSI	10,440 PSI	15 ft	NPT(m) 3/8" x NPT(f) 3/8"

## CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
150003	1/4"	5,800 PSI	11,600 PSI	6 ft	NPT(f) 1/4" x NPT(f) 1/4"
150925	1/4"	5,800 PSI	11,600 PSI	12 ft	NPT(f) 1/4" x NPT(f) 1/4"
150936	3/8"	2,610 PSI	10,440 PSI	6 ft	NPT(f) 3/8" x NPT(f) 3/8"
150939	3/8"	2,610 PSI	10,440 PSI	12 ft	NPT(f) 3/8" x NPT(f) 3/8"

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



**101201**



**101301**



**101401**



**101601**

## MANUAL GREASE GUN - MINI PISTOL 3,000 PSI W.P - 3 OZ CAPACITY

SKU	101201
FREE FLOW RATE	0.6 oz per 40 strokes
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	3 oz
WORKING PRESSURE	3,000 PSI
SPOUT	4" Steel with 4-jaw Coupling
WEIGHT	1 lbs

### Typical Applications

- Automotive dealerships
- Fleet service facilities
- Farm/Agriculture
- Service shops
- Fast lube centers

## MANUAL GREASE GUN - PUSH TYPE 1,000 PSI W.P - 4 OZ CAPACITY

SKU	101301
FREE FLOW RATE	1 oz per 32 strokes
MATERIAL	Steel
TUBE CAPACITY	4 oz
WORKING PRESSURE	1,000 PSI
SPOUT	3" Steel with Universal Coupling
WEIGHT	1 lbs

### Typical Applications

- Automotive dealerships
- Fleet service facilities
- Farm/Agriculture
- Service shops
- Fast lube centers

## MANUAL GREASEGUN - LEVER ACTION STANDARD 6,000 PSI W.P - 16 OZ CAPACITY

SKU	101401
FREE FLOW RATE	1 oz per 28 strokes
MATERIAL	Steel
TUBE CAPACITY	14 oz Cartridge or 16 oz Bulk Fill
WORKING PRESSURE	6,000 PSI
SPOUT	6" Steel with 4-jaw Coupling
WEIGHT	4 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops

## MANUAL GREASE GUN - PISTOL GRIP 5,000 PSI W.P - 16 OZ CAPACITY

SKU	101601
FREE FLOW RATE	0.7 oz per 40 strokes
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz Cartridge or 16 oz Bulk Fill
WORKING PRESSURE	5,000 PSI
SPOUT	12" Flexible with 4-jaw Coupling
WEIGHT	3 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops

## MANUAL GREASE GUN - LEVER ACTION - HEAVY DUTY 10,000 PSI W.P - 14 OZ CAPACITY

SKU	101701
FREE FLOW RATE	1 oz per 28 strokes
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz
WORKING PRESSURE	10,000 PSI
SPOUT	12" Flexible with 4-jaw Coupling
WEIGHT	4 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## AIR-OPERATED GREASE GUN - 40:1 4,800 PSI W.P - 14 OZ CAPACITY

SKU	101801
FREE FLOW RATE	Up to 14 oz per minute
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz
WORKING PRESSURE	4,800 PSI
RATIO	40:1
AIR CONSUMPTION	1 CFM
AIR INLET	1/4"
AIR WORK. PRESSURE (RANGE)	40 PSI to 120 PSI
SPOUT	3" Steel with Universal Coupling
WEIGHT	3 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## AIR-OPERATED GREASE GUN - HIGH POWER 50:1 - 6,000 PSI W.P - 14 OZ CAPACITY

SKU	101901
FREE FLOW RATE	1 oz per 40 strokes
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz Cartridge or 16 oz Bulk Fill
WORKING PRESSURE	6,000 PSI
RATIO	50:1
AIR CONSUMPTION	1 CFM
AIR INLET	1/4"
AIR WORK. PRESSURE (RANGE)	40 PSI to 120 PSI
SPOUT	9" Steel with Universal Coupling
WEIGHT	5 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



101701



101801



100901

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



**100801**



**PROFESSIONAL GREASE CONTROL VALVE WITH Z SWIVEL 7,500 PSI W.P - RIGID SPOUT**

SKU	100801
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	7,500 PSI
SPOUT	6" Steel with 4-jaw Coupling
WEIGHT	3 lbs

**Typical Applications**

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**100850**



**PROFESSIONAL GREASE CONTROL VALVE - WITH Z SWIVEL 7,500 PSI W.P - FLEXIBLE SPOUT**

SKU	100850
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	7,500 PSI
SPOUT	12" Flexible with 4-jaw Coupling
WEIGHT	3 lbs

**Typical Applications**

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**100899**



**PROFESSIONAL GREASE CONTROL VALVE - WITH Z SWIVEL AND HAND PROTECTOR**

SKU	100899
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	7,500 PSI
SPOUT	6" Steel and 12" Flexible with 4-jaw Coupling
HAND PROTECTOR	100005 - Grease Control Valve Protection
WEIGHT	3 lbs

**Typical Applications**

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Mining



\* BOTH (RIGID AND FLEXIBLE) SPOUT INCLUDED.

Heavy Duty Grease control valve with a built-in pressure boost mechanism. Provides continuous flow with pistol handle fully pressed and pressure boost achieved through repeated actuation of the pistol handle. Boosts line pressure from 6,000 PSI to 10,000 PSI, extremely useful in unblocking frozen grease fittings.

Heavy Duty steel construction, provides durability & longevity, has an ergonomically designed pistol handle and outfitted with 360° Z Swivel.

## PREMIUM GREASE CONTROL VALVE - WITH Z SWIVEL 10,000 PSI W.P - RIGID SPOUT


SKU	100901
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	10,000 PSI
SPOUT	6" Steel with 4-jaw Coupling
WEIGHT	3 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Mining



GREASE GR

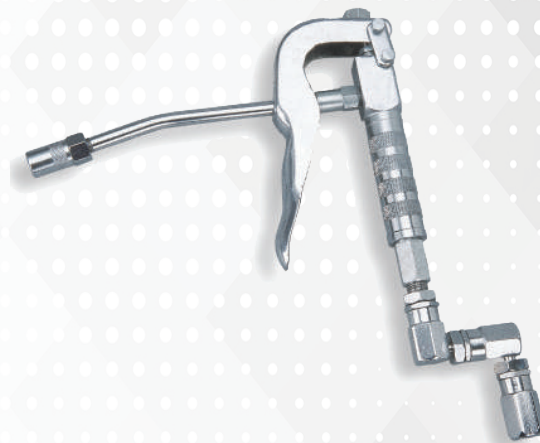

100901

## DIGITAL GREASE NOZZLE - WITH Z SWIVEL 7,250 PSI W.P - RIGID SPOUT

SKU	151026
FREE FLOW RATE	Up to 5.5 lbs/min
MATERIAL	Aluminum and Steel
INLET THREAD	1/4" NPT(f)
MAX. WORKING PRESSURE	7,250 PSI
BURST PRESSURE	14,500 PSI
MEASURING SYSTEM	Oval Gear
MAX. WORKING TEMPERATURE	140° F
DISPLAY	4 Digits
SPOUT	6" Steel with 4-jaw Coupling
BATTERY	Standard AAA
WEIGHT	4 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Mining



GREASE GR



151026

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES





GREASE **GR** OIL **O**



Introducing our fixed cabinets that offer an independent, cleaner and safer working station in any environment (factories, repair shops, quick lubes etc) allowing a better fluid handling without wastes. The cabinets can be connected to a centralized distribution system, adding extras lube points. Available in 4 different sizes, the cabinets can hold up to 6 hose reels model F555.

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Mining
- Service shops



### CABINET FOR HOSE REELS SUITABLE FOR UP TO 9 HOSE REELS


SKU	150007	150008	130004	130006
<b>MATERIAL</b>	Steel	Steel	Steel	Steel
<b>REELS CAPACITY - F400 / F460</b>	4 Reels	6 Reels	6 Reels	9 Reels
<b>REELS CAPACITY - F520</b>	3 Reels	4 Reels	5 Reels	7 Reels
<b>REELS CAPACITY - F555</b>	2 Reels	3 Reels	4 Reels	6 Reels
<b>DIMENSIONS</b>	43.9" x 19.7" x 98.5"	61.1" x 19.7" x 98.5"	65.0" x 23.6" x 100.4"	91.0" x 23.6" x 101.0"
<b>WEIGHT</b>	424 lbs	475 lbs	700 lbs	775 lbs

## FRONT END REEL BRACKET

SKU	130100	130200
MATERIAL	Steel	Steel
REELS CAPACITY - F400 / F460	1 Reel	2 Reels
REELS CAPACITY - F550	1 Reel	2 Reels
REELS CAPACITY - F555	(Not applicable)	(Not applicable)
DIMENSIONS	18" x 14" x 95"	23.3" x 14" x 95"
WEIGHT	120 lbs	139 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Mining



**130100**




**130200**

## FRONT END REEL BRACKET

SKU	130300	130400
MATERIAL	Steel	Steel
REELS CAPACITY - F400 / F460	3 Reels	4 Reels
REELS CAPACITY - F550	3 Reels	4 Reels
REELS CAPACITY - F555	(Not applicable)	(Not applicable)
DIMENSIONS	34" x 14" x 95"	43.8" x 14" x 95"
WEIGHT	146 lbs	155 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Mining



**130300**



**130400**

Fixed supports that offer an independent working station. They allow an optimal placing in every working environment (factories and repair shops) allowing to operate in a clean and safe way and without wasting of lubricant oils for different uses.

PUMPS

KITS


MANUAL PUMPS

HOSE REELS


HOSES

NOZZLES / GUNS


ACCESSORIES




**150009**




**150010**

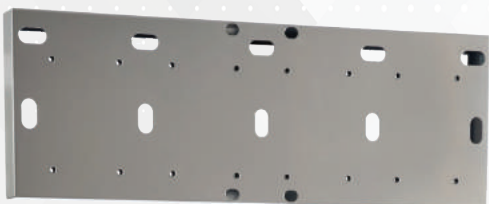

**150011**



**150012**



## WALL BRACKET - FOR HOSE REELS UP TO 2 REELS

SKU 150009

MATERIAL Steel

CAPACITY - F400/F460 MODEL 2 Reels

CAPACITY - F550 MODEL 2 Reels

CAPACITY - F555 MODEL (Not applicable to F555 model)

DIMENSIONS 23.3 x 15.4 x 2.6

WEIGHT 20 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## WALL BRACKET - FOR HOSE REELS UP TO 3 REELS

SKU 150010

MATERIAL Steel

CAPACITY - F400/F460 MODEL 3 Reels

CAPACITY - F550 MODEL 3 Reels

CAPACITY - F555 MODEL (Not applicable to F555 model)

DIMENSIONS 34.0 x 15.4 x 2.6

WEIGHT 27 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## WALL BRACKET - FOR HOSE REELS UP TO 4 REELS

SKU 150011

MATERIAL Steel

CAPACITY - F400/F460 MODEL 4 Reels

CAPACITY - F550 MODEL 4 Reels

CAPACITY - F555 MODEL (Not applicable to F555 model)

DIMENSIONS 43.8 x 15.4 x 2.6

WEIGHT 34 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## WALL BRACKET FOR CLOSED HOSE REELS

SKU 150012

MATERIAL Steel

CAPACITY - F400/F460 MODEL (Not applicable to this model)

CAPACITY - F550 MODEL (Not applicable to this model)

CAPACITY - F555 MODEL (Not applicable to this model)

CAPACITY - CF500 MODEL 1 Reel

WEIGHT 5 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops

## SWIVELLING WALL BRACKET FOR HOSE REELS F400 AND F460 MODEL

SKU 150013

MATERIAL Steel

CAPACITY - F400/F460 MODEL 1 Reel

CAPACITY - F550 MODEL *(Not applicable to this model)*


CAPACITY - F555 MODEL *(Not applicable to this model)*

DIMENSIONS 7.7" x 5.9"

WEIGHT 3 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**150013**

## SWIVELLING WALL BRACKET FOR HOSE REELS F550 MODEL

SKU 150014

MATERIAL Steel

CAPACITY - F400/F460 MODEL *(Not applicable to this model)*

CAPACITY - F550 MODEL 1 Reel


CAPACITY - F555 MODEL *(Not applicable to this model)*

DIMENSIONS 10.1" x 7.9"

WEIGHT 4 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**150014**

## SWIVELLING WALL BRACKET FOR HOSE REELS F555 MODEL

SKU 150015

MATERIAL Steel

CAPACITY - F400/F460 MODEL *(Not applicable to this model)*

CAPACITY - F550 MODEL *(Not applicable to this model)*


CAPACITY - F555 MODEL 1 Reel

DIMENSIONS 10.1" x 9.9"

WEIGHT 4 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
- Fleet service facilities
- Service shops



**150015**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS


MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

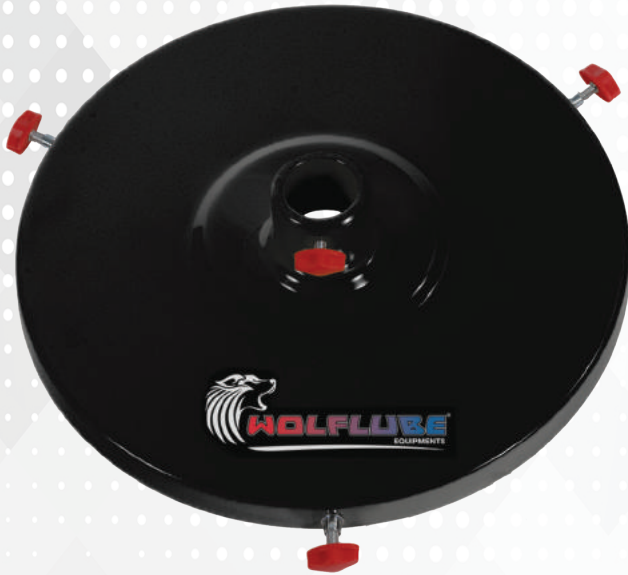


## FEATURES:

- POWDER COATED PAINT
- ADJUSTABLE SIZE
- LID LOCKERS INCLUDED

Suitable for the application of the threaded ring fixing pumps.

The drum lid is available in different diameters from 11 to 400 lbs.

A handle provides an easy grip to the drum. It keeps the pump in vertical position in order to assure perfect working.



### LIDS / COVER LOCKER


*Also available/sold separately.*

## 150599

SKU	LID / COVER Ø	DRUM SIZE	MIN. INSIDE Ø	MAX. INSIDE Ø	SHANK Ø	WEIGHT
150501	8.86"	11 lbs	7.87"	8.86"	1.18"	1.0 lb
150502	11.02"	26 to 35 lbs	9.45"	11.02"	1.18"	1.2 lbs
* 153802	12.60"	35 to 66 lbs	10.24"	12.60"	1.18"	1.5 lbs
150504	13.78"	44 to 66 lbs	11.81"	13.78"	1.18"	1.7 lbs
* 150505	15.55"	120 lbs	13.39"	15.55"	1.18"	2.1 lbs
150509	16.54"	120 to 132 lbs	14.57"	16.54"	1.18"	2.3 lbs
* 153803	23.62"	400 lbs	21.65"	23.62"	1.18"	4.1 lbs
<b>LIDS / COVERS FOR INDUSTRIAL PUMPS</b>						
* 150506	15.55"	120 lbs	13.39"	15.55"	1.77"	2.2 lbs
150510	16.54"	120 to 132 lbs	14.57"	16.54"	1.77"	2.1 lbs
* 153801	23.62"	400 lbs	21.65"	23.62"	1.77"	4.1 lbs
* 150507	15.55"	120 lbs	13.39"	15.55"	1.97"	2.2 lbs
150511	16.54"	120 to 132 lbs	14.57"	16.54"	1.97"	2.1 lbs
* 150515	23.62"	400 lbs	21.65"	23.62"	1.97"	4.0 lbs
* 150508	15.55"	120 lbs	13.39"	15.55"	2"	2.2 lbs
150512	16.54"	120 to 132 lbs	14.57"	16.54"	2"	2.1 lbs
* 150516	23.62"	400 lbs	21.65"	23.62"	2"	4.0 lbs

\*  **STANDARD SIZE FOR USA AND CANADA**

We recommend to always use the follower plate; it is very important that the ambient temperature is low when high viscosity grease is used. Due to the depression created by the pump, the plate is attracted towards the bottom of the drum by atmospheric pressure. It is pushing the grease into the pump and avoids air cavities. Also, it removes the grease remaining on the walls down to the bottom of the drums.

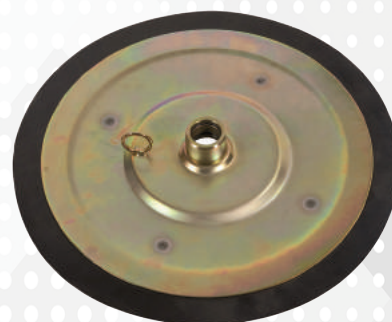

SKU	FOLLOWER PLATE Ø	DRUM SIZE	MIN. DRUM Ø	MAX. DRUM Ø	SHANK Ø	WEIGHT
<b>151001</b>	8.86"	11 lbs	7.68"	8.27"	1.18"	9 oz
<b>151002</b>	10.43"	26 to 35 lbs	9.45"	10.24"	1.18"	1.2 lbs
<b>151003</b>	11.42"	35 to 44 lbs	9.84"	11.02"	1.18"	1.4 lbs
* <b>151004</b>	12.20"	40 to 66 lbs	10.63"	11.81"	1.18"	1.5 lbs
<b>151005</b>	13.39"	44 to 66 lbs	11.81"	12.99"	1.18"	1.5 lbs
* <b>151006</b>	14.57"	120 lbs	13.19"	14.17"	1.18"	1.5 lbs
<b>151009</b>	15.75"	120 to 132 lbs	14.17"	15.75"	1.18"	2.5 lbs
* <b>151012</b>	23.23"	400 lbs	21.26"	22.84"	1.18"	10 lbs

#### FOLLOWER PLATE FOR INDUSTRIAL PUMPS

* <b>151007</b>	14.57"	120 lbs	13.19"	14.17"	1.77"	2.4 lbs
<b>151010</b>	15.75"	120 to 132 lbs	14.17"	15.75"	1.77"	2.5 lbs
* <b>151013</b>	23.23"	400 lbs	21.26"	22.84"	1.77"	9 lbs
* <b>151008</b>	14.57"	120 lbs	13.19"	14.17"	1.97"	2.5 lbs
<b>151011</b>	15.75"	120 to 132 lbs	14.17"	15.75"	1.97"	1.7 lbs
* <b>151014</b>	23.23"	400 lbs	21.26"	22.84"	1.97"	9 lbs

Caution: Above recommendations may not work with all containers of similar capacity. Due to the difference in lube container specifications from one company to another, there can be a difference in your container size.

Above recommendations are based on most widely used container specifications worldwide. Ensure that your lube container falls within the above specified follower plate dimensions.



* <b>103701</b>	11.34"	35 lbs	9.70"	11.14"	1.18"	8 oz
* <b>103702</b>	14.96"	120 lbs	12.77"	14.66"	1.18"	1 lb
* <b>103703</b>	23.70"	400 lbs	21.75"	23.15"	1.18"	3.3 lbs

\* **STANDARD SIZE FOR USA AND CANADA**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



**100001**



**100002**



**100005**



**101001**



**101002**

### SWIVEL CONNECTION - Z STYLE

SKU	100001
MATERIAL	Steel
INLET	1/4" NPT(f)
OUTLET	1/4" NPT(m)
MAX. WORKING PRESSURE	12,000 PSI
WEIGHT	9 oz

### SWIVEL CONNECTION - Z STYLE

SKU	100002
MATERIAL	Steel
INLET	1/4" NPT(f)
OUTLET	1/4" NPT(m)
MAX. WORKING PRESSURE	7,500 PSI
WEIGHT	9 oz

### GREASE CONTROL VALVE PROTECTION

SKU	100005
MATERIAL	Steel
WEIGHT	3 oz



\* CONTROL VALVE NO INCLUDED.

### EXTENTION PIPE FOR GREASE CONTROL VALVE

SKU	101001
MATERIAL	Steel
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
LENGTH	6"
MAX. WORKING PRESSURE	7,500 PSI
WEIGHT	2 oz

### EXTENTION PIPE FOR GREASE CONTROL VALVE

SKU	101002
MATERIAL	Steel
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
LENGTH	18"
MAX. WORKING PRESSURE	7,500 PSI
WEIGHT	5 oz

### HOSE EXTENTION FOR GREASE NOZZLES/GUNS


SKU	101101
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
WORKING PRESSURE	5,800 PSI
BUSTING PRESSURE	13,775 PSI
LENGTH	12"
WEIGHT	2 oz



**101101**

### HOSE EXTENTION FOR GREASE NOZZLES/GUNS


SKU	101102
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
WORKING PRESSURE	5,800 PSI
BUSTING PRESSURE	13,775 PSI
LENGTH	18"
WEIGHT	3 oz

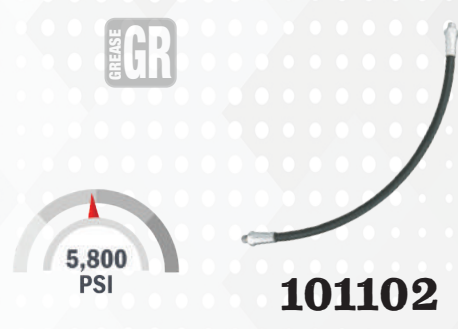

**101102**

### HOSE EXTENTION FOR GREASE NOZZLES/GUNS

SKU	101103
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
WORKING PRESSURE	5,800 PSI
BUSTING PRESSURE	13,775 PSI
LENGTH	20"
WEIGHT	3 oz

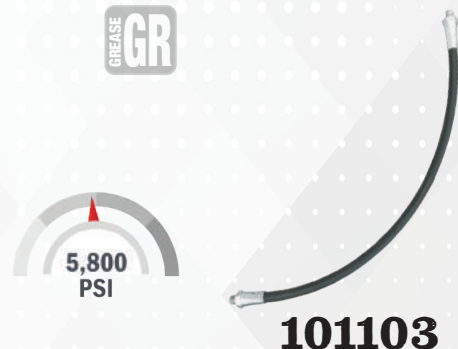

**101103**

### UNBLOCKER FOR GREASE FITTINGS

SKU	100201
MATERIAL	Steel
	01 - Professional Recessed Lube Adaptor
	01 - Grease Injector Needle
	01 - Professional 90° Angle Lube Adaptador
	01 - Professional Narrow Needle Nose Adaptor
	01 - Jaw type Coupler to Seal off Dispenser
	01 - Regular Coupler to Right Coupler
	01 - Quick Connect Hose
WEIGHT	4 lbs



**100201**

### UNBLOCKER FOR GREASE FITTINGS

SKU	100501
MATERIAL	Steel
WEIGHT	1 lb



**100501**

### Product Brief

Opens clogged grease fittings and loosens hardened grease joints. Excellent for maintaining and protecting bearings, control arms, joints, king pins, etc. This tool has an all steel construction and is designed to be tapped with a hammer to force a light viscosity oil through the tool into the coupler & finally into the grease joint, breaking up and removing dirt and debris. Built-In Hand Guard for added safety in use. Flexible hose attachment reaches fittings in difficult areas.



PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

GREASE GR



**100601**

GREASE GR



**100602**

GREASE GR



**100603**

GREASE GR



**100604**

GREASE GR



**100605**

GREASE GR



**102101**

GREASE GR



**100701**

### STANDARD HYDRAULIC COUPLER WITH BALL CHECK

SKU	100601
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	3,000 PSI
JAWS	4 Jaws

\* Sold in pack with 10 couplers/fittings.

### PROFESSIONAL HYDRAULIC COUPLER WITH BALL CHECK

SKU	100602
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	6,000 PSI
JAWS	3 Jaws

\* Sold in pack with 10 couplers/fittings.

### HEAVY DUTY HYDRAULIC COUPLER WITH BALL CHECK

SKU	100603
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	10,000 PSI
JAWS	4 Jaws

\* Sold in pack with 10 couplers/fittings.

### HEAVY DUTY HYDRAULIC COUPLER WITH BALL CHECK

SKU	100604
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	10,000 PSI
JAWS	3 Jaws

\* Sold in pack with 10 couplers/fittings.

### HYDRAULIC COUPLER - 360° - WITH BALL CHECK

SKU	100605
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	7,000 PSI
JAWS	3 Jaws

### BULK LOADER / FILLER NIPPLE FOR GREASE GUNS

SKU	102101
MATERIAL	Steel
INLET	1/8" BSP(m)
MAX. WORKING PRESSURE	3,000 PSI

### BUTTON HEAD COUPLER

SKU	100701
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	3,000 PSI
BUTTON HEAD FITTING	5/8"

### BUTTON HEAD COUPLER - GIANT

SKU	100702
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	7,500 PSI
BUTTON HEAD FITTING	7/8"



**100702**

### BUTTON HEAD COUPLER - STANDARD

SKU	100703
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	6,000 PSI
BUTTON HEAD FITTING	5/8"



**100703**

### 4 IN ONE EASY OUT FITTING - SMALL

SKU	100401
MATERIAL	Steel
OPENS FITTINGS WITH HEX SIZE	5/16" and 3/8"
RETHREAD SIZE	1/8"

\* 4 tools in 1 : Rethread, Screw extrator, Install straight fittings and Install angled fittings.



**100401**

### 4 IN ONE EASY OUT FITTING - LARGE

SKU	100402
MATERIAL	Steel
OPENS FITTINGS WITH HEX SIZE	3/8" and 7/16"
RETHREAD SIZE	1/4"

\* 4 tools in 1 : Rethread, Screw extrator, Install straight fittings and Install angled fittings.



**100402**

### GREASE INJECTOR NEEDLE

SKU	102001
MATERIAL	Stainless Steel
LENGTH	1.5"
MAX. WORKING PRESSURE	1,000 PSI

Lubricates in very tight spaces such as universal joints and sealed bearings. Equipped with grease fitting for quick connect operation. Complete with protective plastic holder.



**102001**

### HEAVY DUTY GUN HOLDER

SKU	102201
MATERIAL	Steel


#### Product Brief

Heavy Duty Grease Gun holder, designed specially for use on farm & construction equipment, trailers, tractors & other automobiles in high vibration environments.

Sturdy All Steel construction with a 4 bolt design for easy & secure mounting. Heavy Duty Spring, works with both 14 oz. capacity Grease Guns with a 2-1/4".



\* Grease gun not included.

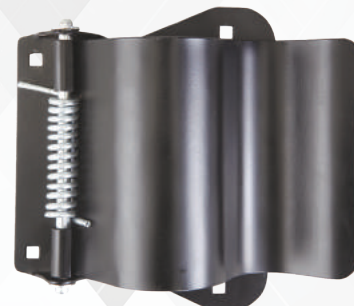

**102201**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS



**150916**



**150917**

KITS



**150005**



**150006**

MANUAL PUMPS

HOSE REELS



**150002**



**151016**

HOSES

NOZZLES / GUNS



**150001**

ACCESSORIES



**100303**



**100302**



**100301**

### QUICK CONNECTION COUPLER - MALE

SKU	150916
MATERIAL	Steel
INLET	1/4" NPT(f)
MAX. WORKING PRESSURE	11,600 PSI

### QUICK CONNECTION COUPLER - FEMALE

SKU	150917
MATERIAL	Steel
INLET	1/4" NPT(f)
MAX. WORKING PRESSURE	11,600 PSI

### SWIVELLING JOINT FOR HOSE REELS

SKU	150005
MATERIAL	Steel
INLET	1/4" NPT(m)
OUTLET	1/4" NPT(m)
MAX. WORKING PRESSURE	8,700 PSI

### SWIVELLING JOINT FOR HOSE REELS

SKU	150006
MATERIAL	Steel
INLET	3/8" NPT(m)
OUTLET	3/8" NPT(m)
MAX. WORKING PRESSURE	8,700 PSI

### 90° RIGID CONNECTION FOR MANUAL PUMP

SKU	150002
MATERIAL	Steel
INLET	1/4" NPT(m)

### HANDLE FOR GREASE KITS

SKU	151016
MATERIAL	Steel

### SAFETY/BALL VALVE

SKU	150001
MATERIAL	Steel
INLET	1/4" NPT(f)
OUTLET	1/8" NPT(m)
MAX. WORKING PRESSURE	5,800 PSI

### COLOR CODE FITTING CAP

SKU	100301	100302	100303
COLOR	Black	Red	Yellow
PACKAGE	Sold in pack with 50 caps		
MATERIAL	Plastic		



\* Fitting not included

### SAE GREASE FITTINGS KIT - BOX WITH 100 PCS

<b>SKU</b>	100101		
<b>MATERIAL</b>	Steel		
<b>Thread Spec.</b>	<b>Straight</b>	<b>45°</b>	<b>90°</b>
1/8"-27 PTF	15	10	10
1/4"-28 SAE-LT	15	10	10
Grease Fitting Caps (Red)	10		
Grease Fitting Caps (Yellow)	10		
Grease Fitting Caps (Black)	10		

### SAE GREASE FITTINGS KIT - BOX WITH 110 PCS

<b>SKU</b>	100102		
<b>MATERIAL</b>	Steel		
<b>Thread Spec.</b>	<b>Straight</b>	<b>45°</b>	<b>90°</b>
1/8"-27 PTF	30	15	15
1/4"-28 SAE-LT	20	15	15

### METRIC GREASE FITTINGS KIT - BOX WITH 110 PCS

<b>SKU</b>	100103		
<b>MATERIAL</b>	Steel		
<b>Thread Spec.</b>	<b>Straight</b>	<b>90°</b>	
M6 x 1	30	20	
M8 x 1	20	10	
M10 x 1	20	10	

### METRIC GREASE FITTINGS KIT - BOX WITH 101 PCS

<b>SKU</b>	100104		
<b>MATERIAL</b>	Steel		
<b>Thread Spec.</b>	<b>Straight</b>	<b>45°</b>	<b>90°</b>
M6 x 1	30	5	10
M8 x 1	14	-	5
M10 x 1	20	5	10
100401			1
100402			1

### SAE GREASE FITTINGS KIT - BOX WITH 80 PCS

<b>SKU</b>	100105		
<b>MATERIAL</b>	Steel		
<b>Thread Spec.</b>	<b>Straight</b>	<b>45°</b>	<b>90°</b>
1/8"-27 PTF	25	10	10
1/4"-28 SAE-LT	15	10	10

### SAE GREASE FITTINGS KIT - BOX WITH 101 PCS

<b>SKU</b>	100106				
<b>MATERIAL</b>	Steel				
<b>Thread Spec.</b>	<b>Straight</b>	<b>35°</b>	<b>45°</b>	<b>65°</b>	<b>90°</b>
1/8"-27 PTF	22	5	10	10	10
1/4"-28 SAE-LT	22	-	10	-	10
100401					1
100402					1

GREASE GR



**100101**

GREASE GR



**100102**

GREASE GR



**100103**

GREASE GR



**100104**

GREASE GR



**100105**

GREASE GR



**100106**

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES

PUMPS

KITS

MANUAL PUMPS

HOSE REELS

HOSES

NOZZLES / GUNS

ACCESSORIES



SKU	MATERIAL	INLET	OUTLET
150017	Galvanized Steel	1/2" NPT(f)	3/8" NPT(m)
150018	Galvanized Steel	1/2" NPT(f)	1/2" NPT(m)
247343	Galvanized Steel	3/4" NPT(f)	1/2" NPT(m)
247344	Galvanized Steel	3/4" NPT(f)	3/4" NPT(m)
247345	Galvanized Steel	3/4" NPT(f)	1" NPT(m)


SKU	MATERIAL	INLET	OUTLET
150021	Stainless Steel	3/8" NPT(m)	3/8" NPT(m)
150022	Stainless Steel	3/8" NPT(m)	1/2" NPT(m)
150023	Stainless Steel	1/2" NPT(m)	1/2" NPT(m)

SKU	MATERIAL	INLET	OUTLET
150032	Plated Steel	3/8" NPT(m)	3/8" NPT(m)
150033	Plated Steel	1/2" NPT(m)	1/4" NPT(m)
150914	Plated Steel	1/4" NPT(m)	1/4" NPT(m)
150915	Plated Steel	3/8" NPT(m)	1/4" NPT(m)

SKU	MATERIAL	INLET	OUTLET
150024	Plated Steel	3/4" NPT(m)	1/2" NPT(m)
150025	Plated Steel	3/4" NPT(m)	3/4" NPT(m)
150026	Plated Steel	1" NPT(m)	3/4" NPT(m)
150027	Plated Steel	1" NPT(m)	1" NPT(m)



# OIL

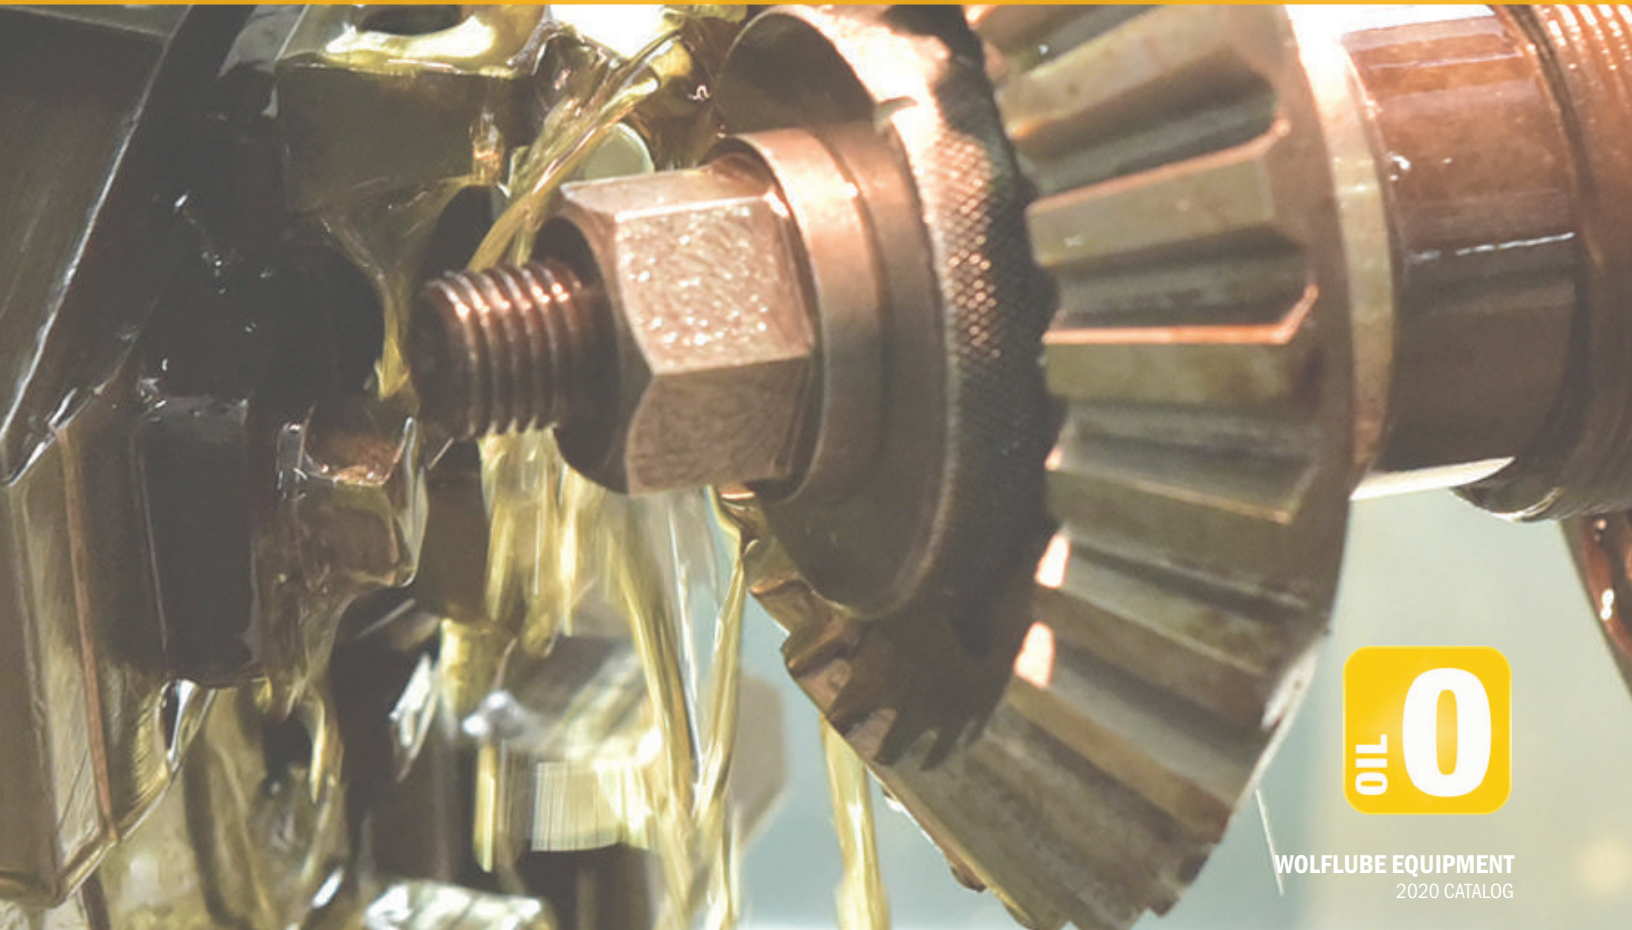

PUMPS

## AIR OPERATED PUMPS

- PAGE 58 - SINGLE ACTING PUMPS
- PAGE 64 - DOUBLE ACTING PUMPS
- PAGE 76 - INDUSTRIAL PUMPS
- PAGE 82 - DIAPHRAGM PUMPS



KITS

## OIL KITS


- PAGE 94 - FRAME LIFTERS
- PAGE 96 - KITS FOR TOTES
- PAGE 99 - KITS FOR 55 GAL DRUMS
- PAGE 105 - KITS FOR 16 GAL DRUMS



HOSE REELS

## HOSE REELS AND HOSES

- PAGE 107 - HOSE REELS - 1/2"
- PAGE 108 - HOSE REELS - 3/4" AND 1"
- PAGE 110 - ENCLOSED HOSE REELS
- PAGE 111 - HOSES FOR REELS
- PAGE 112 - CONNECTION HOSES

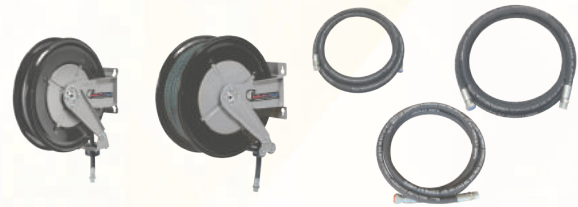

HOSES

## NOZZLES AND METERS

- PAGE 117 - OIL NOZZLES / CONTROL HANDLE
- PAGE 122 - OIL METERS



NOZZLES & METERS

## MANUAL PUMPS AND OIL DRAINERS

- PAGE 123 - MANUAL PUMPS
- PAGE 132 - OIL DRAINERS - AIR OPERATED AND BY GRAVITY
- PAGE 141 - OIL DRAINERS - FOR PITS
- PAGE 142 - OIL DRAINERS - WHEELED UNITS



MANUAL PUMPS

## DISPENSERS AND STORAGE SYSTEMS

- PAGE 144 - DISPENSERS - AIR OPERATED
- PAGE 146 - DISPENSERS - MANUAL SYSTEM
- PAGE 149 - DISPENSERS - WIRELESS SYSTEM
- PAGE 151 - DISPENSER BAR
- PAGE 156 - TANKS
- PAGE 158 - STORAGE SYSTEM



DRAINERS & DISPENSERS

## FILTRATION AND ACCESSORIES

- PAGE 160 - OIL FILTERING UNIT
- PAGE 161 - OIL FILTERING TROLLEY
- PAGE 163 - TROLLEYS
- PAGE 168 - BRACKETS
- PAGE 175 - PLASTIC CONTAINERS AND FUNNELS
- PAGE 184 - BUNG ADAPTERS, DOWN TUBES AND HOSE STOPS
- PAGE 187 - FITTINGS



STORAGE & FILTRATION

ACCESSORIES

## AIR OPERATED OIL PUMPS

The new patented air-operated oil pumps are fully designed and manufactured by WOLFLUBE, which show remarkable operating features. It is fully assembled with electronic machine tools, and the parts have been made with great care that has been carefully tested to assure reliability and long life of the product. The choice of materials and manufacturing quality make this pump suitable to work in the worst environmental conditions.

- Brand new motion reverse device completely air operated, without cams.
- Reduced number of worn parts.
- High amount of delivered oil with low air requirement.
- High operating pressure.
- Aluminum alloy body pump with electrolytic treatment that ensures very high corrosion strength.
- High stressed elements in Fe 420 steel.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES







## AIR OPERATED OIL PUMP 1:1 - STUB (WALL MOUNTING) FREE FLOW RATE 9.3 GPM

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Oil Transfer
- Farm/Agriculture



### SUITABLE FOR :

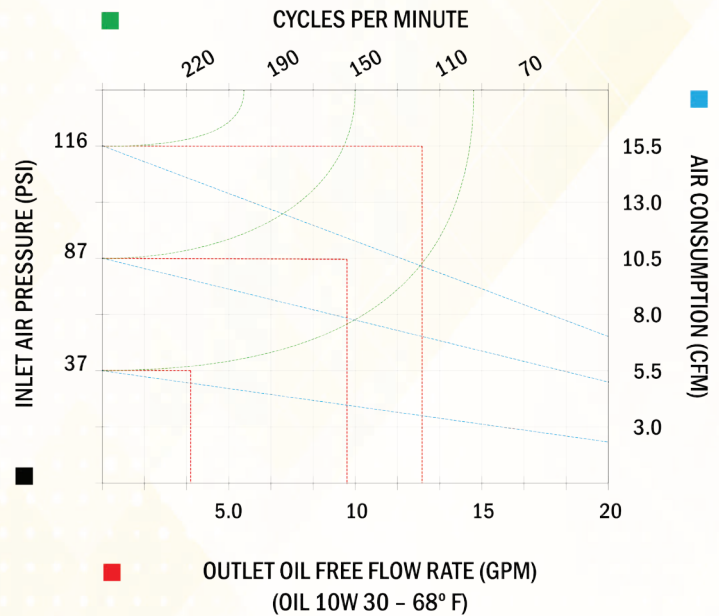

### TECHNICAL DATA

SKU	250101
PUMP RATIO	1:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.97"
SHANK LENGTH	9.84"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	9 lbs

These pumps are recommended for the use of transferring low viscosity oil (SAE 15/80), similar and antifreeze, for short distances (15 - 30 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**250101**

## AIR OPERATED OIL PUMP 1:1 - FOR 55 GAL DRUM FREE FLOW RATE 9.3 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

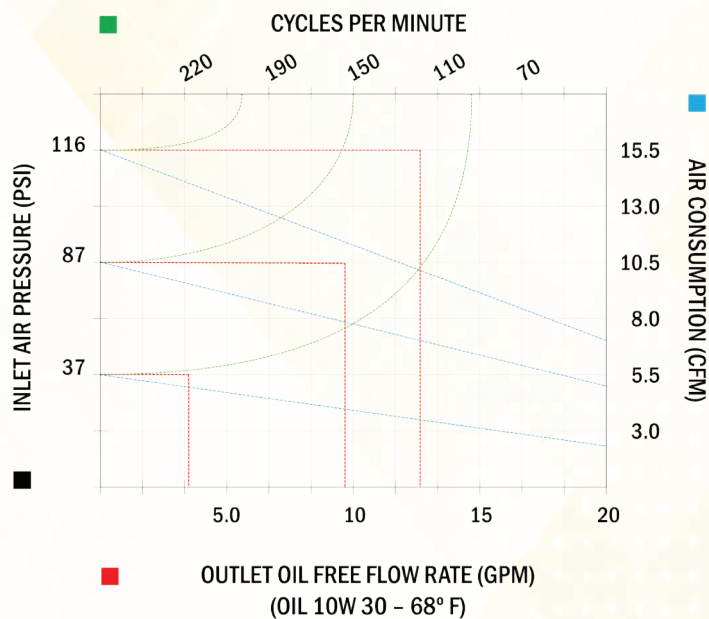

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Oil Transfer
- Farm/Agriculture



### SUITABLE FOR :



TECHNICAL DATA	
SKU	260059
PUMP RATIO	1:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.97"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	14 lbs

These pumps are recommended for the use of transferring low viscosity oil (SAE 15/80), similar and antifreeze, for short distances (15 - 30 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**260059**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## AIR OPERATED OIL PUMP 1:1 - FOR 275 GAL TOTE FREE FLOW RATE 10.6 GPM





### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Oil Transfer
- Farm/Agriculture



SUITABLE FOR :

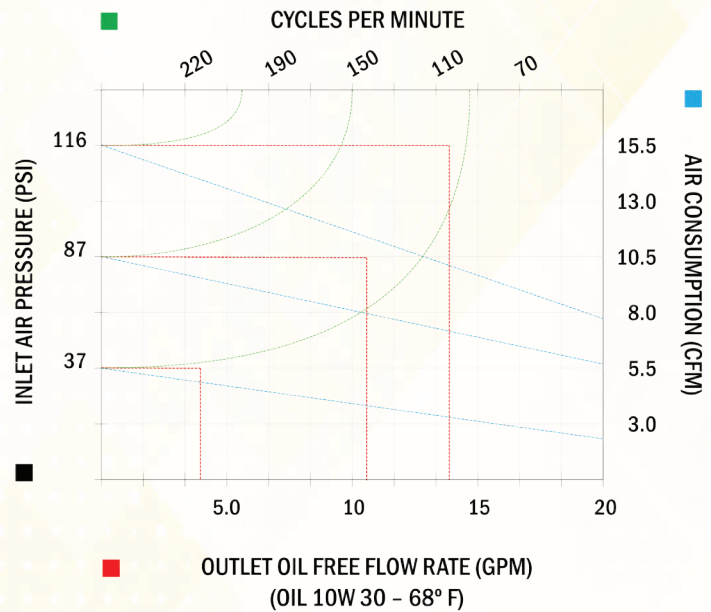

### TECHNICAL DATA

SKU	260068
PUMP RATIO	1:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5.7 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	10.6 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	49.21"
FOR DRUMS (DRUM SIZE)	275 Gal Tote
WEIGHT	15 lbs

These pumps are recommended for the use of transferring low viscosity oil (SAE 15/80), similar and antifreeze, for short distances (15 - 30 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**260068**

## AIR OPERATED OIL PUMP 3:1 - STUB (WALL MOUNTING) FREE FLOW RATE 6.6 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

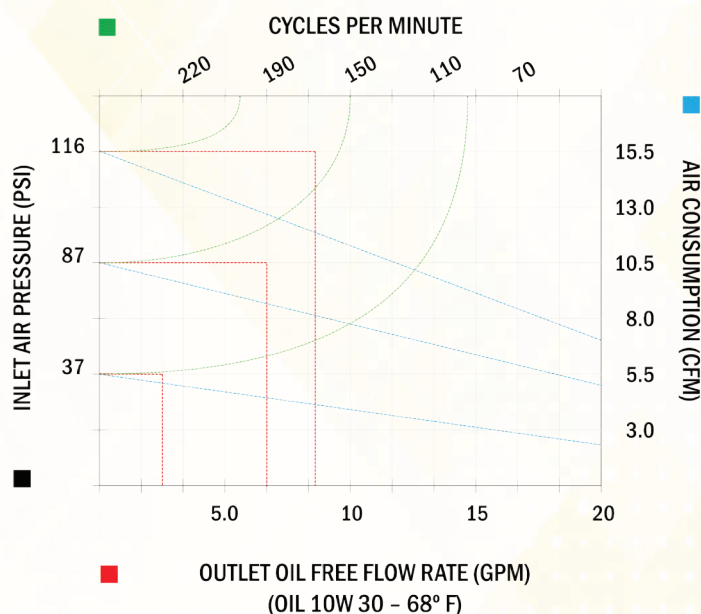


### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



**251901**

TECHNICAL DATA	
SKU	251901
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	6.6 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.65"
SHANK LENGTH	8.46"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	9 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), similar and antifreeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.


PUMPS




## AIR OPERATED OIL PUMP 3:1 - FOR 16 GAL DRUM FREE FLOW RATE 6.6 GPM

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR :

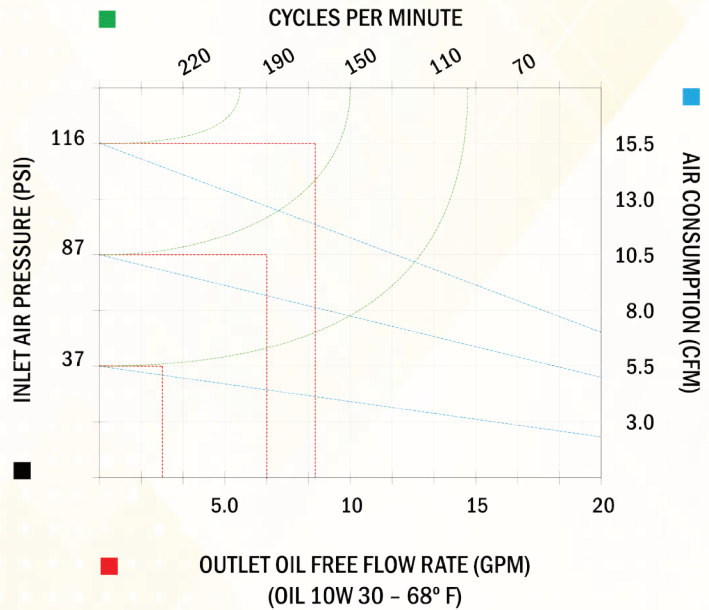

### TECHNICAL DATA

SKU	260026
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	6.6 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.65"
SHANK LENGTH	29.15"
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	12 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), similar and antifreeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

260026

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

## AIR OPERATED OIL PUMP 3:1 - FOR 55 GAL DRUM FREE FLOW RATE 6.6 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

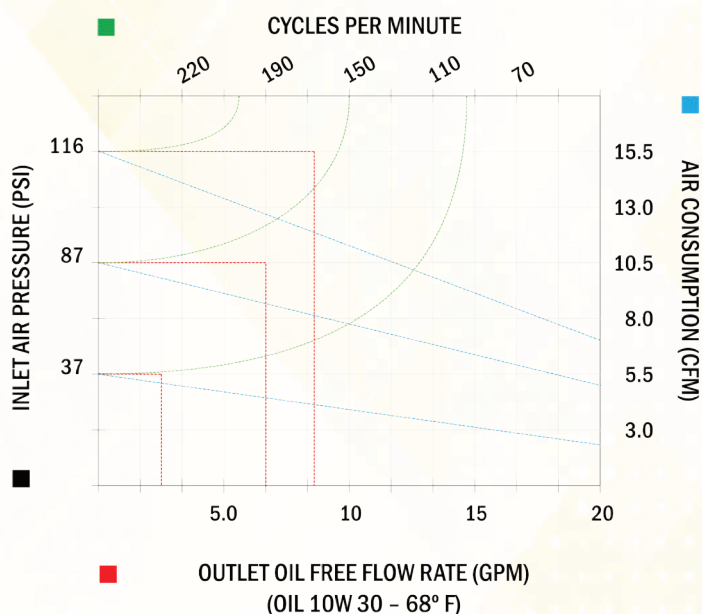

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



TECHNICAL DATA	
SKU	251902
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	6.6 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	13 lbs



**251902**

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), similar and antifreeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## AIR OPERATED OIL PUMP 3:1 - DOUBLE-ACTING STUB (WALL MOUNTING) FREE FLOW RATE 7.9 GPM

### Typical Applications



- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



**260048**



SUITABLE FOR :

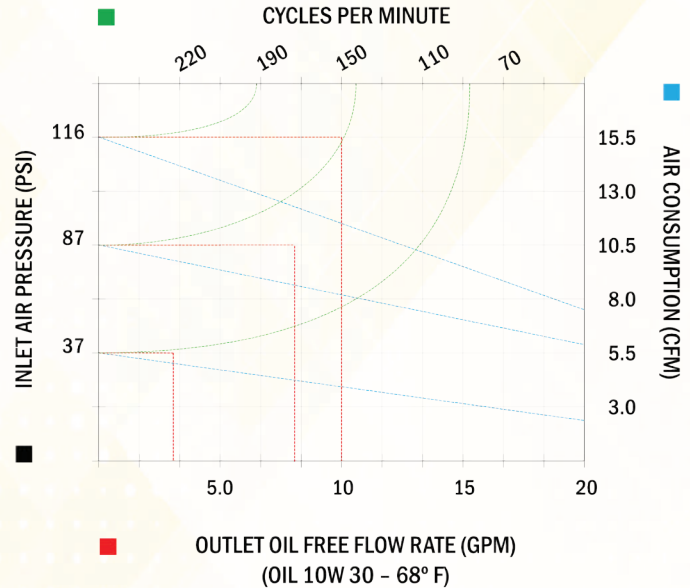

### TECHNICAL DATA

SKU	260048
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5.7 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	8.45"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	12 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## AIR OPERATED OIL PUMP 3:1 - DOUBLE-ACTING FOR 55 GAL DRUM FREE FLOW RATE 7.9 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

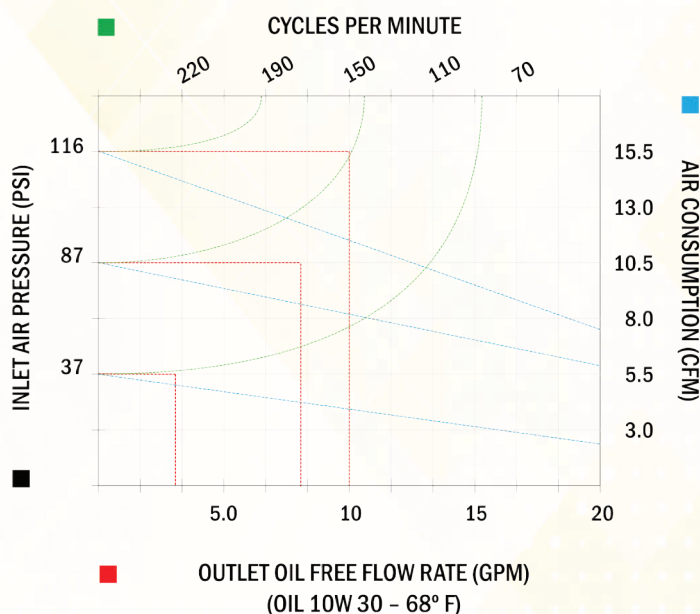

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



TECHNICAL DATA	
SKU	260031
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5.7 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	17 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**260031**



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## AIR OPERATED OIL PUMP 3:1 - DOUBLE-ACTING FOR 275 GAL TOTE FREE FLOW RATE 7.9 GPM





### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR :

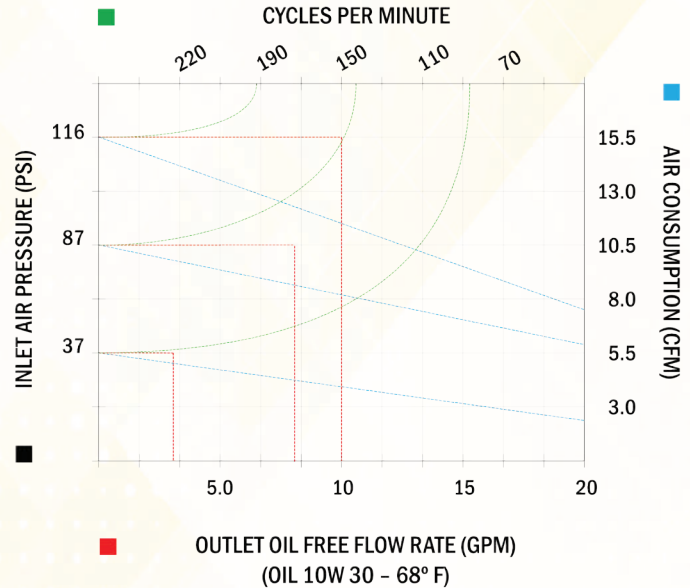

### TECHNICAL DATA

SKU	260050
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5.7 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	49.21"
FOR DRUMS (DRUM SIZE)	275 Gal Tote
WEIGHT	19 lbs

260050

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## AIR OPERATED OIL PUMP 3:1 - DOUBLE-ACTING - HIGH DELIVERY STUB (WALL MOUNTING) FREE FLOW RATE 10.6 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

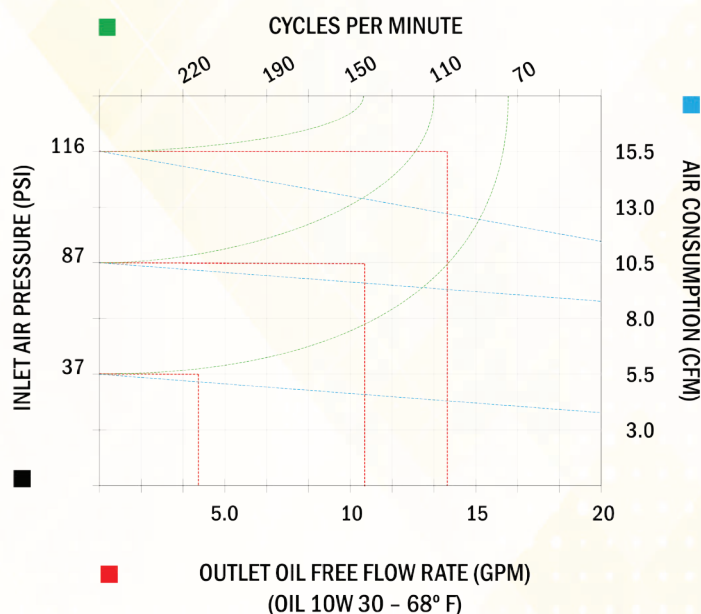

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



**260038**

TECHNICAL DATA	
SKU	260038
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	9 CFM
AIR INLET	3/8" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	10.6 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	8.66"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	22 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.




## AIR OPERATED OIL PUMP 3:1 - DOUBLE-ACTING - HIGH DELIVERY FOR 55 GAL DRUM FREE FLOW RATE 10.6 GPM




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :

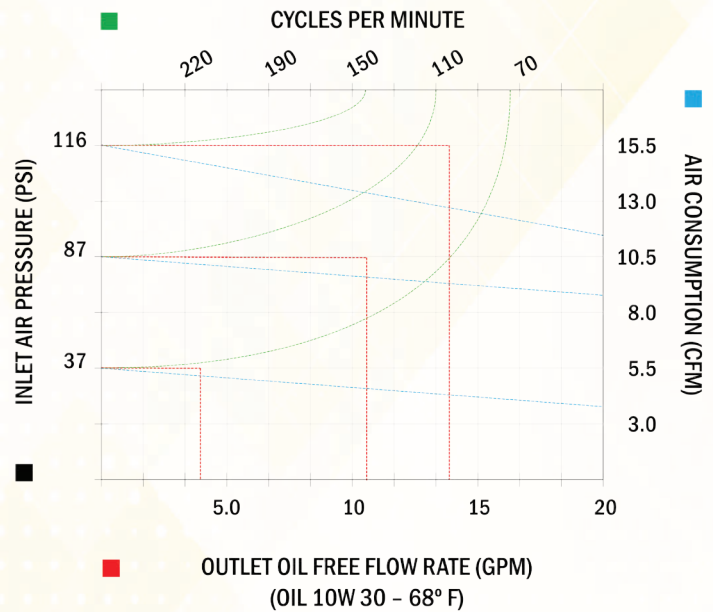

### TECHNICAL DATA

SKU	260029
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	9 CFM
AIR INLET	3/8" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	10.6 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	27 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**260029**

## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING STUB (WALL MOUNTING) FREE FLOW RATE 7.4 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

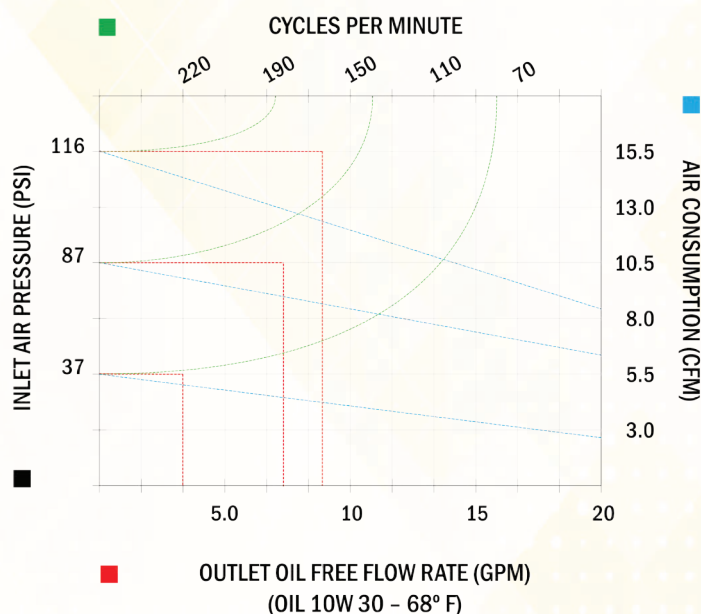


### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



**251903**

TECHNICAL DATA	
SKU	251903
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	6.6 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.4 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	8.46"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	17 lbs


These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.




## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING FOR 16 GAL DRUM FREE FLOW RATE 7.4 GPM

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :

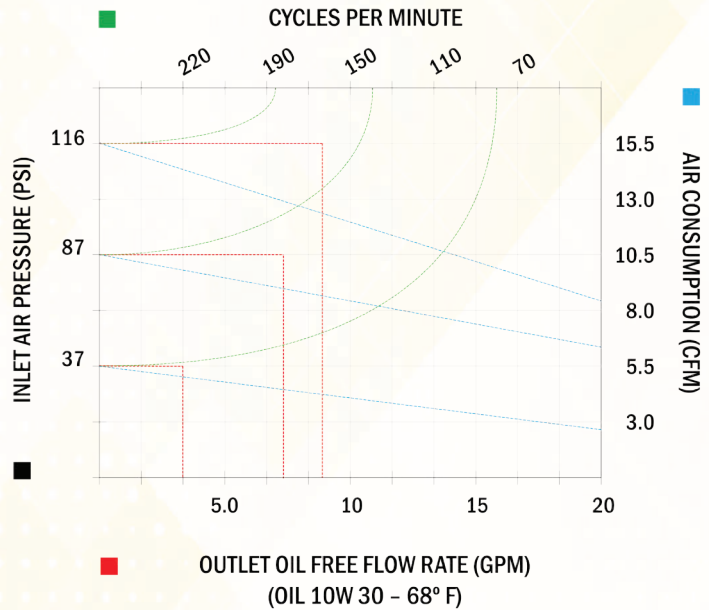

### TECHNICAL DATA

SKU	260024
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	6.6 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.4 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	29.10"
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	16 lbs

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**260024**

## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING FOR 55 GAL DRUM FREE FLOW RATE 7.4 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

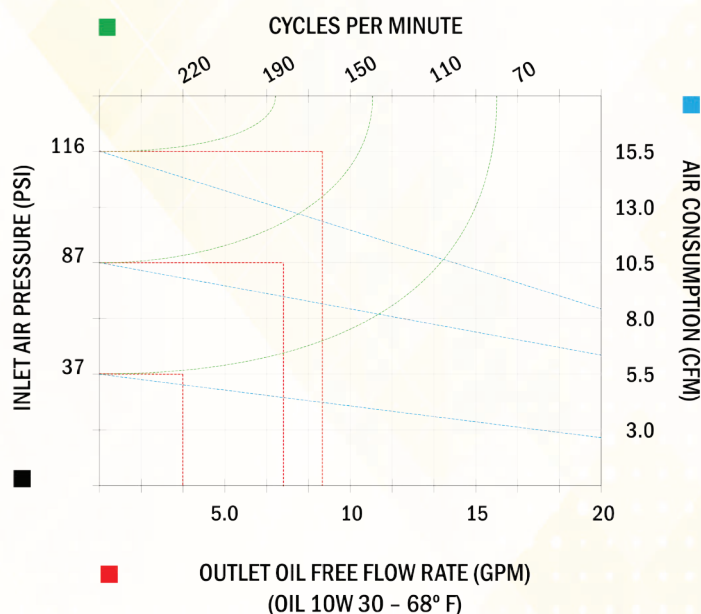

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



TECHNICAL DATA	
SKU	251904
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	6.6 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.4 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	17 lbs

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**251904**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING FOR 275 GAL TOTE FREE FLOW RATE 7.4 GPM





### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :

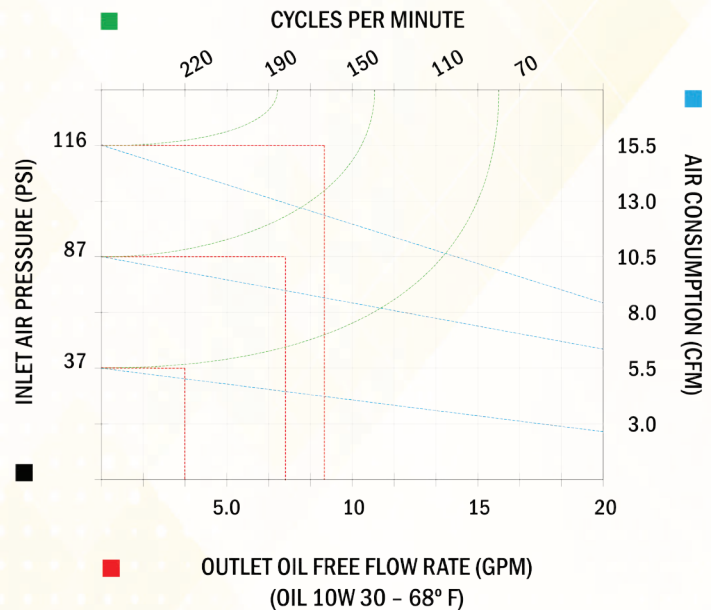

### TECHNICAL DATA

SKU	250107
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	6.6 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.4 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	49.21"
FOR DRUMS (DRUM SIZE)	275 Gal Tote
WEIGHT	20 lbs

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

250107

## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING - HIGH DELIVERY STUB (WALL MOUNTING) FREE FLOW RATE 9.3 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

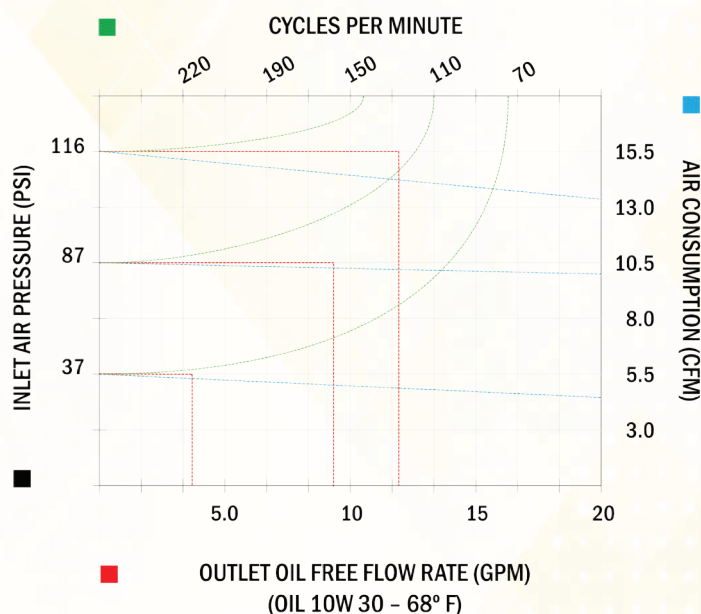

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



**250108**

TECHNICAL DATA	
SKU	250108
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	10.2 CFM
AIR INLET	3/8" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	8.66"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	22 lbs

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240) and anti-freeze, for medium through long distances (490 - 655 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.






## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING - HIGH DELIVERY FOR 55 GAL DRUM FREE FLOW RATE 9.3 GPM





**250109**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :

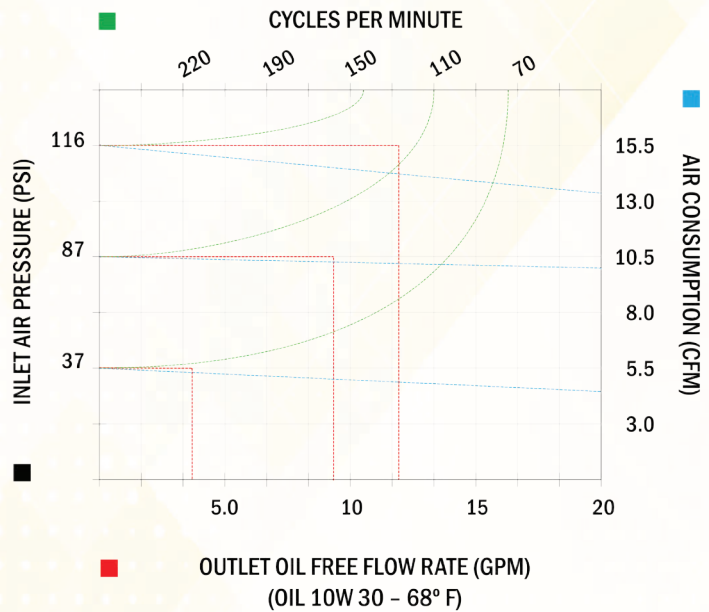

### TECHNICAL DATA

SKU	250109
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	10.2 CFM
AIR INLET	3/8" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	23 lbs

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240) and anti-freeze, for medium through long distances (490 - 655 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING - HIGH DELIVERY FOR 275 GAL TOTE FREE FLOW RATE 9.3 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

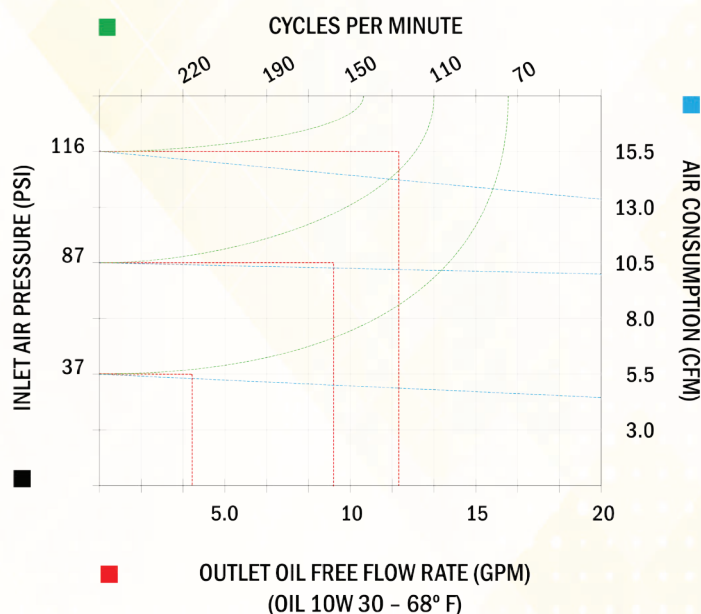


### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



### SUITABLE FOR :



**250110**

TECHNICAL DATA	
SKU	250110
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	10.2 CFM
AIR INLET	3/8" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	49.21"
FOR DRUMS (DRUM SIZE)	275 Gal Tote
WEIGHT	27 lbs

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240) and anti-freeze, for medium through long distances (490 - 655 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.




# INDUSTRIAL AIR OPERATED OIL PUMP

## 8:1 - STUB (WALL MOUNTING)



### FREE FLOW RATE 9.3 GPM

#### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



SUITABLE FOR :

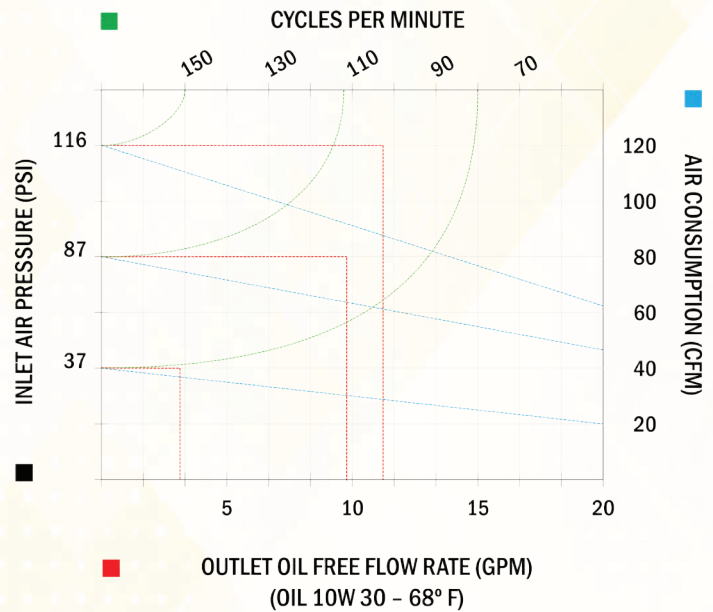

#### TECHNICAL DATA

SKU	250106
PUMP RATIO	8:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	8.66"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	31 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI.

The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## 250106

## INDUSTRIAL AIR OPERATED OIL PUMP 8:1 - FOR 55 GAL DRUM FREE FLOW RATE 9.3 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

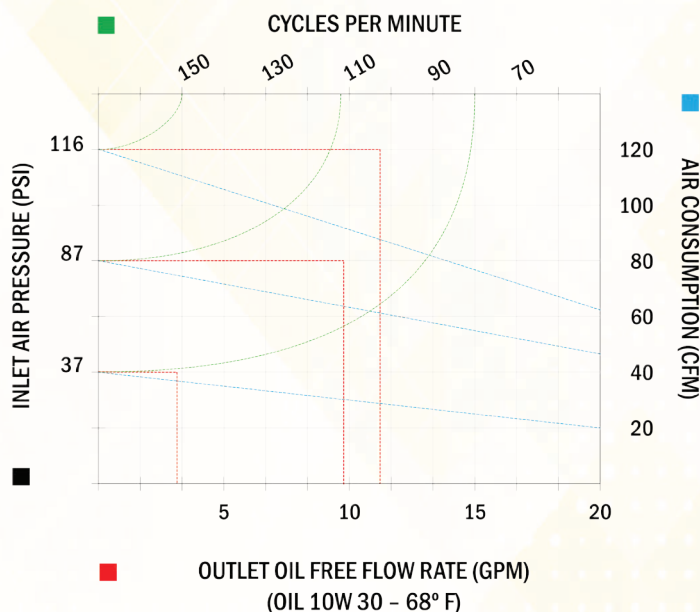

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



### SUITABLE FOR :



**250111**

TECHNICAL DATA	
SKU	250111
PUMP RATIO	8:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



# INDUSTRIAL AIR OPERATED OIL PUMP


## 8:1 - FOR 275 GAL TOTE

### FREE FLOW RATE 9.3 GPM




#### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



#### SUITABLE FOR :

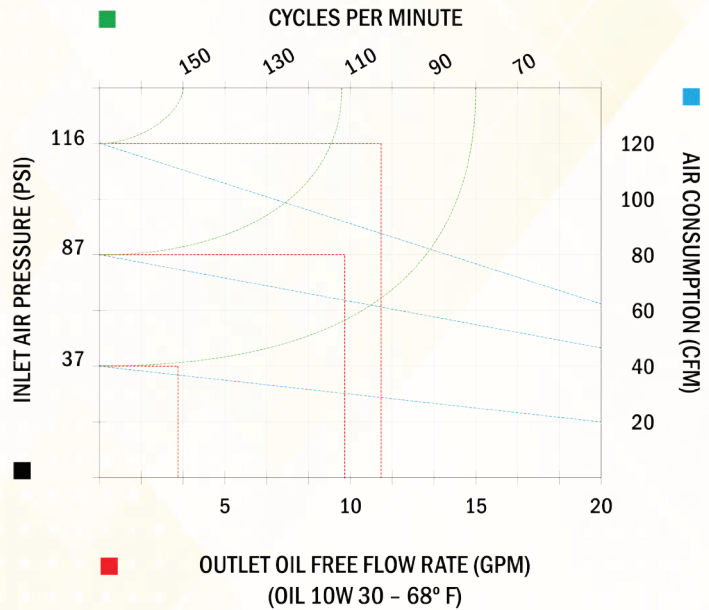

#### TECHNICAL DATA

SKU	250112
PUMP RATIO	8:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	8.66"
FOR DRUMS (DRUM SIZE)	275 Gal Tote
WEIGHT	38 lbs

## 250112

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI.

The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## INDUSTRIAL AIR OPERATED OIL PUMP 10:1 - STUB (WALL MOUNTING) FREE FLOW RATE 11.9 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

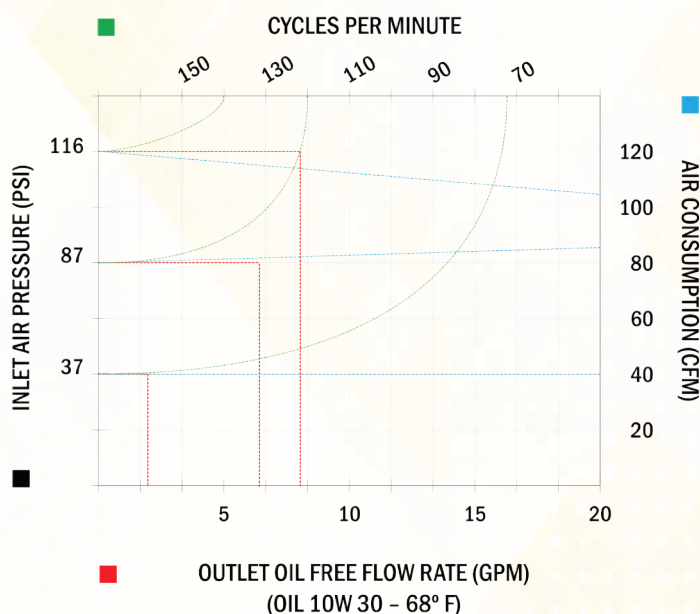

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



### SUITABLE FOR :



**251905**

TECHNICAL DATA	
SKU	251905
PUMP RATIO	10:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	86 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	11.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.77"
SHANK LENGTH	8.66"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



## INDUSTRIAL AIR OPERATED OIL PUMP

### 12:1 - FOR 55 GAL DRUM


### FREE FLOW RATE 7.9 GPM




**260103**

#### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



#### SUITABLE FOR :

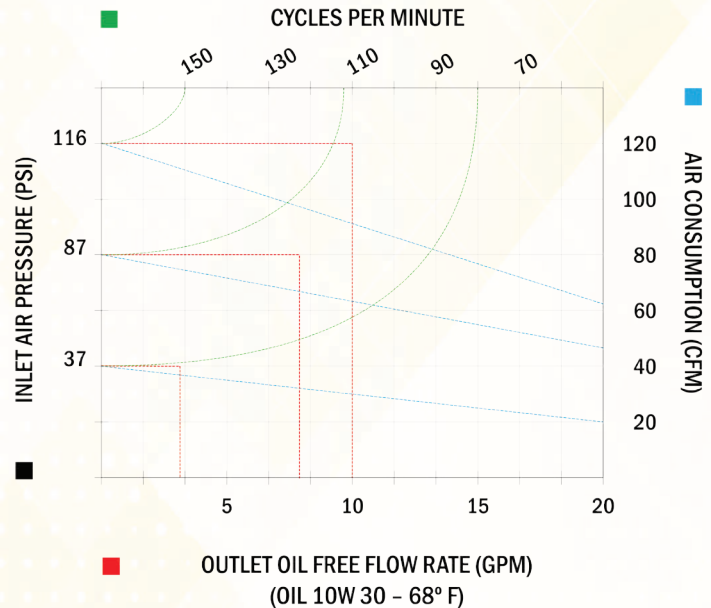

#### TECHNICAL DATA

SKU	260103
PUMP RATIO	12:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	7.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	35 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. Also, suitable for the transfer of medium through high viscosity grease. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

## INDUSTRIAL AIR OPERATED OIL PUMP 20:1 - FOR 55 GAL DRUM FREE FLOW RATE 6.4 GPM

OIL 0  
ANTIFREEZE AN

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

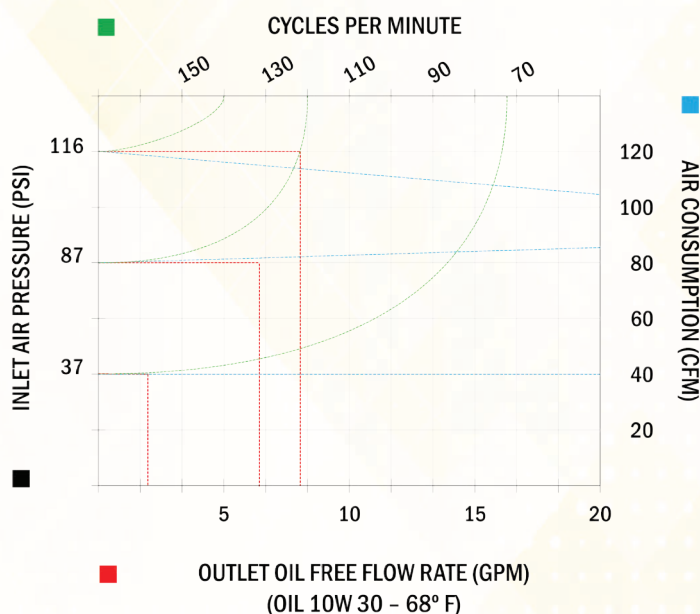

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



### TECHNICAL DATA

SKU	251920
PUMP RATIO	20:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	86 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	6.4 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	36 lbs

### SUITABLE FOR :



These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. Also, suitable for the transfer of medium through high viscosity grease. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

**251920**



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## DIAPHRAGM PUMP ALUMINUM - 1/2" FREE FLOW RATE 14.5 GPM

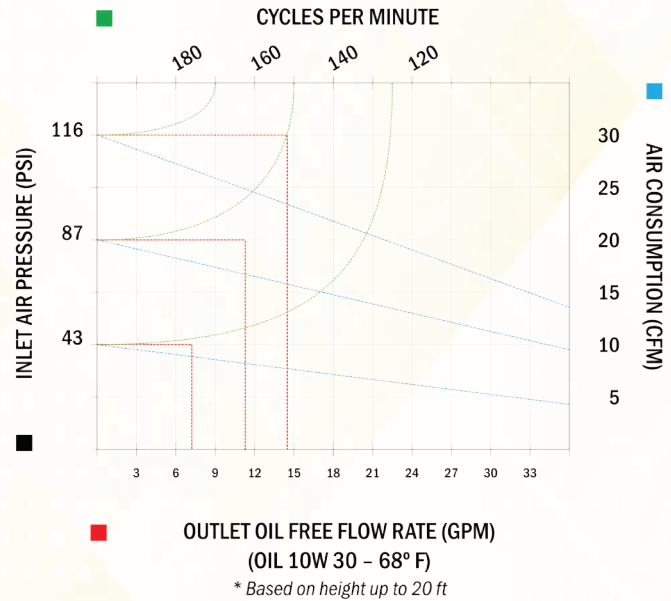

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 231201



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	231201	<b>MAX. VISCOSITY</b>	20.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	1/8"
<b>FLUID INLET</b>	1/2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1/2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	14.5 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	13 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	68 dB	<b>WEIGHT</b>	11 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP ALUMINUM - 3/4" FREE FLOW RATE 29 GPM



PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES


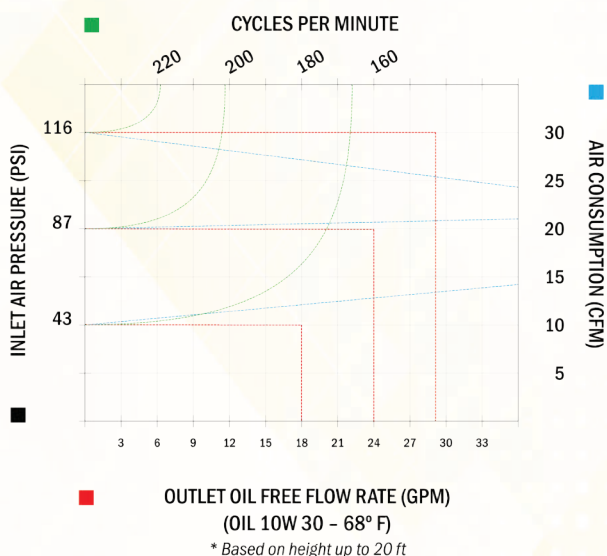


EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 233401

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



### TECHNICAL DATA

<b>SKU</b>	233401	<b>MAX. VISCOSITY</b>	25.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	1/8"
<b>FLUID INLET</b>	3/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	3/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/8" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	29 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	24 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytel + PTFE
<b>NOISE</b>	72 dB	<b>WEIGHT</b>	16 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS



DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## DIAPHRAGM PUMP ALUMINUM - 1" FREE FLOW RATE 45 GPM

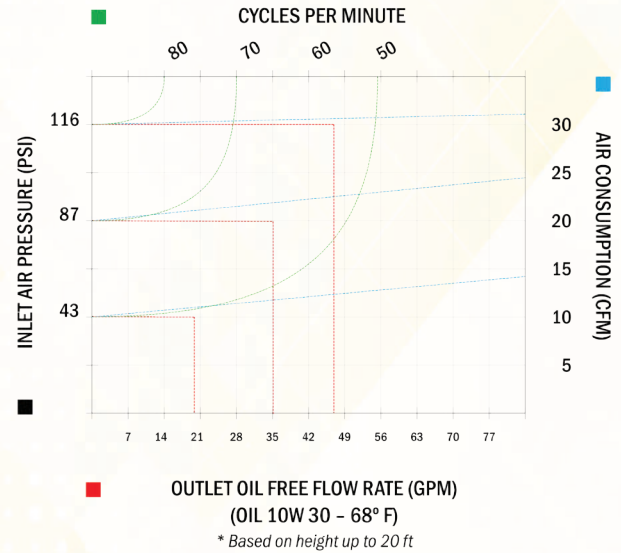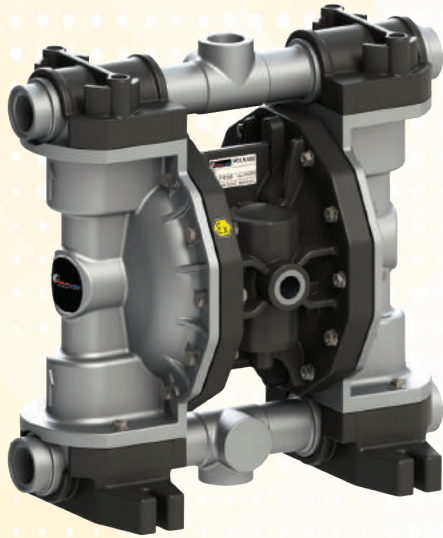

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 231001



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



### TECHNICAL DATA

SKU	231001	MAX. VISCOSITY	35.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	45 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	31 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	75 dB	WEIGHT	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.



The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP ALUMINUM - 1.1/4" FREE FLOW RATE 66 GPM

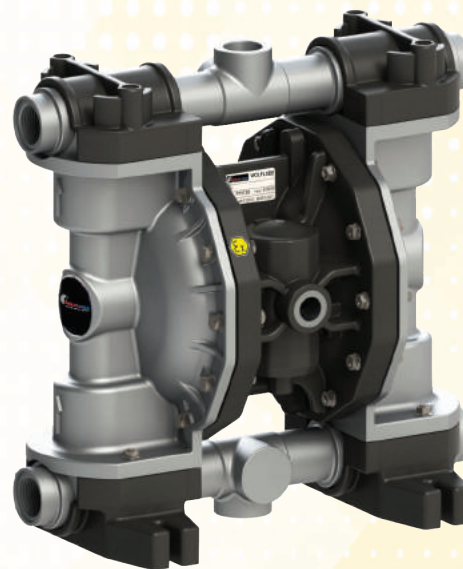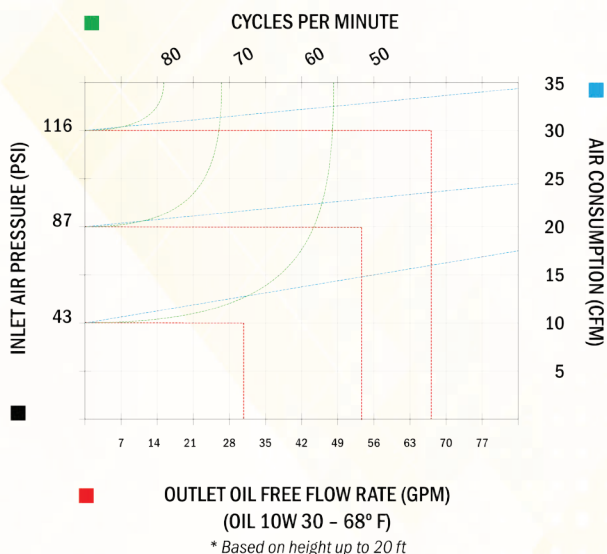

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 231141



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	231141	<b>MAX. VISCOSITY</b>	35.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/2" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	66 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	35 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytel + PTFE
<b>NOISE</b>	75 dB	<b>WEIGHT</b>	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## DIAPHRAGM PUMP ALUMINUM - 1.1/2” FREE FLOW RATE 105 GPM

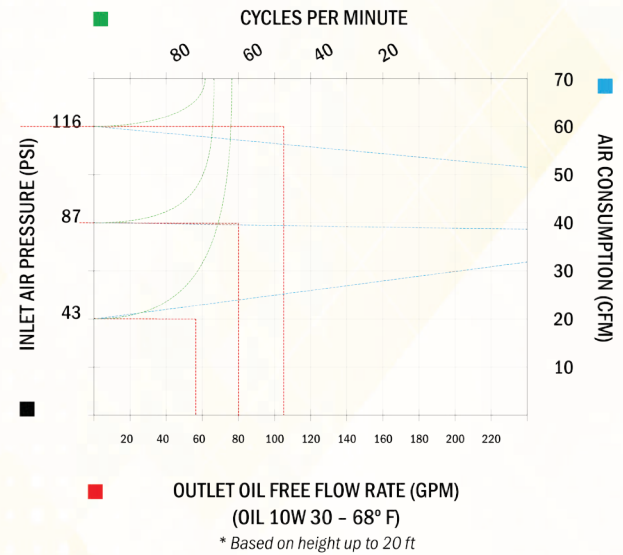

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 231121



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	231121	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	105 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	52 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	49 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP ALUMINUM - 2" FREE FLOW RATE 185 GPM



PUMPS

KITS

HOSE REELS

HOSES



NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

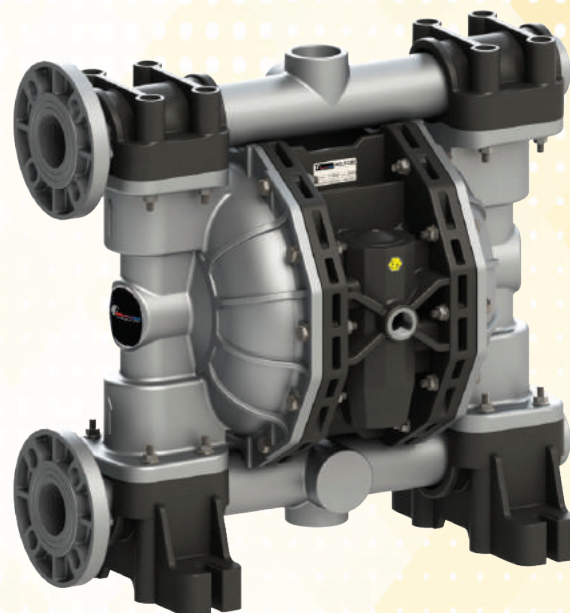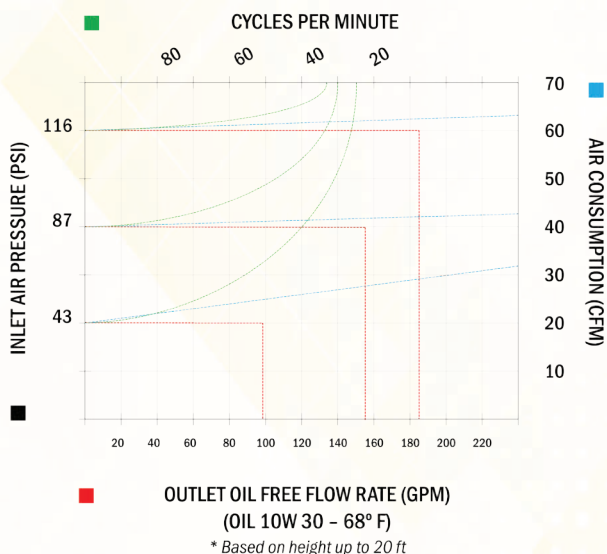


EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 232001

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

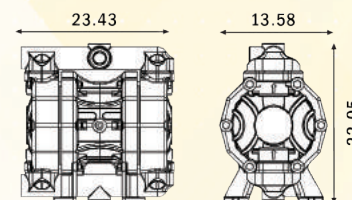

### TECHNICAL DATA


<b>SKU</b>	232001	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	185 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	65 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytelr + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	80 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP POLYPROPYLENE - 1/2" FREE FLOW RATE 14.5 GPM

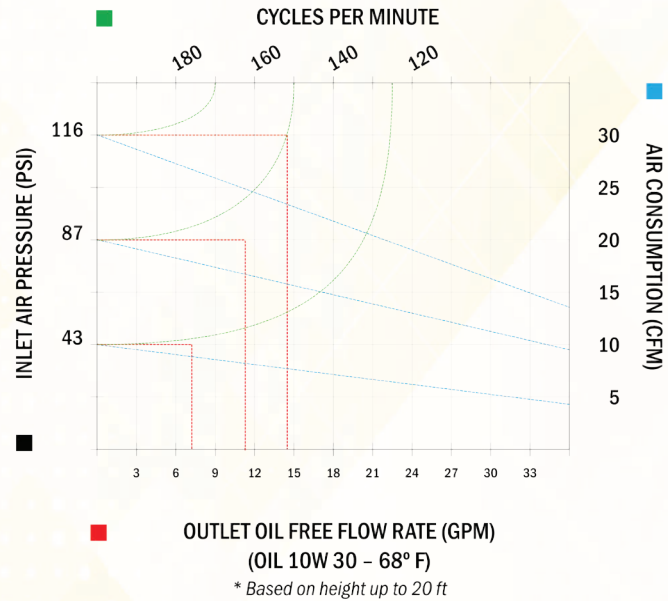

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 221205



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	221205	<b>MAX. VISCOSITY</b>	20.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	1/8"
<b>FLUID INLET</b>	1/2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1/2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	14.5 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	29 PSI to 116 PSI	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	68 dB	<b>WEIGHT</b>	10 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 3/4" FREE FLOW RATE 29 GPM



PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES


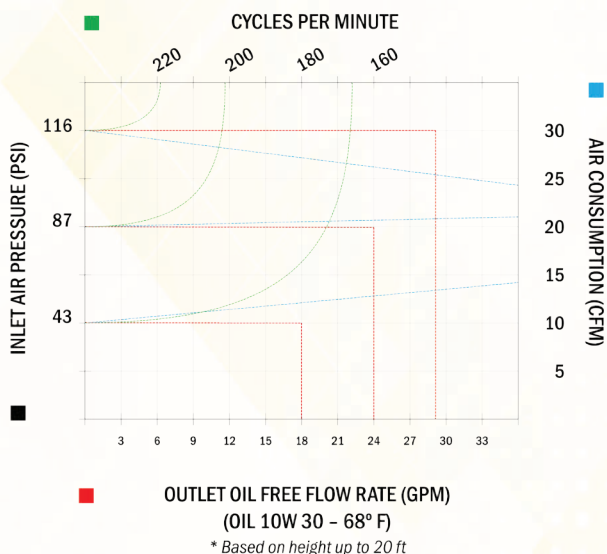


EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 223401

#### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



#### TECHNICAL DATA

SKU	223401	MAX. VISCOSITY	25.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	3/4" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	3/4" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	3/8" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	29 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	24 CFM	DIAPHRAGM MATERIAL	Hytel + PTFE
NOISE	72 dB	WEIGHT	16 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## DIAPHRAGM PUMP POLYPROPYLENE - 1" FREE FLOW RATE 45 GPM

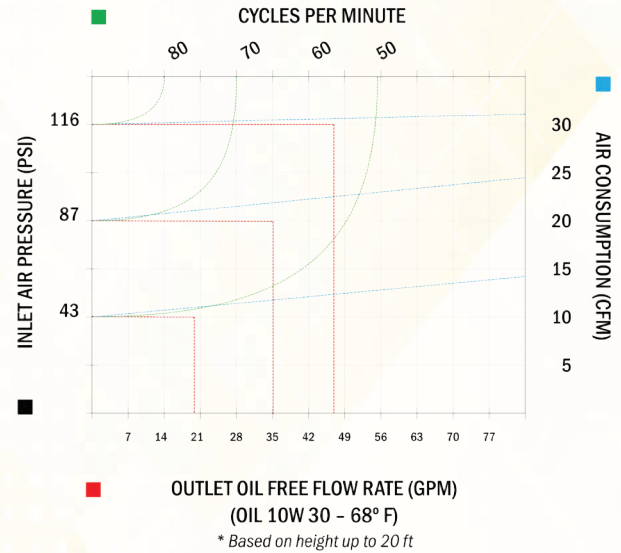

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 221001



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

SKU	221001	MAX. VISCOSITY	35.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	45 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	31 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	75 dB	WEIGHT	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1.1/4" FREE FLOW RATE 66 GPM



PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES


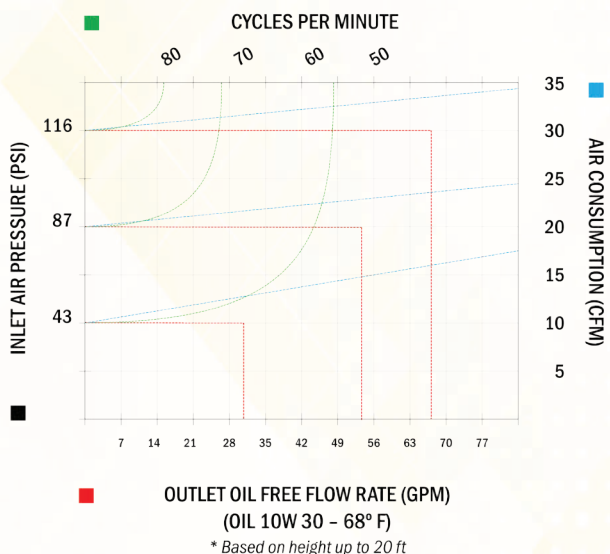


EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 221141

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



### TECHNICAL DATA

SKU	221141	MAX. VISCOSITY	35.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1.1/4" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1.1/4" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	66 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	35 CFM	DIAPHRAGM MATERIAL	Hytel + PTFE
NOISE	75 dB	WEIGHT	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## DIAPHRAGM PUMP POLYPROPYLENE - 1.1/2” FREE FLOW RATE 105 GPM

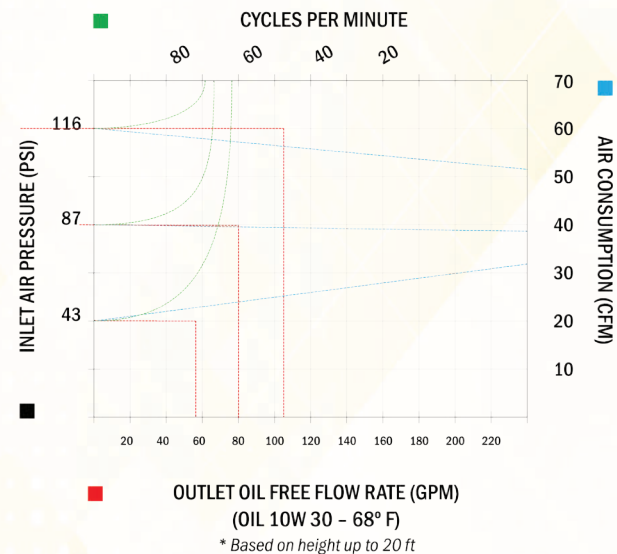

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 221121



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	221121	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	105 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	52 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	49 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 2" FREE FLOW RATE 185 GPM



PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES


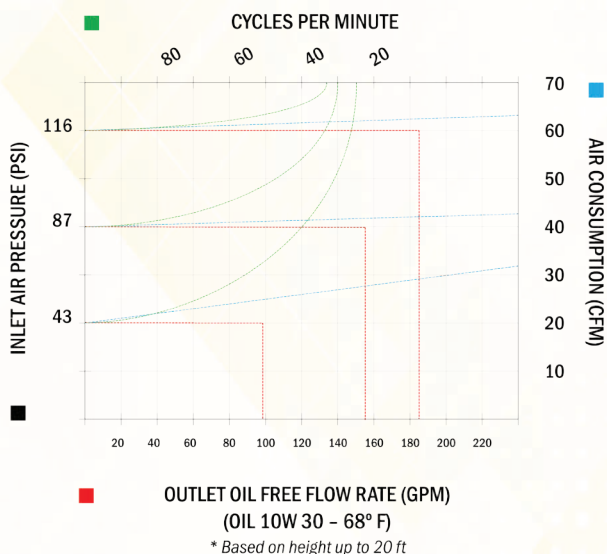


EX II 3/3 GD c IIB T 275F° ATEX zone 2

**222001**

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



### TECHNICAL DATA

<b>SKU</b>	222001	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	185 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	65 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytel + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	80 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

0  
T10

## OIL KIT - RAM - FRAME LIFTER 20:1 - FOR 55 GAL DRUM FREE FLOW RATE 6.4 GPM






**250202**

SUITABLE FOR :



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Mining
- Industrial application
- Service shops
- Fleet service facilities
- Grease transfer




Air operated two column pump lifter and press for oil and other fluids.

Its 3 way control valve lifts or pulls down the pump and the follower plate, improving the exchanging effort of the 55 gal drum. It is advised for the use of high viscosity oil and fluids from 300 CPS to 500 CPS.

The follower plate is pushed down by the pressurized pneumatic cylinders, avoiding flow interruptions by air pockets in the oil drum. Moreover, the aluminum follower plate has a double rubber ring of Ø 23.03".

### TECHNICAL DATA

SKU	250202
PUMP	251920 - Ind. Air Operated Pump 20:1
FREE FLOW RATE (87 PSI)	6.4 GPM
RAM / LIFTER	250200
FOLLOWER PLATE	250212
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	514 lbs

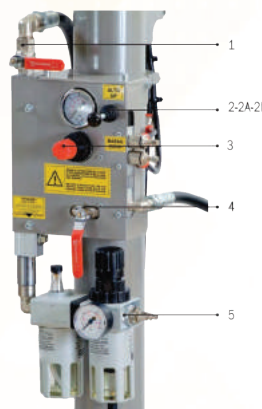

- 1 : Outlet feeding pump air
- 2 : Off position
- 2a : Lifting position up pump and follower plate
- 2b : Acting position down press-fluid
- 3 : Pressure regulator with manometer for feeding lifter air
- 4 : Cock feeding air lifter follower plate
- 5 : Inlet feeding general air into filter end lubricator



## OIL KIT - RAM - FRAME LIFTER WITHOUT PUMP - FOR 55 GAL DRUM

OIL 0

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Industrial application
- Mining
- Farm/Agriculture
- Service shops
- Fleet service facilities
- Grease transfer

SUITABLE FOR :



MAX. HEIGHT	MIN. HEIGHT	MAX. PRESSURE	PUSHING POWER	VISCOSITY
110.3"	70.9"	116 PSI	58 PSI - 992 LBS 87 PSI - 1433 LBS 116 PSI - 1918 LBS	200 to 500 ASTM (77°F)



**250200**

### TECHNICAL DATA

SKU	250200
PUMP	Without Pump
FREE FLOW RATE (87 PSI)	6.4 GPM
FOLLOWER PLATE	250212
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	514 lbs

Air operated two column pump lifter and press for oil and other fluids. Its 3 way control valve lifts or pulls down the pump and the follower plate, improving the exchanging effort of the 55 gal drum. It is advised for the use of high viscosity oil and fluids from 300 CPS to 500 CPS. The follower plate is pushed down by the pressurized pneumatic cylinders, avoiding flow interruptions by air pockets in the oil drum. It also allows the collection of all the oil from the inner walls down to the bottom of the drum, where the pump suction is assisted. Moreover, the aluminum follower plate has a double rubber ring of  $\varnothing$  23.03".

### TECHNICAL DATA

SKU	250212
FOLLOWER PLATE $\varnothing$	23.23"
SHANK ADAPTER $\varnothing$	1.65"

Aluminum casted follower plate for grease and oil which has rubber double ring  $\varnothing$  23.03" for 55 gal drum. It is quipped with ball valve, breather valve and adaptor.



**250212**

OIL 0

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250342**




## OIL KIT - TOTE MOUNTED WITH 5:1 PUMP FREE FLOW RATE 7.4 GPM

### TECHNICAL DATA

SKU	250342
PUMP	250107 - Air Operated Pump 5:1 - 7.4 GPM
HOSE REEL	253801 - 30 ft Hose Length
TOTE BRACKET	250013 - For Pump and Hose Reel
NOZZLE BRACKET	250006 - Picking up Drop Bracket
NOZZLE BRACKET - ADAPTOR	250014 - Picking up Drop Adaptor
NOZZLE	250250 - Digital Oil Control Handle
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	107 lbs

SUITABLE FOR :



\* Available in different configurations upon request.  
\*\* Tote not included.

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Service shops
- Industrial application
- Fast lube centers
- Fleet service facilities



**250343**



## OIL KIT - TOTE MOUNTED WITH 3:1 PUMP - D.A FREE FLOW RATE 7.9 GPM

### TECHNICAL DATA

SKU	250343
PUMP	260050 - Air Operated Pump 3:1 - D.A - 7.9 GPM
HOSE REEL	253801 - 30 ft Hose Length
TOTE BRACKET	250013 - For Pump and Hose Reel
NOZZLE BRACKET	250006 - Picking up Drop Bracket
NOZZLE BRACKET - ADAPTOR	250014 - Picking up Drop Adaptor
NOZZLE	250250 - Digital Oil Control Handle
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	106 lbs

SUITABLE FOR :



\* Available in different configurations upon request.  
\*\* Tote not included.


## OIL KIT - TOTE MOUNTED WITH 5:1 PUMP FREE FLOW RATE 7.4 GPM



TECHNICAL DATA	
SKU	250340
PUMP	250107 - Air Operated Pump 5:1 - 7.4 GPM
TOTE BRACKET	250013 - For Pump and Hose Reel
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	48 lbs



SUITABLE FOR :



**250340**

\* Available in different configurations upon request.  
\*\* Tote not included.

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Service shops
- Industrial application
- Fast lube centers
- Fleet service facilities


## OIL KIT - TOTE MOUNTED WITH 3:1 PUMP - D.A FREE FLOW RATE 7.9 GPM



TECHNICAL DATA	
SKU	250341
PUMP	260050 - Air Operated Pump 3:1 - D.A - 7.9 GPM
TOTE BRACKET	250013 - For Pump and Hose Reel
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	47 lbs



SUITABLE FOR :



**250341**

\* Available in different configurations upon request.  
\*\* Tote not included.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250338**

SUITABLE FOR :



## OIL KIT - WALL MOUNTED WITH 5:1 PUMP FREE FLOW RATE 7.4 GPM

### TECHNICAL DATA

SKU	250338
PUMP	251903 - Air Operated Pump 5:1
PUMP BRACKET	204601 - Wall Mounted Bracket
TOTE BRACKET	250013 - For Pump and Hose Reel
DOWN TUBE KIT	250016 - Down Tube Kit
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	32 lbs

\* Available in different configurations upon request.  
\*\* Tote not included.

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Service shops
- Industrial application
- Fast lube centers
- Fleet service facilities



**250339**

SUITABLE FOR :



## OIL KIT - TOTE MOUNTED WITH 3:1 PUMP - D.A FREE FLOW RATE 7.9 GPM

### TECHNICAL DATA

SKU	250339
PUMP	260048 - Air Operated Pump 3:1 - D.A
PUMP BRACKET	204601 - Wall Mounted Bracket
TOTE BRACKET	250013 - For Pump and Hose Reel
DOWN TUBE KIT	250016 - Down Tube Kit
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	31 lbs

\* Available in different configurations upon request.  
\*\* Tote not included.

## DRUM KIT WITH 5:1 PUMP, TROLLEY, HOSE REEL AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250314
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250067 - Four Wheels Trolley
HOSE REEL	253801 - 30 ft Hose Length
CONNECTION OIL HOSE	241405 - Connection Hose - 5 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	168 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## DRUM KIT WITH 5:1 PUMP, TROLLEY AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250312
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250067 - Four Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	132 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## DRUM KIT WITH 5:1 PUMP, TROLLEY AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250310
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250066 - Four Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	108 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture


OIL 0

ANTIFREEZE AN

SUITABLE FOR :



55 GAL

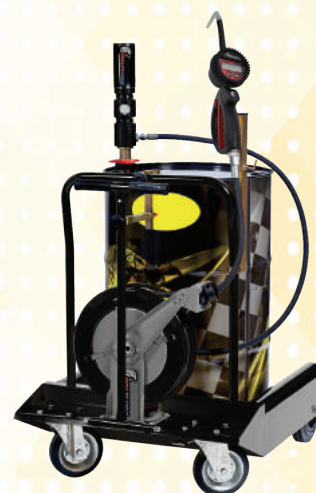

**250314**

\* Available in different configurations upon request.  
\*\* Drum not included.

OIL 0

ANTIFREEZE AN

SUITABLE FOR :



55 GAL



**250312**

\* Available in different configurations upon request.  
\*\* Drum not included.

OIL 0

ANTIFREEZE AN

SUITABLE FOR :



55 GAL



**250310**

\* Available in different configurations upon request.  
\*\* Drum not included.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



## 250320

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



## DRUM KIT WITH 5:1 PUMP, TROLLEY, HOSE REEL AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250320
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	253801 - 30 ft Hose Length
CONNECTION OIL HOSE	241405 - Connection Hose - 5 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	110 lbs

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## 250318

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



## DRUM KIT WITH 5:1 PUMP, TROLLEY AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250318
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	73 lbs

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## 250316

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



## DRUM KIT WITH 5:1 PUMP, TROLLEY AND NOZZLE

### TECHNICAL DATA

SKU	250316
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250252 - Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	72 lbs

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## DRUM KIT WITH 3:1 PUMP, TROLLEY, HOSE REEL AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250326
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	253801 - 30 ft Hose Length
CONNECTION OIL HOSE	260032 - Connection Hose - 5 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	104 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## DRUM KIT WITH 3:1 PUMP, TROLLEY AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	253101
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	69 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## DRUM KIT WITH 3:1 PUMP, TROLLEY AND NOZZLE

### TECHNICAL DATA

SKU	250322
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250252 - Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	67 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

OIL 0

ANTIFREEZE AN

SUITABLE FOR :



**250326**

\* Available in different configurations upon request.  
\*\* Drum not included.

OIL 0

ANTIFREEZE AN

SUITABLE FOR :



**253101**

\* Available in different configurations upon request.  
\*\* Drum not included.

OIL 0

ANTIFREEZE AN

SUITABLE FOR :



**250322**

\* Available in different configurations upon request.  
\*\* Drum not included.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250336**

\* Available in different configurations upon request.

\*\* Drum not included.



## OIL KIT - WALL MOUNTED WITH 5:1 PUMP, HOSE REEL AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250336
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
HOSE REEL	253801 - 30 ft Hose Length
CONNECTION OIL HOSE	241405 - Connection Hose - 5 ft
NOZZLE	250250 - Digital Oil Control Handle
NOZZLE BRACKET	250006 - Picking up Drop Bracket
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	80 lbs

SUITABLE FOR :



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**250334**

\* Available in different configurations upon request.

\*\* Drum not included.



## OIL KIT - DRUM MOUNTED WITH 5:1 PUMP, HOSE REEL AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250334
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
CONNECTION OIL HOSE	241405 - Connection Hose - 5 ft
HOSE REEL	253801 - 30 ft Hose Length
NOZZLE	250250 - Digital Oil Control Handle
NOZZLE BRACKET	250006 - Picking up Drop Bracket
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	72 lbs

SUITABLE FOR :



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## WALL MOUNTED KIT WITH 5:1 PUMP AND DOWN TUBE

### TECHNICAL DATA

SKU	250331
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	26 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## WALL MOUNTED KIT WITH 3:1 PUMP AND DOWN TUBE

### TECHNICAL DATA

SKU	250330
PUMP	251901 - Air Operated Pump 3:1 - 6.6 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	22 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## WALL MOUNTED KIT WITH 1:1 PUMP AND DOWN TUBE

### TECHNICAL DATA

SKU	250329
PUMP	250101 - Air Operated Pump 1:1 - 9.3 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	22 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



SUITABLE FOR :



55 GAL



**250331**

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



55 GAL



**250330**

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



55 GAL



**250329**

\* Available in different configurations upon request.  
\*\* Drum not included.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250303**

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



## DRUM MOUNTED KIT WITH 5:1 PUMP, HOSE AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250303
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	25 lbs

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**253201**

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



## DRUM MOUNTED KIT WITH 3:1 PUMP, HOSE AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	253201
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	21 lbs

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**250344**

\* Available in different configurations upon request.  
\*\* Drum not included.



SUITABLE FOR :



## DRUM MOUNTED KIT WITH 3:1 PUMP, GOOSENECK SPIGOT AND DRIP PAN

### TECHNICAL DATA

SKU	250344
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
DISPENSER	200301 - Gooseneck Spigot
BRACKET	204102 - Drip Pan
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	18 lbs

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## OIL KIT - DRUM MOUNTED WITH 5:1 PUMP, 4 WHEEL TROLLEY AND DIGITAL NOZZLE

### TECHNICAL DATA

SKU	250308
PUMP	260024 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	260030 - Four Wheels Trolley
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	53 lbs

#### Typical Applications

- Automotive dealerships
- Service shops
- Fast lube centers
- Farm/Agriculture
- Fleet service facilities



SUITABLE FOR :



16 GAL

### 250308

- \* Available in different configurations upon request.
- \*\* Drum not included.

## OIL KIT - DRUM MOUNTED WITH 5:1 PUMP, 4 WHEEL TROLLEY AND NOZZLE

### TECHNICAL DATA

SKU	250307
PUMP	260024 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	260030 - Four Wheels Trolley
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250252 - Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	50 lbs

#### Typical Applications

- Automotive dealerships
- Service shops
- Fast lube centers
- Farm/Agriculture
- Fleet service facilities



SUITABLE FOR :



16 GAL

### 250307

- \* Available in different configurations upon request.
- \*\* Drum not included.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



## 250301

\* Available in different configurations upon request.  
\*\* Drum not included.



### OIL KIT - DRUM MOUNTED WITH 5:1 PUMP AND DIGITAL NOZZLE

#### TECHNICAL DATA

SKU	250301
PUMP	260024 - Air Operated Pump 5:1 - 7.4 GPM
DISPENSING HOSE	260025 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	23 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR :



## 250302

\* Available in different configurations upon request.  
\*\* Drum not included.



### OIL KIT - DRUM MOUNTED WITH 3:1 PUMP AND DIGITAL NOZZLE

#### TECHNICAL DATA

SKU	250302
PUMP	260026 - Air Operated Pump 3:1 - 6.6 GPM
DISPENSING HOSE	260025 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	19 lbs

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR :



## SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.

## SELECTING HOSE REELS

The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

## SIZES AND CAPACITY


<b>MODEL F400</b>	Up to 30ft 3/8" or Up to 30ft 1/4"
<b>MODEL F460</b>	Up to 60ft 3/8" or Up to 50ft 1/2"
<b>MODEL F550</b>	Up to 80ft 1/2" or Up to 50ft 3/4"
<b>MODEL F555</b>	Up to 100ft 1/2" or Up to 60ft 3/4" or Up to 50ft 1"
<b>MODEL F560</b>	Up to 100ft 3/4" or Up to 100ft 1"

## HOSE REEL INSTALLATIONS

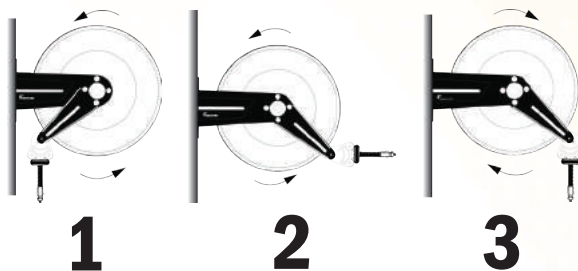

### WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 2 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.

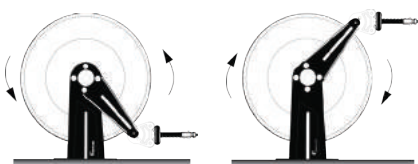

### BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.



### CEILING

Ceiling installations are the same as the wall mounted 2 set up.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **2,321 PSI**

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 1SC hose and zinc plated steel fittings NPT(f) x NPT(m).



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
260013	F400	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	28 lbs
251001	F400	1/2" NPT(m)	1/2" NPT(m)	30 ft	3/8"	36 lbs
253801	F400	1/2" NPT(m)	1/2" NPT(m)	30 ft	1/2"	38 lbs
260015	F460	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	36 lbs
251003	F460	1/2" NPT(m)	1/2" NPT(m)	50 ft	3/8"	49 lbs
253802	F460	1/2" NPT(m)	1/2" NPT(m)	50 ft	1/2"	52 lbs
251005	F460	1/2" NPT(m)	1/2" NPT(m)	60 ft	1/2"	55 lbs
260016	F550	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	49 lbs
251006	F550	1/2" NPT(m)	1/2" NPT(m)	65 ft	1/2"	61 lbs
251007	F550	1/2" NPT(m)	1/2" NPT(m)	80 ft	1/2"	75 lbs

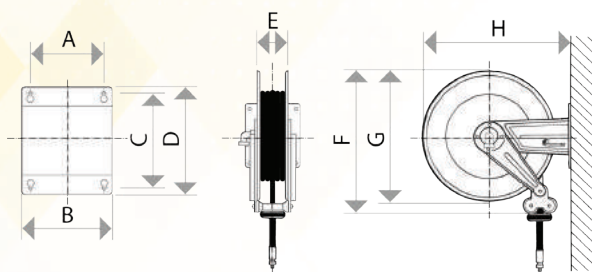

MODEL	A	B	C	D	E	F	G	H
F400	6.2"	4.7"	6.6"	7.6"	3.8"	17.7"	15.8"	17.1"
F460	6.2"	4.7"	6.6"	7.6"	3.8"	18.9"	18.1"	19.7"
F550	7.9"	5.9"	8.9"	10.7"	4.8"	23.3"	21.7"	23.7"


## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **2,321 PSI**

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 1SC hose and zinc plated steel fittings NPT(f) x NPT(m).



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
260017	F555	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	58 lbs
251008	F555	1/2" NPT(m)	1/2" NPT(m)	100 ft	1/2"	90 lbs
260018	F555	3/4" NPT(m)	3/4" NPT(m)	Without hose	-	59 lbs
251009	F555	3/4" NPT(m)	3/4" NPT(m)	50 ft	3/4"	79 lbs
251010	F555	3/4" NPT(m)	3/4" NPT(m)	60 ft	3/4"	82 lbs
260019	F555	1" NPT(m)	1" NPT(m)	Without hose	-	60 lbs
251011	F555	1" NPT(m)	1" NPT(m)	50 ft	1"	89 lbs
260020	F560	3/4" NPT(m)	3/4" NPT(m)	Without hose	-	73 lbs
251012	F560	3/4" NPT(m)	3/4" NPT(m)	80 ft	3/4"	104 lbs
251013	F560	3/4" NPT(m)	3/4" NPT(m)	100 ft	3/4"	112 lbs
260021	F560	1" NPT(m)	1" NPT(m)	Without hose	1"	74 lbs
251014	F560	1" NPT(m)	1" NPT(m)	65 ft	1"	112 lbs
251015	F560	1" NPT(m)	1" NPT(m)	100 ft	1"	132 lbs

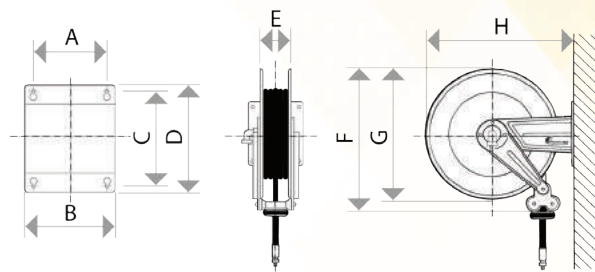

MODEL	A	B	C	D	E	F	G	H
F555	9.9"	7.9"	8.9"	10.7"	6.7"	23.3"	21.7"	23.7"
F560	17.4"	15.4"	8.9"	10.7"	14.2"	23.3"	21.7"	23.7"

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **2,321 PSI**

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 1SC hose and zinc plated steel fittings NPT(f) x NPT(m).



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
251016	CS500	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	50 lbs
251017	CS500	1/2" NPT(m)	1/2" NPT(m)	30 ft	1/2"	60 lbs
251018	CS500	1/2" NPT(m)	1/2" NPT(m)	50 ft	1/2"	66 lbs
251019	CS500	1/2" NPT(m)	1/2" NPT(m)	60 ft	1/2"	70 lbs

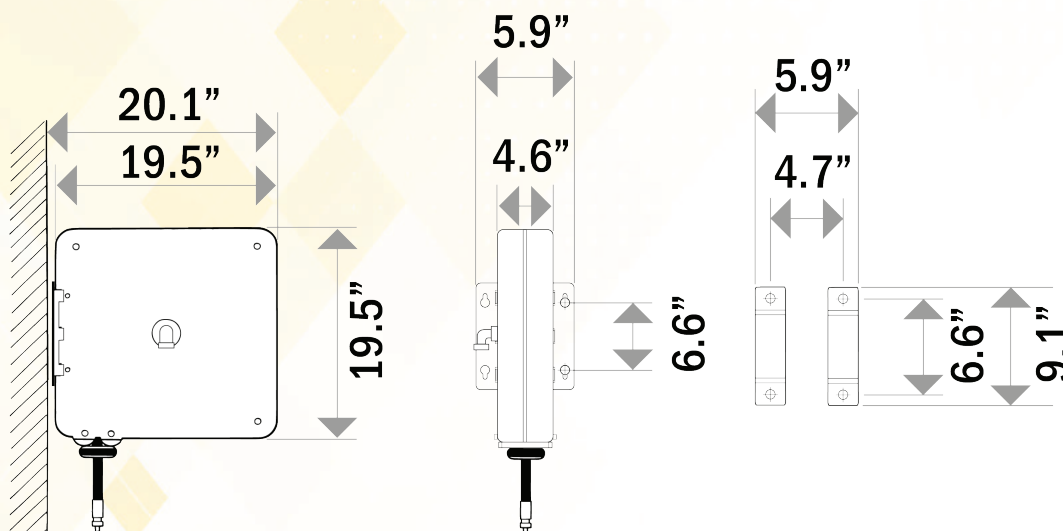

## FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/2" THREAD FOR 3/8" HOSE
  - 1/2" THREAD FOR 3/4" HOSE
  - 3/4" THREAD FOR 1/2" HOSE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE



PUMPS

KITS

HOSE REELS

Approximately Weight per Foot			
3/8"	1/2"	3/4"	1"
+ - 3.1 oz	+ - 4.2 oz	+ - 6.1 oz	+ - 9.2 oz

## 3/8" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251101	3/8"	2,610 PSI	10,440 PSI	30 ft	NPT(m) 3/8" x NPT(f) 1/2"
251102	3/8"	2,610 PSI	10,440 PSI	50 ft	NPT(m) 3/8" x NPT(f) 1/2"

HOSES

## 1/2" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251103	1/2"	2,320 PSI	9,280 PSI	30 ft	NPT(m) 1/2" x NPT(f) 1/2"
251104	1/2"	2,320 PSI	9,280 PSI	50 ft	NPT(m) 1/2" x NPT(f) 1/2"
251105	1/2"	2,320 PSI	9,280 PSI	60 ft	NPT(m) 1/2" x NPT(f) 1/2"
251106	1/2"	2,320 PSI	9,280 PSI	65 ft	NPT(m) 1/2" x NPT(f) 1/2"
251107	1/2"	2,320 PSI	9,280 PSI	80 ft	NPT(m) 1/2" x NPT(f) 1/2"
251108	1/2"	2,320 PSI	9,280 PSI	100 ft	NPT(m) 1/2" x NPT(f) 1/2"

NOZZLES & METERS

MANUAL PUMPS

## 3/4" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251109	3/4"	1,520 PSI	6,090 PSI	50 ft	NPT(m) 3/4" x NPT(f) 3/4"
251110	3/4"	1,520 PSI	6,090 PSI	65 ft	NPT(m) 3/4" x NPT(f) 3/4"
251111	3/4"	1,520 PSI	6,090 PSI	80 ft	NPT(m) 3/4" x NPT(f) 3/4"
251112	3/4"	1,520 PSI	6,090 PSI	100 ft	NPT(m) 3/4" x NPT(f) 3/4"

DRAINERS & DISPENSERS

STORAGE & FILTRATION

## 1" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251113	1"	1,280 PSI	5,075 PSI	50 ft	NPT(m) 1" x NPT(f) 1"
251114	1"	1,280 PSI	5,075 PSI	65 ft	NPT(m) 1" x NPT(f) 1"
251115	1"	1,280 PSI	5,075 PSI	100 ft	NPT(m) 1" x NPT(f) 1"

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES &amp; METERS

MANUAL PUMPS

DRAINERS &amp; DISPENSERS

STORAGE &amp; FILTRATION

ACCESSORIES



## FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/2" THREAD FOR 3/8" HOSE
  - 1/2" THREAD FOR 3/4" HOSE
  - 3/4" THREAD FOR 1/2" HOSE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE

### Approximately Weight per Foot

3/8"	1/2"	3/4"	1"
+ - 3.1 oz	+ - 4.2 oz	+ - 6.1 oz	+ - 9.2 oz

## CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
241203	1/2"	2,320 PSI	9,280 PSI	3 ft	NPT(m) 1/2" x NPT(f) 1/2"
241204	1/2"	2,320 PSI	9,280 PSI	4 ft	NPT(m) 1/2" x NPT(f) 1/2"
241205	1/2"	2,320 PSI	9,280 PSI	5 ft	NPT(m) 1/2" x NPT(f) 1/2"
241206	1/2"	2,320 PSI	9,280 PSI	6 ft	NPT(m) 1/2" x NPT(f) 1/2"
241207	1/2"	2,320 PSI	9,280 PSI	7 ft	NPT(m) 1/2" x NPT(f) 1/2"
241208	1/2"	2,320 PSI	9,280 PSI	8 ft	NPT(m) 1/2" x NPT(f) 1/2"
241209	1/2"	2,320 PSI	9,280 PSI	9 ft	NPT(m) 1/2" x NPT(f) 1/2"
241210	1/2"	2,320 PSI	9,280 PSI	10 ft	NPT(m) 1/2" x NPT(f) 1/2"
241215	1/2"	2,320 PSI	9,280 PSI	15 ft	NPT(m) 1/2" x NPT(f) 1/2"
241220	1/2"	2,320 PSI	9,280 PSI	20 ft	NPT(m) 1/2" x NPT(f) 1/2"

## CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
241403	1/2"	2,320 PSI	9,280 PSI	3 ft	NPT(f) 1/2" x NPT(f) 1/2"
241404	1/2"	2,320 PSI	9,280 PSI	4 ft	NPT(f) 1/2" x NPT(f) 1/2"
241405	1/2"	2,320 PSI	9,280 PSI	5 ft	NPT(f) 1/2" x NPT(f) 1/2"
241406	1/2"	2,320 PSI	9,280 PSI	6 ft	NPT(f) 1/2" x NPT(f) 1/2"
241407	1/2"	2,320 PSI	9,280 PSI	7 ft	NPT(f) 1/2" x NPT(f) 1/2"
241408	1/2"	2,320 PSI	9,280 PSI	8 ft	NPT(f) 1/2" x NPT(f) 1/2"
241409	1/2"	2,320 PSI	9,280 PSI	9 ft	NPT(f) 1/2" x NPT(f) 1/2"
241410	1/2"	2,320 PSI	9,280 PSI	10 ft	NPT(f) 1/2" x NPT(f) 1/2"
241415	1/2"	2,320 PSI	9,280 PSI	15 ft	NPT(f) 1/2" x NPT(f) 1/2"
241420	1/2"	2,320 PSI	9,280 PSI	20 ft	NPT(f) 1/2" x NPT(f) 1/2"

## CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
241503	1/2"	2,320 PSI	9,280 PSI	3 ft	NPT(m) 1/2" x NPT(m) 1/2"
241504	1/2"	2,320 PSI	9,280 PSI	4 ft	NPT(m) 1/2" x NPT(m) 1/2"
241505	1/2"	2,320 PSI	9,280 PSI	5 ft	NPT(m) 1/2" x NPT(m) 1/2"
241506	1/2"	2,320 PSI	9,280 PSI	6 ft	NPT(m) 1/2" x NPT(m) 1/2"
241507	1/2"	2,320 PSI	9,280 PSI	7 ft	NPT(m) 1/2" x NPT(m) 1/2"
241508	1/2"	2,320 PSI	9,280 PSI	8 ft	NPT(m) 1/2" x NPT(m) 1/2"
241509	1/2"	2,320 PSI	9,280 PSI	9 ft	NPT(m) 1/2" x NPT(m) 1/2"
241510	1/2"	2,320 PSI	9,280 PSI	10 ft	NPT(m) 1/2" x NPT(m) 1/2"
241515	1/2"	2,320 PSI	9,280 PSI	15 ft	NPT(m) 1/2" x NPT(m) 1/2"
241520	1/2"	2,320 PSI	9,280 PSI	20 ft	NPT(m) 1/2" x NPT(m) 1/2"

### FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/2" THREAD FOR 3/8" HOSE
  - 1/2" THREAD FOR 3/4" HOSE
  - 3/4" THREAD FOR 1/2" HOSE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE



#### Approximately Weight per Foot

3/8"	1/2"	3/4"	1"
+ - 3.1 oz	+ - 4.2 oz	+ - 6.1 oz	+ - 9.2 oz

## CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
242203	3/4"	1,520 PSI	6,090 PSI	3 ft	NPT(m) 3/4" x NPT(f) 3/4"
242204	3/4"	1,520 PSI	6,090 PSI	4 ft	NPT(m) 3/4" x NPT(f) 3/4"
242205	3/4"	1,520 PSI	6,090 PSI	5 ft	NPT(m) 3/4" x NPT(f) 3/4"
242206	3/4"	1,520 PSI	6,090 PSI	6 ft	NPT(m) 3/4" x NPT(f) 3/4"
242207	3/4"	1,520 PSI	6,090 PSI	7 ft	NPT(m) 3/4" x NPT(f) 3/4"
242208	3/4"	1,520 PSI	6,090 PSI	8 ft	NPT(m) 3/4" x NPT(f) 3/4"
242209	3/4"	1,520 PSI	6,090 PSI	9 ft	NPT(m) 3/4" x NPT(f) 3/4"
242210	3/4"	1,520 PSI	6,090 PSI	10 ft	NPT(m) 3/4" x NPT(f) 3/4"
242215	3/4"	1,520 PSI	6,090 PSI	15 ft	NPT(m) 3/4" x NPT(f) 3/4"
242220	3/4"	1,520 PSI	6,090 PSI	20 ft	NPT(m) 3/4" x NPT(f) 3/4"

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES &amp; METERS

MANUAL PUMPS

DRAINERS &amp; DISPENSERS

STORAGE &amp; FILTRATION

ACCESSORIES



## FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/2" THREAD FOR 3/8" HOSE
  - 1/2" THREAD FOR 3/4" HOSE
  - 3/4" THREAD FOR 1/2" HOSE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE

### Approximately Weight per Foot

3/8"	1/2"	3/4"	1"
+ - 3.1 oz	+ - 4.2 oz	+ - 6.1 oz	+ - 9.2 oz

## CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
242403	3/4"	1,520 PSI	6,090 PSI	3 ft	NPT(f) 3/4" x NPT(f) 3/4"
242404	3/4"	1,520 PSI	6,090 PSI	4 ft	NPT(f) 3/4" x NPT(f) 3/4"
242405	3/4"	1,520 PSI	6,090 PSI	5 ft	NPT(f) 3/4" x NPT(f) 3/4"
242406	3/4"	1,520 PSI	6,090 PSI	6 ft	NPT(f) 3/4" x NPT(f) 3/4"
242407	3/4"	1,520 PSI	6,090 PSI	7 ft	NPT(f) 3/4" x NPT(f) 3/4"
242408	3/4"	1,520 PSI	6,090 PSI	8 ft	NPT(f) 3/4" x NPT(f) 3/4"
242409	3/4"	1,520 PSI	6,090 PSI	9 ft	NPT(f) 3/4" x NPT(f) 3/4"
242410	3/4"	1,520 PSI	6,090 PSI	10 ft	NPT(f) 3/4" x NPT(f) 3/4"
242415	3/4"	1,520 PSI	6,090 PSI	15 ft	NPT(f) 3/4" x NPT(f) 3/4"
242420	3/4"	1,520 PSI	6,090 PSI	20 ft	NPT(f) 3/4" x NPT(f) 3/4"

## CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
242503	3/4"	1,520 PSI	6,090 PSI	3 ft	NPT(m) 3/4" x NPT(m) 3/4"
242504	3/4"	1,520 PSI	6,090 PSI	4 ft	NPT(m) 3/4" x NPT(m) 3/4"
242505	3/4"	1,520 PSI	6,090 PSI	5 ft	NPT(m) 3/4" x NPT(m) 3/4"
242506	3/4"	1,520 PSI	6,090 PSI	6 ft	NPT(m) 3/4" x NPT(m) 3/4"
242507	3/4"	1,520 PSI	6,090 PSI	7 ft	NPT(m) 3/4" x NPT(m) 3/4"
242508	3/4"	1,520 PSI	6,090 PSI	8 ft	NPT(m) 3/4" x NPT(m) 3/4"
242509	3/4"	1,520 PSI	6,090 PSI	9 ft	NPT(m) 3/4" x NPT(m) 3/4"
242510	3/4"	1,520 PSI	6,090 PSI	10 ft	NPT(m) 3/4" x NPT(m) 3/4"
242515	3/4"	1,520 PSI	6,090 PSI	15 ft	NPT(m) 3/4" x NPT(m) 3/4"
242520	3/4"	1,520 PSI	6,090 PSI	20 ft	NPT(m) 3/4" x NPT(m) 3/4"

## FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/2" THREAD FOR 3/8" HOSE
  - 1/2" THREAD FOR 3/4" HOSE
  - 3/4" THREAD FOR 1/2" HOSE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE



### Approximately Weight per Foot

3/8"	1/2"	3/4"	1"
+ - 3.1 oz	+ - 4.2 oz	+ - 6.1 oz	+ - 9.2 oz

## CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
243203	1"	1,280 PSI	5,075 PSI	3 ft	NPT(m) 1" x NPT(f) 1"
243204	1"	1,280 PSI	5,075 PSI	4 ft	NPT(m) 1" x NPT(f) 1"
243205	1"	1,280 PSI	5,075 PSI	5 ft	NPT(m) 1" x NPT(f) 1"
243206	1"	1,280 PSI	5,075 PSI	6 ft	NPT(m) 1" x NPT(f) 1"
243207	1"	1,280 PSI	5,075 PSI	7 ft	NPT(m) 1" x NPT(f) 1"
243208	1"	1,280 PSI	5,075 PSI	8 ft	NPT(m) 1" x NPT(f) 1"
243209	1"	1,280 PSI	5,075 PSI	9 ft	NPT(m) 1" x NPT(f) 1"
243210	1"	1,280 PSI	5,075 PSI	10 ft	NPT(m) 1" x NPT(f) 1"
243215	1"	1,280 PSI	5,075 PSI	15 ft	NPT(m) 1" x NPT(f) 1"
243220	1"	1,280 PSI	5,075 PSI	20 ft	NPT(m) 1" x NPT(f) 1"

## CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
243403	1"	1,280 PSI	5,075 PSI	3 ft	NPT(f) 1" x NPT(f) 1"
243404	1"	1,280 PSI	5,075 PSI	4 ft	NPT(f) 1" x NPT(f) 1"
243405	1"	1,280 PSI	5,075 PSI	5 ft	NPT(f) 1" x NPT(f) 1"
243406	1"	1,280 PSI	5,075 PSI	6 ft	NPT(f) 1" x NPT(f) 1"
243407	1"	1,280 PSI	5,075 PSI	7 ft	NPT(f) 1" x NPT(f) 1"
243408	1"	1,280 PSI	5,075 PSI	8 ft	NPT(f) 1" x NPT(f) 1"
243409	1"	1,280 PSI	5,075 PSI	9 ft	NPT(f) 1" x NPT(f) 1"
243410	1"	1,280 PSI	5,075 PSI	10 ft	NPT(f) 1" x NPT(f) 1"
243415	1"	1,280 PSI	5,075 PSI	15 ft	NPT(f) 1" x NPT(f) 1"
243420	1"	1,280 PSI	5,075 PSI	20 ft	NPT(f) 1" x NPT(f) 1"

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



## FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 1/2" THREAD FOR 3/8" HOSE
  - 1/2" THREAD FOR 3/4" HOSE
  - 3/4" THREAD FOR 1/2" HOSE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE

### Approximately Weight per Foot

3/8"	1/2"	3/4"	1"
+ - 3.1 oz	+ - 4.2 oz	+ - 6.1 oz	+ - 9.2 oz

## CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
243503	1"	1,280 PSI	5,075 PSI	3 ft	NPT(m) 1" x NPT(m) 1"
243504	1"	1,280 PSI	5,075 PSI	4 ft	NPT(m) 1" x NPT(m) 1"
243505	1"	1,280 PSI	5,075 PSI	5 ft	NPT(m) 1" x NPT(m) 1"
243506	1"	1,280 PSI	5,075 PSI	6 ft	NPT(m) 1" x NPT(m) 1"
243507	1"	1,280 PSI	5,075 PSI	7 ft	NPT(m) 1" x NPT(m) 1"
243508	1"	1,280 PSI	5,075 PSI	8 ft	NPT(m) 1" x NPT(m) 1"
243509	1"	1,280 PSI	5,075 PSI	9 ft	NPT(m) 1" x NPT(m) 1"
243510	1"	1,280 PSI	5,075 PSI	10 ft	NPT(m) 1" x NPT(m) 1"
243511	1"	1,280 PSI	5,075 PSI	15 ft	NPT(m) 1" x NPT(m) 1"
243512	1"	1,280 PSI	5,075 PSI	20 ft	NPT(m) 1" x NPT(m) 1"

## CONTROL HANDLE - HIGH-FLOW WITH RIGID SPOUT



### TECHNICAL DATA

SKU	250275
HANDLE	250270 - 1" NPT(f) Handle
SPOUT	250271 - Rigid Spout
INLET	1" NPT(f) with Swivel
FLOW RATE	Up to 15 GPM
MAX. WORKING PRESSURE	1,000 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Mining
- Fleet service facilities
- Oil transfer
- Farm/Agriculture
- Industrial application
- Heavy-duty dealerships
- Fast lube centers

250275

## CONTROL HANDLE - HIGH-FLOW WITH FLEXIBLE SPOUT



### TECHNICAL DATA

SKU	250277
HANDLE	250270 - 1" NPT(f) Handle
SPOUT	250272 - Flexible Spout
INLET	1" NPT(f) with Swivel
FLOW RATE	Up to 15 GPM
MAX. WORKING PRESSURE	1,000 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Mining
- Fleet service facilities
- Oil transfer
- Farm/Agriculture
- Industrial application
- Heavy-duty dealerships
- Fast lube centers

250277

## CONTROL HANDLE - HIGH-FLOW WITH RIGID SPOUT AND METER



### TECHNICAL DATA

SKU	202301
BATTERY	2 x AAA
INLET	3/4" NPT(f) with Swivel
FLOW RATE	Up to 15 GPM
MAX. WORKING PRESSURE	1,000 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Mining
- Fleet service facilities
- Oil transfer
- Farm/Agriculture
- Industrial application
- Heavy-duty dealerships
- Fast lube centers

202301

PUMPS  
KITS  
HOSE REELS  
HOSES  
NOZZLES & METERS  
MANUAL PUMPS  
DRAINERS & DISPENSERS  
STORAGE & FILTRATION  
ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**260062**

\* Due to the viscosity, to use with Diesel the calibration must be redone.



## DIGITAL PRESET OIL CONTROL HANDLE

### TECHNICAL DATA

SKU	260062
FLOW RATE	Up to 8 GPM
MAX. WORKING PRESSURE	1,000 PSI
INLET	1/2" NPT(f) with Swivel
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MIN. PRESET QTY.	0.10 Unit
MAX. PRESET QTY.	99.9 Unit
MAX. VISCOSITY	5,000 CST
WATER RESISTANCE	IP55
MEASURING SYSTEM	Oval Gear

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application



**202103**



## MECHANICAL PRESET OIL CONTROL HANDLE

### TECHNICAL DATA

SKU	202103
FLOW RATE	Up to 8 GPM
MAX. WORKING PRESSURE	1,450 PSI
INLET	1/2" NPT(f) with Swivel
OUTLET	1/2" NPT(f)
MEASURING DIAL	60 Quarts
ACCURACY	+/- 0.65%

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application



**202102**



## MECHANICAL PRESET OIL CONTROL HANDLE

### TECHNICAL DATA

SKU	202102
FLOW RATE	Up to 8 GPM
MAX. WORKING PRESSURE	1,450 PSI
INLET	1/2" NPT(f) with Swivel
OUTLET	1/2" NPT(f)
MEASURING DIAL	12 Quarts
ACCURACY	+/- 0.65%

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application

## DIGITAL OIL CONTROL HANDLE FLEXIBLE SPOUT

### TECHNICAL DATA

SKU	250250
FLOW RATE	Up to 9.2 GPM
SPOUT	250258 - Flexible Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+/- 0.5%
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MAX. WORKING PRESSURE	1,015 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application

## DIGITAL OIL CONTROL HANDLE RIGID SPOUT

### TECHNICAL DATA

SKU	250251
FLOW RATE	Up to 9.2 GPM
SPOUT	250002 - Rigid Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+/- 0.5%
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MAX. WORKING PRESSURE	1,015 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application

## MECHANICAL OIL CONTROL HANDLE - FLEXIBLE SPOUT

### TECHNICAL DATA

SKU	250422
FLOW RATE	Up to 7 GPM
SPOUT	250001 - Flexible Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+/- 1%
MAX. WORKING PRESSURE	1,015 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application



250250



250251



250422

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250421**



## MECHANICAL OIL CONTROL HANDLE - RIGID SPOUT

### TECHNICAL DATA

SKU	250421
FLOW RATE	Up to 7 GPM
SPOUT	250002 - RIGID Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+/- 1%
MAX. WORKING PRESSURE	1,015 PSI

#### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application



**250252**



## OIL CONTROL HANDLE FLEXIBLE SPOUT

### TECHNICAL DATA

SKU	250252
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel



**250253**



## OIL CONTROL HANDLE RIGID SPOUT

### TECHNICAL DATA

SKU	250253
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel



**250404**



## OIL CONTROL HANDLE FLEXIBLE SPOUT

### TECHNICAL DATA

SKU	250404
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel



**250405**



## OIL CONTROL HANDLE RIGID SPOUT

### TECHNICAL DATA

SKU	250405
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel

## OIL CONTROL HANDLE

### TECHNICAL DATA

SKU	250270
FLOW RATE	Up to 15 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1" NPT(f) with Swivel
OUTLET	1/2" NPT(f)



250270

## OIL CONTROL HANDLE

### TECHNICAL DATA

SKU	250259
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel
OUTLET	1/2" NPT(f)



250259

## OIL CONTROL HANDLE

### TECHNICAL DATA

SKU	250401
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel
OUTLET	1/2" NPT(f)



250401

## 1/2" RIGID SPOUT - AUTO. TIP

### TECHNICAL DATA

SKU	250271
INLET	1/2" NPT(m)



250271

## 1/2" FLEXIBLE SPOUT - AUTO TIP

### TECHNICAL DATA

SKU	250272
INLET	1/2" NPT(m)



250272

## 1/2" FLEXIBLE SPOUT - AUTO. TIP

### TECHNICAL DATA

SKU	250001
INLET	1/2" NPT(m)



250001

## 1/2" RIGID SPOUT - AUTO. TIP

### TECHNICAL DATA

SKU	250002
INLET	1/2" NPT(m)



250002

## 1/2" FLEXIBLE SPOUT - AUTO. TIP

### TECHNICAL DATA

SKU	250258
INLET	1/2" NPT(m)



250258

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250000**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



## DIGITAL OIL METER - 1/2"

### TECHNICAL DATA

SKU	250000
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	1 x Lithium CR123A
MAX. WORKING TEMP.	122° F



**260061**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



## DIGITAL OIL METER - 1/2"

### TECHNICAL DATA

SKU	260061
FLOW RATE	Up to 7.8 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	2 x AAA
MAX. WORKING TEMP.	122° F



**250419**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



## MECHANICAL OIL METER - 1/2"

### TECHNICAL DATA

SKU	250419
FLOW RATE	Up to 7.8 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons
MEASURING SYSTEM	Oval Gear
MAX. WORKING TEMP.	122° F



**250505**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Mining
- Industrial application



## DIGITAL OIL METER - 3/4"

### TECHNICAL DATA

SKU	250505
FLOW RATE	Up to 21 GPM
MAX. WORKING PRESSURE	725 PSI
INLET / OUTLET	3/4" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	1 x CR2 (3V)
MAX. WORKING TEMP.	122° F

## MANUAL OIL PUMP - LEVER ACTION - FOR 5 GAL PAIL

OIL 0

### Product Brief

Pump designed for transferring transmission differentials & heavier oils. Zinc plated pump body with aluminum die cast head & adjusting flange.

Powder coated steel drum cover. Wear resistant brass piston rings fitted onto zinc die cast piston

Complete with 4 ft fuel resistant soft PVC hose with nozzle for efficient discharge.

### WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR, PVC.

### RECOMMENDED USE

Transmission differentials & heavier oils.

### DO NOT USE

Water based & other corrosive fluids.

### TECHNICAL DATA

SKU	201005
FLOW RATE	Up to 2.2 oz per stroke
HOSE	PVC hose 4 ft

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



5 GAL



201005

## MANUAL OIL PUMP - LEVER ACTION - FOR 16 GAL DRUM

OIL 0

### Product Brief

Pump designed for transferring transmission differentials & heavier oils. Zinc plated pump body with aluminum die cast head & adjusting flange.

Powder coated steel drum cover. Wear resistant brass piston rings fitted onto zinc die cast piston

Complete with 4 ft fuel resistant soft PVC hose with nozzle for efficient discharge.

### WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR, PVC.

### RECOMMENDED USE

Transmission differentials & heavier oils.

### DO NOT USE

Water based & other corrosive fluids.

### TECHNICAL DATA

SKU	201016
FLOW RATE	Up to 2.2 oz per stroke
HOSE	PVC hose 4 ft

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



16 GAL



201016

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**201001**

OIL O

ANTIFREEZE AN

DIESEL DI

KEROSENE K

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



## MANUAL OIL PUMP - LEVER ACTION - FOR 55 GAL DRUM

### Product Brief

Most popular pump engineered for professional use; with premium powder-coated steel pump body and with a ribbed section aluminum die-cast pump head for maximum strength. Built-in 1.1/2" and 2" bung for use on drums with either opening. Plated steel lever handle with rubber grip for convenience. Wear-resistant brass piston rings fitted onto zinc die-cast piston. Comes complete with curved metal spout and telescopic suction tube for use on 16 gallon - 55 gallons drums.

### WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR.

### RECOMMENDED USE

Antifreeze, solvents, thinners, automotive additives, oil based fluids & other non corrosive liquids.

### DO NOT USE

Gasoline, water based, and other corrosive fluids.

### TECHNICAL DATA

SKU	201001
FLOW RATE	Up to 10 oz per stroke



**300401**

OIL O

GASOLINE G

DIESEL DI

KEROSENE K

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



## MANUAL OIL PUMP - LEVER ACTION - FOR 55 GAL DRUM

### Product Brief

An extremely rugged and strong all steel pump designed specifically for use with Diesel and E85 fuels. Constructed from selected materials which are compatible with Bio Diesel and E85 fuel. Fracture proof design with steel pump head and bung. Extra-long pump body makes it easy to place refill containers on the drum for convenient dispensing. Comes complete with curved metal spout and telescopic suction tube for use on 16 gallon - 55 gallons drums.

### WETTED COMPONENTS

Steel, Viton & PTFE.

### RECOMMENDED USE

Oil based fluids, Bio Diesel & E85 fuels.

### DO NOT USE

With Corrosive fluids, solvents, acids, alkalis etc.

### TECHNICAL DATA

SKU	300401
FLOW RATE	Up to 10 oz per stroke

## MANUAL OIL PUMP ROTARY - FOR 55 GAL DRUM

### Product Brief

The most popular pump used worldwide. This Rotary Pump is superior with features such as Dual Directional Operation which allows the pump to empty and refill containers. Extremely Heavy Duty; this pump's body is sturdy cast iron with precisely machined cast iron vanes for a better draw and smoother delivery. Fits 16 gallons to 55 gallons drum. Comes complete with a suction tube, 2" cast iron bung adaptor and discharge spout.

### WETTED COMPONENTS

Steel, Cast Iron, NBR.

### RECOMMENDED USE

For dispensing Diesel, Kerosene, Heating Oils, Motor Oils, Lubricating Oils (up to SAE 90), and other non-corrosive fluids.

### DO NOT USE

With water based fluids, Antifreeze, Solvents, Acids, and Gasoline.

### TECHNICAL DATA


SKU	201101
FLOW RATE	Up to 1.3 GAL per 5 strokes



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :

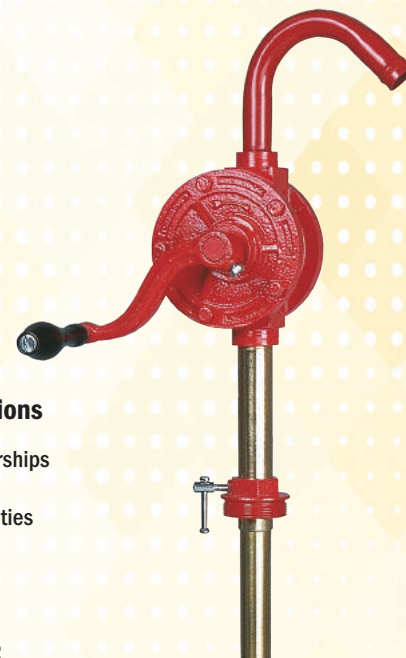

**201101**

## MANUAL OIL PUMP ROTARY - PROFESSIONAL FOR 55 GAL DRUM

### Product Brief

Rotary barrel pump with aluminum die-cast pump body, heavy-duty zinc die-cast rotor and vanes ideal for use in industrial and automotive applications. Includes a 2" Cast Iron bung adaptor and die-cast aluminum handle with security locking latch. Complete with a 3-pc threaded suction tube for use on 16 gallons to 55 gallons drum.

### WETTED COMPONENTS

Aluminum, Zinc, Steel, NBR/Viton & PVC.

### RECOMMENDED USE

Gasoline, Diesel fuel, Kerosene, & Lubricating oils up to SAE 60.

### DO NOT USE

With Corrosive liquids, Solvents, Acids, Alkalis etc.

### TECHNICAL DATA

SKU	201201
FLOW RATE	Up to 2.2 oz per stroke



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**201201**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**300201**



#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### SUITABLE FOR :



## MANUAL OIL PUMP - ROTARY FOR 55 GAL DRUM

### Product Brief

The industry standard rotary pumps; these are by far the heaviest duty pumps, ideal for tough outdoor use in extreme weather conditions. Solid cast iron construction, fully CNC machined to close tolerances. Pump handle rotates a high-quality sintered powder metal, 3 vane rotors inside a highly finished pumping chamber. Graphite Vanes are self-lubricating and non-wearing. High-quality graphite seal, self-priming, supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 16 gallon - 55 gallons drums.

#### WETTED COMPONENTS

Cast Iron, Steel, Graphite, Paper, Polypropylene.

#### RECOMMENDED USE

Petroleum base fluids, Diesel & Kerosene.

#### DO NOT USE

With water based fluids.

#### TECHNICAL DATA

SKU	300201
FLOW RATE	Up to 10 GPM
HOSE	8 ft - 3/4" with Spout



**300301**



#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### SUITABLE FOR :



## MANUAL OIL PUMP - ROTARY FOR 55 GAL DRUM

### Product Brief

The industry standard rotary pumps; these are by far the heaviest duty pumps, ideal for tough outdoor use in extreme weather conditions. Solid cast iron construction, fully CNC machined to close tolerances. Pump handle rotates a high-quality sintered powder metal, 3 vane rotors inside a highly finished pumping chamber. Graphite Vanes are self-lubricating and non-wearing. High-quality graphite seal, self-priming, supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 16 gallon - 55 gallons drums.

#### WETTED COMPONENTS

Cast Iron, Steel, Graphite, Paper, Polypropylene.

#### RECOMMENDED USE

Petroleum base fluids, Diesel & Kerosene.

#### DO NOT USE

With water based fluids.

#### TECHNICAL DATA

SKU	300301
FLOW RATE	Up to 10 GPM

## MANUAL OIL PUMP ROTARY - FOR 55 GAL DRUM

### Product Brief

A range of special applications pump designed for use with fluids that cannot be pumped using a regular cast-iron or steel pump. Pump body and handle are constructed using glass-filled Polypropylene'. Vanes made of Ryton. Complete with 3-pc threaded suction tube for use on 16 gallons to 55 gallons drums.

### WETTED COMPONENTS

Polypropylene, Ryton, Viton.

### RECOMMENDED USE

For Lubricating oils, Acids, Chemicals, Water based media, antifreeze, detergents, Urea, Adblue, DEF, Benzene, Glycerine.

### DO NOT USE

Acetone, Lacquer, Mineral Oils, Solvents, Turpentine.

### TECHNICAL DATA

<b>SKU</b>	201501
<b>FLOW RATE</b>	Up to 1.3 GAL per 10 strokes



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**201501**

## MANUAL OIL PUMP DOUBLE DIAPHRAGM FOR 55 GAL DRUM

### Product Brief

Heavy-Duty Fuel Transfer pump, ideal for use where compressed air/electricity is not easily available such as farms or ranches, construction sites, boat, etc. Stainless Steel Piston and fuel resistant nitrile rubber diaphragm Include a 2" die cast bung adaptor and extra heavy-duty steel handle with security locking latch. Pump inlet fitted with easy to clean wire mesh screen. Complete with a telescopic suction tube with a non-return valve to use on 16 gallons to 55 gallons drum.

### WETTED COMPONENTS

Aluminum, Steel, Stainless Steel, Poly Acetal & NBR.

### RECOMMENDED USE

Gasoline, Diesel fuel, Fuel Oil, Motor Oil & other light petroleum products.

### DO NOT USE

With Corrosive liquids, solvents, acids, alkalis etc.

### TECHNICAL DATA


<b>SKU</b>	300101
<b>FLOW RATE</b>	Up to 1 GAL per 5 strokes



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :

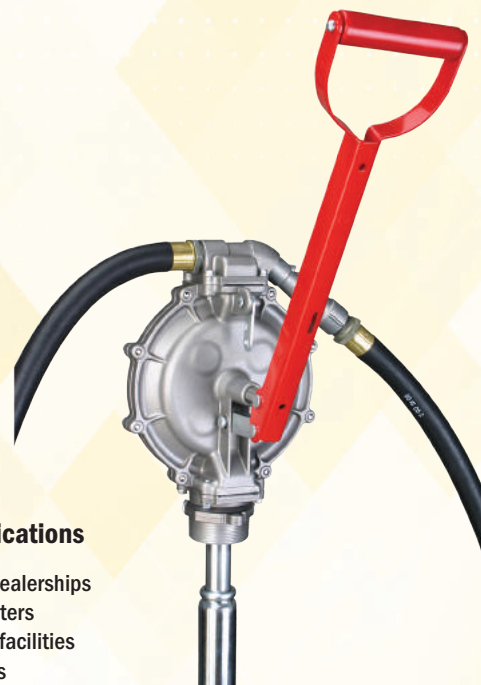

**300101**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

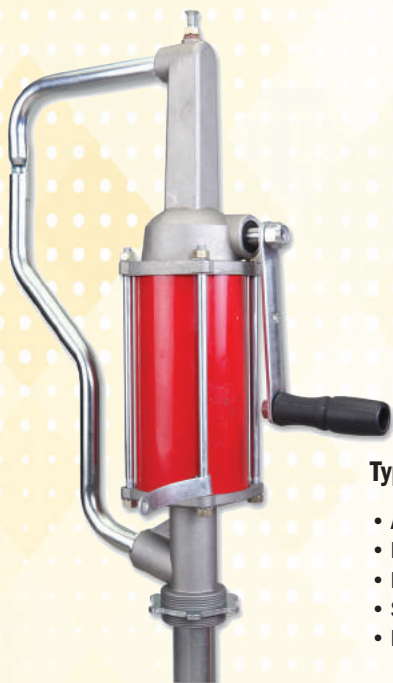

**201801**



#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### SUITABLE FOR :



## MANUAL OIL PUMP QUART / STROKE FOR 55 GAL DRUM

### Product Brief

A heavy-duty and economical way to dispense the exact quantity of fluid per stroke. Extremely useful in applications requiring metered delivery, the pump works on a precision rack and pinion mechanism. The pump has a built-in 2" Bung Adaptor and comes complete with a telescopic suction tube for use with 16 gallons - 55 gallons drum. Spring-loaded drain back tube for overflowed fluid, a lockable handle which allows the pump to be padlocked when it is not in use, lock nut for positioning the pump outlet in any direction.

#### WETTED COMPONENTS

Steel, Aluminum, Nitrile Rubber & Acetal.

#### RECOMMENDED USE

Gear & Lube Oil, Petroleum based fluid, Diesel & Kerosene.

#### DO NOT USE

With water based & other corrosive fluids.

#### TECHNICAL DATA

SKU	201801
FLOW RATE	Up to 1 Quart per stroke



**201301**



#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### SUITABLE FOR :



## MANUAL OIL PUMP VERTICAL LIFT FOR 55 GAL DRUM

### Product Brief

Self-priming high-volume vertical lift pump for use with petroleum-based fluids. Steel construction with aluminum die-cast head, steel plunger rod and PTFE seals. The piston is made from zinc with wear-resistant brass piston rings. Complete with 2" cast iron bung adaptor tube with strainer for use with 55 gallons drums.

#### WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass & PTFE.

#### RECOMMENDED USE

High viscosity petroleum based fluids, lacquer thinners.

#### DO NOT USE

With Gasoline, water based & other corrosive fluids.

#### TECHNICAL DATA

SKU	201301
FLOW RATE	Up to 26 oz per stroke

## MANUAL OIL PUMP FOR 55 GAL DRUM

### Product Brief

Self-priming vertical lift pump designed for use with antifreeze, detergents, etc. Polypropylene construction with steel plunger rod and Viton seals. Complete with 2" polypropylene bung adaptor for use on 55 gallons drum.

### WETTED COMPONENTS

Polypropylene, Steel & Viton.

### RECOMMENDED USE

For Lubricating oils, Antifreeze, detergents, windshield fluids, glycerine, mild acids, petroleum based fluids.

### DO NOT USE

With strong acids, lacquers, acetone, gasoline.

### TECHNICAL DATA

SKU	201601
FLOW RATE	Up to 14 oz per 1 stroke



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**201601**

## MANUAL OIL PUMP FOR 55 GAL DRUM

### Product Brief

The self-priming vertical lift pump is designed primarily for use with lacquer thinners, urea, AdBlue, DEF, etc. Nylon construction with stainless steel plunger rod and PTFE seals. Complete with 2" polypropylene bung adapter and a suction tube with a non-return valve to use on 55 gallons drum.

### WETTED COMPONENTS

Nylon, Polypropylene, Stainless Steel & PTFE.

### RECOMMENDED USE

With motor Oil, lacquer thinners, Acetone, Antifreeze, Brake Kleen, Detergents, Glycerine, Water, Weed Killer, mild acids, AdBlue, Urea, DEF, petroleum based fluids.

### DO NOT USE

With strong acids, bleach, gasoline.

### TECHNICAL DATA

SKU	201701
FLOW RATE	Up to 14 oz per stroke



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**201701**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**201402**

## MANUAL OIL PUMP FOR 5 GAL PAIL

### Product Brief

Downstroke operation with fluid discharge when pushing the handle down. Enhanced ease of use and reduced fatigue especially when pumping heavy fluids. It additionally reduces pull out stress on the pump bung. Heavy-duty steel suction tube, with the pump head made from high-density polyethylene.

### WETTED COMPONENTS

Steel, Aluminum, Polyethylene, Polypropylene Co Polymer, High Nitrile Rubber, PVC & Acetal.

### RECOMMENDED USE

Engine oils, gear oils, Diesel and light fuel oil.

### DO NOT USE

With water based & other corrosive fluids.

### TECHNICAL DATA

SKU	201402
FLOW RATE	Up to 1 Quart per stroke

## TRANSFER GUN

### Product Brief

Dual direction transfer gun draws in and pumps out the liquid in a single stroke. Suction head and piston have an aluminum construction and use Viton piston rings.

### RECOMMENDED USE

Fuel oils, Mineral oils, Synthetic & Biological oils, Petrol, Cooling liquids, Water, Antifreeze, Spirits & Brake fluids.

### TECHNICAL DATA

SKU	200701
CAPACITY	12 oz
HOSE	2 pieces of 4 ft clear vinyl hose



**200701**

## SUCTION GUN

### TECHNICAL DATA

SKU	200601
CAPACITY	16 oz
RECOMMENDED USE	Non corrosive liquids
HOSE	12" clear vinyl hose



**200601**

## OIL SAMPLER VACUUM PUMP NYLON HEAD OIL 0

### Product Brief

The oil sampler vacuum pump is designed primarily for collecting oil samples, featured with a pressure release valve, avoids contamination during the sampling process, making it easier, cleaner and safer.

### DO NOT USE

With strong acids, lacquers, acetone , gasoline.

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Mining
- Industrial application
- Farm/Agriculture
- Service shops



### TECHNICAL DATA

SKU	256591
RELEASE VALVE	Yes

\* Container and hose are not included but they are available separately

## 256591

## OIL SAMPLER VACUUM PUMP CLEAR ACRYLIC HEAD OIL 0

### Product Brief


The oil sampler vacuum pump is designed primarily for collecting oil samples, featured with a pressure release valve, avoids contamination during the sampling process, making it easier, cleaner and safer.

### DO NOT USE

With strong acids, lacquers, acetone , gasoline.

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Mining
- Industrial application
- Farm/Agriculture
- Service shops



### TECHNICAL DATA

SKU	256599
RELEASE VALVE	No

\* Container and hose are not included but they are available separately

## 256599

## OIL SAMPLER CLEAR BOTTLE

### TECHNICAL DATA

SKU	256592
TO USE WITH	256591 and 256599



## 256592

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**253602**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

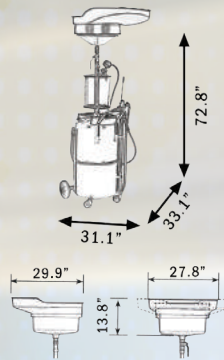

## AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 23.8 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	253602
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	6 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	17.2 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	90 lbs




**250808**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

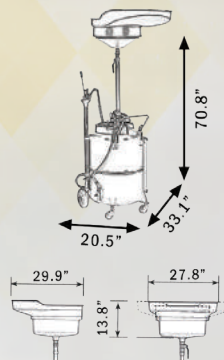

## AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 31.7 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	250808
TANK CAPACITY	31.7 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	5.8 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	23.8 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	75 lbs

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use it with brake oils, fuels, inflammable and corrosive liquids.**

## AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 23.8 GAL TANK CAPACITY


### TECHNICAL DATA

SKU	250807
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	6 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	17.2 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	81 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

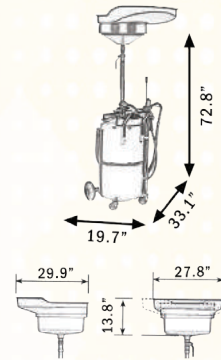

**250807**

## AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 17.2 GAL TANK CAPACITY


### TECHNICAL DATA

SKU	253605
TANK CAPACITY	17.2 GAL
BOWL CAPACITY	4 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	5 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	11.9 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	67 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

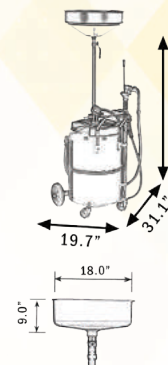

**253605**

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use it with brake oils, fuels, inflammable and corrosive liquids**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**250814**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

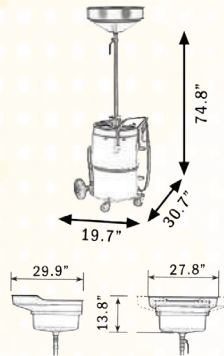

## OIL DRAIN UNIT WITH RECOVERY BASIN 31.7 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	250814
TANK CAPACITY	31.7 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	66 lbs




**253603**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

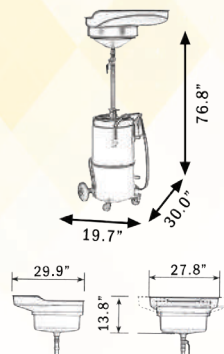

## OIL DRAIN UNIT WITH RECOVERY BASIN 23.8 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	253603
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	72 lbs

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use it with brake oils, fuels, inflammable and corrosive liquids**

## OIL DRAIN UNIT WITH RECOVERY BASIN 23.8 GAL TANK CAPACITY


### TECHNICAL DATA

SKU	253609
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	4 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	65 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

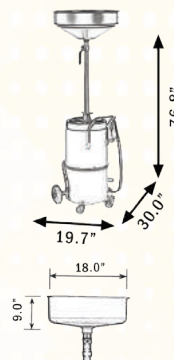

**253609**

## OIL DRAIN UNIT WITH RECOVERY BASIN 17.2 GAL TANK CAPACITY


### TECHNICAL DATA

SKU	253607
TANK CAPACITY	17.2 GAL
BOWL CAPACITY	4 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	60 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

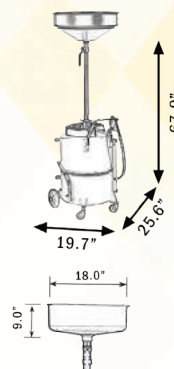

**253607**

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use it with brake oils, fuels, inflammable and corrosive liquids**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




\* Drum not included.

## 250815



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

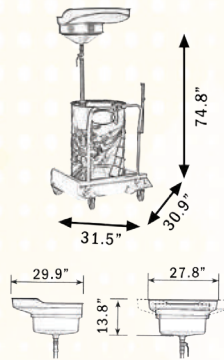

## PORTABLE OIL DRAIN UNIT WITH RECOVERY BASIN

### TECHNICAL DATA

SKU	250815
USED WITH	55 Gal Drum
BOWL CAPACITY	5.3 GAL
TROLLEY	250066 - Four Wheels Trolley
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
BUNG ADAPTOR	2" BSP(m)
WEIGHT	100 lbs




## 203609



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## ROTOMOLDED OIL DRAIN UNIT WITH 31.7 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	203609
TANK CAPACITY	31.7 GAL
BOWL CAPACITY	5.3 GAL
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	No
OUTLET	1/2" Quick Connec
WEIGHT	55 lbs

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use it with brake oils, fuels, inflammable and corrosive liquids**

## OIL DRAIN UNIT WITH RECOVERY BASIN


### TECHNICAL DATA

SKU	250817
USED WITH	55 Gal Drum
BOWL CAPACITY	5.3 GAL
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
BUNG ADAPTOR	BSP(m)
WEIGHT	18 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



\* Drum not included.  
**250817**

## OIL DRAIN UNIT WITH RECOVERY BASIN



### TECHNICAL DATA

SKU	250816
USED WITH	55 Gal Drum
BOWL CAPACITY	4 GAL
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
BUNG ADAPTOR	BSP(m)
WEIGHT	11 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

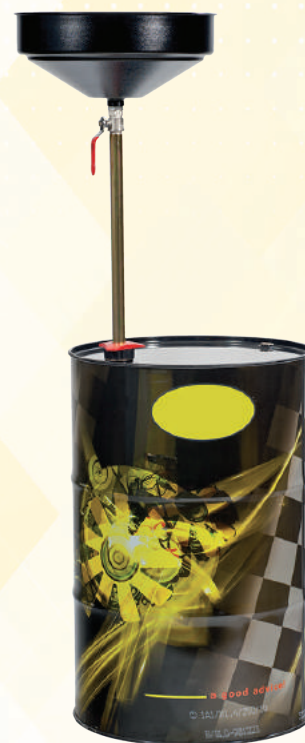

\* Drum not included.  
**250816**

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use it with brake oils, fuels, inflammable and corrosive liquids**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250811**

### Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## AIR OPERATED OIL SUCTION WITH PRE-CHAMBER 31.7 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	250811
TANK CAPACITY	31.7 GAL
MAX. SUCTION CAPACITY	23.8 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	69 lbs



### Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## AIR OPERATED OIL SUCTION WITH PRE-CHAMBER 23.8 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	253604
TANK CAPACITY	23.8 GAL
MAX. SUCTION CAPACITY	17.2 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	73 lbs



**253604**

### Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## AIR OPERATED OIL SUCTION WITH PRE-CHAMBER 17.2 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	253606
TANK CAPACITY	17.2 GAL
MAX. SUCTION CAPACITY	11.9 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	67 lbs



**253606**

The air-operated oil suction drainers are ideal for a rapid motor oil change. The procedure happens by aspiration through the probes. Pressurization allows for regular work mechanism without the necessity of continuous flow of compressed air, an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck up to 2/3 of the tank capacity. The pre-chamber allows the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use with brake oils, fuels, inflammable and corrosive liquids**

## AIR OPERATED OIL SUCTION/ASPIRATOR 31.7 GAL TANK CAPACITY


### TECHNICAL DATA

SKU	250805
TANK CAPACITY	31.7 GAL
MAX. SUCTION CAPACITY	23.8 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	59 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**250805**

## AIR OPERATED OIL SUCTION/ASPIRATOR 23.8 GAL TANK CAPACITY


### TECHNICAL DATA

SKU	250803
TANK CAPACITY	23.8 GAL
MAX. SUCTION CAPACITY	17.2 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	64 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**250803**

## AIR OPERATED OIL SUCTION/ASPIRATOR 17.2 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	253608
TANK CAPACITY	17.2 GAL
MAX. SUCTION CAPACITY	11.9 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	56 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**253608**

The air-operated oil suction drainers are ideal for a rapid motor oil change. The procedure happens by aspiration through the probes. Pressurization allows for regular work mechanism without the necessity of continuous flow of compressed air, an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck up to 2/3 of the tank capacity. The pre-chamber allows the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use with brake oils, fuels, inflammable and corrosive liquids**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**250802**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## AIR OPERATED OIL SUCTION/ASPIRATOR 6.3 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	250802
TANK CAPACITY	6.3 GAL
MAX. SUCTION CAPACITY	4.2 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
EMPTYING SYSTEM	Air Operated
HOSE EMPTYING LENGTH	6 ft
WEIGHT	30 lbs




**253601**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## AIR OPERATED OIL SUCTION/ASPIRATOR 6.3 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	253601
TANK CAPACITY	6.3 GAL
MAX. SUCTION CAPACITY	4.2 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
EMPTYING SYSTEM	Manual
HOSE EMPTYING LENGTH	(Without Hose)
WEIGHT	28 lbs

The air-operated oil suction drainers are ideal for a rapid motor oil change. The procedure happens by aspiration through the probes. Pressurization allows for regular work mechanism without the necessity of continuous flow of compressed air, an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck up to 2/3 of the tank capacity. The pre-chamber allows the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

**Do not use with brake oils, fuels, inflammable and corrosive liquids**

## AIR OPERATED OIL SUCTION/ASPIRATOR 31.7 GAL TANK CAPACITY

### TECHNICAL DATA


SKU	250903
TANK CAPACITY	31.7 GAL
OUTLET (EMPTYING)	1:1 Pump - 3/4" Outlet Thread
ADJUSTABLE WHEELS	From 31.5" to 47.2"
WEIGHT	95 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops

## 250903



## AIR OPERATED OIL SUCTION/ASPIRATOR 31.7 GAL TANK CAPACITY

### TECHNICAL DATA


SKU	255001
TANK CAPACITY	31.7 GAL
OUTLET (EMPTYING)	3/4" NPT(f) Ball Valve
ADJUSTABLE WHEELS	From 31.5" to 47.2"
WEIGHT	81 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops

## 255001



## AIR OPERATED OIL SUCTION/ASPIRATOR 23.8 GAL TANK CAPACITY

### TECHNICAL DATA


SKU	255005
TANK CAPACITY	23.8 GAL
OUTLET (EMPTYING)	3/4" NPT(f) Ball Valve
ADJUSTABLE WHEELS	From 31.5" to 47.2"
WEIGHT	79 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops

## 255005



Exhausted oil wheeled drain units are suitable for draining motor oils, transmissions, antifreeze, and non-corrosive fluids. The tanks are equipped with breakwater, anti-reflux grate and anti-splash grid, ideal for draining used oil filters. Wasted/Exhausted oil can be transferred from the tank/drainers to the properly wasted oil tank.

PUMPS  
KITS  
HOSE REELS  
HOSES  
NOZZLES & METERS  
MANUAL PUMPS  
DRAINERS & DISPENSERS  
STORAGE & FILTRATION  
ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

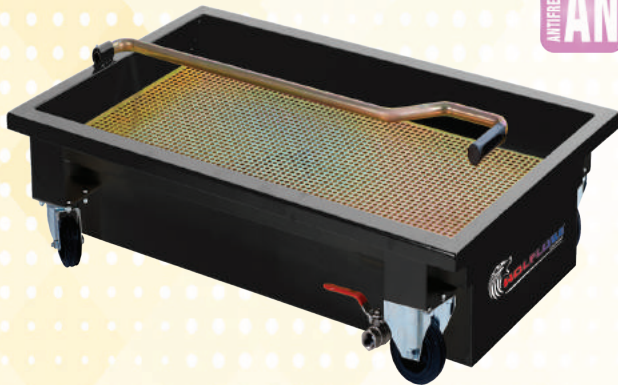

**255002**




## WHEELED OIL DRAIN UNIT 53 GAL CAPACITY

### TECHNICAL DATA


SKU	255002
TANK CAPACITY	53 GAL
OUTLET	3/4" NPT(f) Ball Valve
WHEELS	4 Wheels (2 with swivel)
WEIGHT	188 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

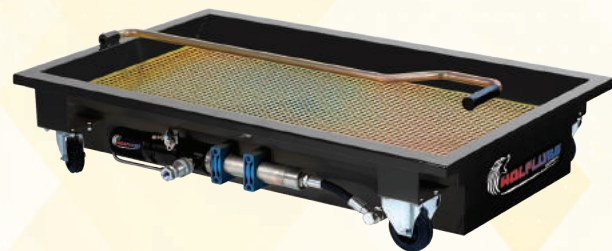

**250906**



## WHEELED OIL DRAIN UNIT 31.7 GAL CAPACITY

### TECHNICAL DATA

SKU	250906
TANK CAPACITY	31.7 GAL
OUTLET	1:1 Pump - 3/4" Outlet Thread
WHEELS	4 Wheels (2 with swivel)
WEIGHT	99 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

Exhausted oil wheeled drain units are suitable for draining motor oils, transmissions, antifreeze, and non-corrosive fluids. The tanks are equipped with breakwater, anti-reflux grate and anti-splash grid, ideal for draining used oil filters. Wasted/Exhausted oil can be transferred from the tank/drainer to the properly wasted oil tank.

## WHEELED OIL DRAIN UNIT 31.7 GAL CAPACITY

### TECHNICAL DATA


SKU	255003
TANK CAPACITY	31.7 GAL
OUTLET	3/4" NPT(f) Ball Valve
WHEELS	4 Wheels (2 with swivel)
WEIGHT	85 lbs

#### Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

OIL 0

ANTIFREEZE AN

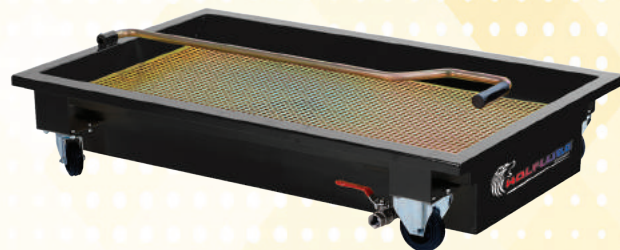

**255003**



## WHEELED OIL DRAIN UNIT 15.9 GAL CAPACITY

### TECHNICAL DATA

SKU	255004
TANK CAPACITY	15.9 GAL
OUTLET	3/4" NPT(f) Ball Valve
WHEELS	4 Wheels (2 with swivel)
WEIGHT	76 lbs

#### Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

OIL 0

ANTIFREEZE AN



**255004**



Exhausted oil wheeled drain units are suitable for draining motor oils, transmissions, antifreeze, and non-corrosive fluids. The tanks are equipped with breakwater, anti-reflux grate and anti-splash grid, ideal for draining used oil filters. Wasted/Exhausted oil can be transferred from the tank/drainers to the properly wasted oil tank.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**254431**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## PORTABLE OIL DISPENSING UNIT - 13.2 GAL CAPACITY

### TECHNICAL DATA

SKU	254431
TANK CAPACITY	13.2 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	10.6 GAL
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
MAX. PRESSURE	116 PSI
WEIGHT	57 lbs

Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.




**254430**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## PORTABLE OIL DISPENSING UNIT - 6.3 GAL CAPACITY

### TECHNICAL DATA

SKU	254430
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	5.1 GAL
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
MAX. PRESSURE	116 PSI
WEIGHT	29 lbs

Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.

## PORTABLE OIL DISPENSING UNIT - 13.2 GAL CAPACITY

### TECHNICAL DATA

SKU	260129
TANK CAPACITY	13.2 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	10.6 GAL
NOZZLE	250404 - Control Handle
HOSE	10 ft
MAX. PRESSURE	116 PSI
WEIGHT	55 lbs


Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.

OIL 0

ANTIFREEZE AN

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



260129

## PORTABLE OIL DISPENSING UNIT - 6.3 GAL CAPACITY

### TECHNICAL DATA

SKU	260130
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	5.1 GAL
NOZZLE	250404 - Control Handle
HOSE	10 ft
MAX. PRESSURE	116 PSI
WEIGHT	27 lbs


Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.

OIL 0

ANTIFREEZE AN

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



260130

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**250901**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## PORTABLE OIL DISPENSING UNIT - 6.3 GAL CAPACITY

### TECHNICAL DATA

SKU	250901
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
NOZZLE	250404 - Control Handle
HOSE	10 ft
WEIGHT	32 lbs

Manual oil dispensers with double-acting manual pump, suitable for high viscosity oils (SAE 15-220). They are recommended for dispensing motor oils, transmissions, differential gears, hydraulic power packs, antifreeze and so on. Do not use with corrosive fluids.




**250503**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## PORTABLE OIL DISPENSING UNIT - 6.3 GAL CAPACITY

### TECHNICAL DATA

SKU	250503
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
WEIGHT	34 lbs

Manual oil dispensers with double-acting manual pump, suitable for high viscosity oils (SAE 15-220). They are recommended for dispensing motor oils, transmissions, differential gears, hydraulic power packs, antifreeze and so on. Do not use with corrosive fluids.

## PORTABLE AIR OPERATED OIL DISPENSING UNIT 17.2 GAL CAPACITY


### TECHNICAL DATA

SKU	253001
TANK CAPACITY	17.2 GAL
TANK MATERIAL	Steel
PUMP	260026 - Air Operated Pump 3:1 - 6.6 GPM
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
WEIGHT	68 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**253001**

## WHEELED OIL DISPENSING UNIT - 4.2 GAL CAPACITY

### TECHNICAL DATA

SKU	250502
TANK CAPACITY	4.2 GAL
TANK MATERIAL	Steel
SPOUT	Rigid 30° end
HOSE	6 ft
WHEELS	Yes
WEIGHT	31 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**250502**

## PORTABLE OIL DISPENSING UNIT - 4.2 GAL CAPACITY

### TECHNICAL DATA

SKU	250801
TANK CAPACITY	4.2 GAL
TANK MATERIAL	Steel
SPOUT	Rigid 30° end
HOSE	6 ft
WHEELS	No
WEIGHT	31 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**250801**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**201205**

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## OIL DISPENSER MANUAL SYSTEM 4.7 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	201205
TANK CAPACITY	4.7 GAL
PUMP	Manual lever pump
SPOUT	Metal curved spout
HOSE	5 ft - 1/2" clear hose
TROLLEY	No
WEIGHT	12 lbs



**201206**

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## OIL DISPENSER MANUAL SYSTEM 4.7 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	201206
TANK CAPACITY	4.7 GAL
PUMP	Manual lever pump
SPOUT	Metal curved spout
HOSE	5 ft - 1/2" clear hose
TROLLEY	Yes
WEIGHT	16 lbs



**201213**

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



## OIL DISPENSER MANUAL SYSTEM 13 GAL TANK CAPACITY

### TECHNICAL DATA

SKU	201213
TANK CAPACITY	13 GAL
PUMP	201001 - Manual lever pump
SPOUT	Metal curved spout
HOSE	5 ft - 1/2" clear hose
TROLLEY	Yes
WEIGHT	24 lbs



## OIL DISPENSER WIRELESS SYSTEM



Printer (Optional)



PC (where Software is installed)

### PC

This is where the management software will be installed. The software will be used to manage user, create orders, check tank level, etc.



### UP TO 8 MASTER KEYPADS

Master keypads are connected to the PCs and are responsible for establishing connection with the additional keypads (dispensing pads).



### UP TO 36 ADDITIONAL KEYPADS (DISPENSING PADS)

Additional keypads or dispensing pads are used to start the orders. They are usually installed in the workplace.



### UP TO 250 PRESET NOZZLES

Wireless preset nozzles will dispense only the amount previously set up/released when the order is created in the software/PC.



### UP TO 16 DIFFERENT PRODUCTS

The system allows you to manage up to 16 different products/fluids, in up to 250 tanks, drums or totes.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**210001**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops

OIL 0

## MASTER KEYPAD WIRELESS SYSTEM

### TECHNICAL DATA

SKU	210001
VOLTAGE	115 V
PRINTER	No - Sold separately
WEIGHT	6 lbs



**210003**

OIL 0

## DISPENSING PADS WIRELESS SYSTEM

### TECHNICAL DATA

SKU	210003
VOLTAGE	115 V
PRINTER	No - Sold separately
WEIGHT	5 lbs



**250416**

OIL 0

## WIRELESS DIGITAL NOZZLE FOR WIRELESS SYSTEM

### TECHNICAL DATA

SKU	250416
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	4 AA Alkaline batteries
WORKING TEMP. RANGE	20° to 122° F



**250417**

OIL 0



## WIRELESS DIGITAL NOZZLE FOR WIRELESS SYSTEM

### TECHNICAL DATA

SKU	250417
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	4 AA Alkaline batteries
WORKING TEMP. RANGE	20° to 122° F

## OIL DISPENSER BAR

Oil dispense bars are always ideal for keeping your work environment clean. Fed by air-operated pumps or with connection to a centralized system/lube room, it offers 12 different configurations to supply all your needs. They are now available with a built-in cabinet, which will improve your workspace making it cleaner and safer. Oil dispenser bar is a great alternative solution for those situations when the installation of hose-reels is not an option and for when you want to make your installation more efficient. It assures a quick and clean dispense without wastes.

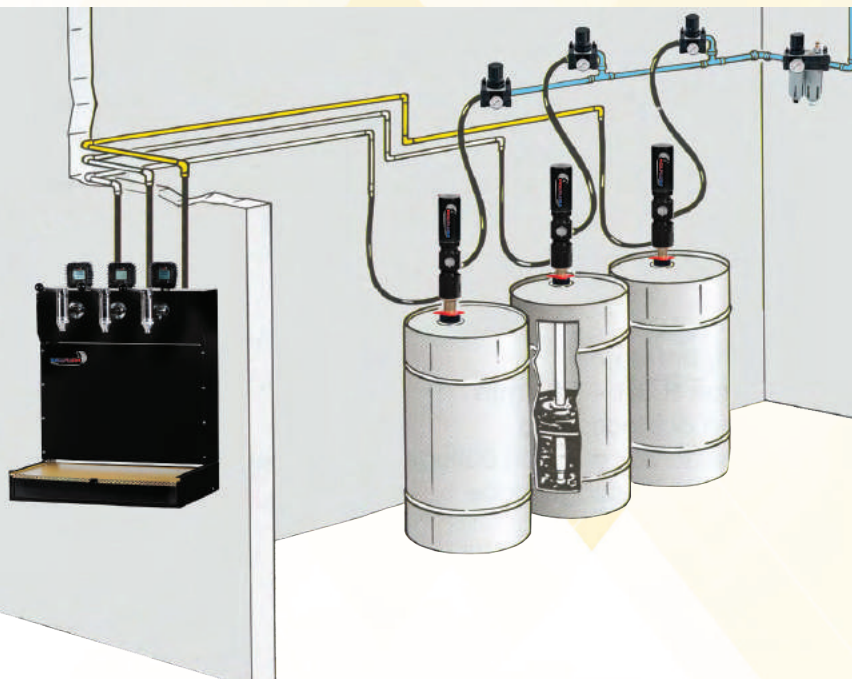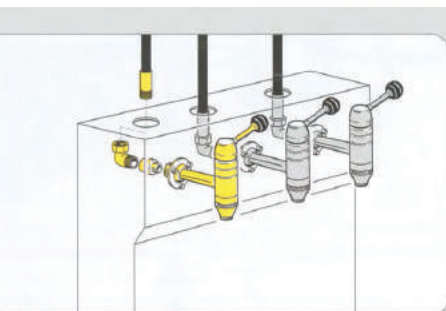

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250701**

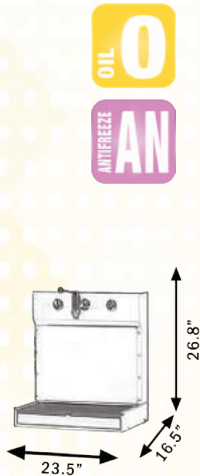

## OIL DISPENSER BAR 1 OUTLET WITHOUT METER

### TECHNICAL DATA


SKU	250701
MATERIAL	Steel
METER	No
OUTLET	1 (250019)
WEIGHT	51 lbs

#### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



**250702**

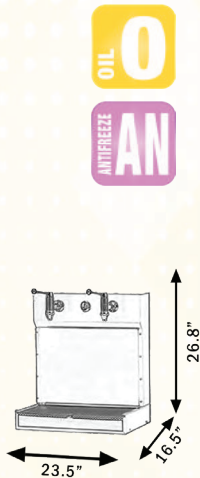

## OIL DISPENSER BAR 2 OUTLET WITHOUT METER

### TECHNICAL DATA


SKU	250702
MATERIAL	Steel
METER	No
OUTLET	2 (250019)
WEIGHT	53 lbs

#### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



**250703**

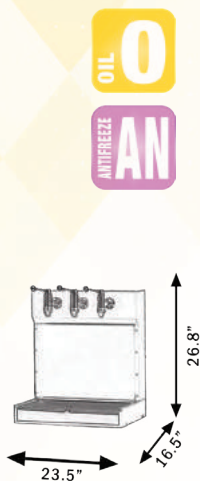

## OIL DISPENSER BAR 3 OUTLET WITHOUT METER

### TECHNICAL DATA

SKU	250703
MATERIAL	Steel
METER	No
OUTLET	3 (250019)
WEIGHT	55 lbs

#### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications


## OIL DISPENSER BAR 1 OUTLET WITH METER

### TECHNICAL DATA

SKU	250704
MATERIAL	Steel
METER	1 (260061)
OUTLET	1 (250019)
WEIGHT	52 lbs

#### Typical Applications

- Automotive dealerships
- Fleet service facilities
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Industrial applications



**250704**


## OIL DISPENSER BAR 2 OUTLET WITH METER

### TECHNICAL DATA

SKU	250705
MATERIAL	Steel
METER	2 (260061)
OUTLET	2 (250019)
WEIGHT	55 lbs

#### Typical Applications

- Automotive dealerships
- Fleet service facilities
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Industrial applications



**250705**


## OIL DISPENSER BAR 3 OUTLET WITH METER

### TECHNICAL DATA

SKU	250706
MATERIAL	Steel
METER	3 (260061)
OUTLET	3 (250019)
WEIGHT	58 lbs

#### Typical Applications

- Automotive dealerships
- Fleet service facilities
- Heavy-duty dealerships
- Service shops
- Fast lube centers
- Industrial applications



**250706**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION


ACCESSORIES



**250721**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



## OIL DISPENSER BAR WITH CABINET 1 OUTLET WITHOUT METER

### TECHNICAL DATA


SKU	250721
MATERIAL	Steel
METER	No
OUTLET	1 (250019)
WEIGHT	100 lbs



**250722**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



## OIL DISPENSER BAR WITH CABINET 2 OUTLET WITHOUT METER

### TECHNICAL DATA


SKU	250722
MATERIAL	Steel
METER	No
OUTLET	2 (250019)
WEIGHT	103 lbs



**250723**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



## OIL DISPENSER BAR WITH CABINET 3 OUTLET WITHOUT METER

### TECHNICAL DATA

SKU	250723
MATERIAL	Steel
METER	No
OUTLET	3 (250019)
WEIGHT	106 lbs

## OIL DISPENSER BAR WITH CABINET 1 OUTLET WITH METER


### TECHNICAL DATA

SKU	250724
MATERIAL	Steel
METER	1 (260061)
OUTLET	1 (250019)
WEIGHT	100 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



**250724**

## OIL DISPENSER BAR WITH CABINET 2 OUTLET WITH METER


### TECHNICAL DATA

SKU	250725
MATERIAL	Steel
METER	2 (260061)
OUTLET	2 (250019)
WEIGHT	103 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



**250725**

## OIL DISPENSER BAR WITH CABINET 3 OUTLET WITH METER


### TECHNICAL DATA

SKU	250726
MATERIAL	Steel
METER	3 (260061)
OUTLET	3 (250019)
WEIGHT	106 lbs



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications



**250726**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



## 500 GAL DOUBLE WALL TANK CONTROL HANDLE

### TECHNICAL DATA



**235225**

\* Available with different accessories, different sizes and configuration upon request.

SKU	235225
TANK CAPACITY	500 GAL
PUMP	250107 - Air Op. Pump 5:1 - 7.4 GPM
HOSE REEL	253802 - 50 ft 1/2" Hose
CONNECTION HOSE	241403 - 3 ft 1/2" Hose
NOZZLE	250250 - Digital Oil Control Handle
AIR FILTER AND REGULATOR	450350 - Air Filter Reg. and Lubricator
LEVEL GAUGE	Krueger Level Gauge
BREATHER	Yes
EMERGENCY VENT	2x Emergency Vents 4"
FILL CAP	2" Lockable Fill Cap Flip Top

\* Available with desiccant breather.

#### Typical Applications

- Automotive dealerships
- Service shops
- Heavy-duty dealerships
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture



## 300 GAL DOUBLE WALL TANK CONTROL HANDLE

### TECHNICAL DATA



**235210**

\* Available with different accessories, different sizes and configuration upon request.

SKU	235210
TANK CAPACITY	300 GAL
PUMP	251904 - Air Op. Pump 5:1 - 7.4 GPM
HOSE REEL	253802 - 50 ft 1/2" Hose
CONNECTION HOSE	241403 - 3 ft 1/2" Hose
NOZZLE	250250 - Digital Oil Control Handle
AIR FILTER AND REGULATOR	450350 - Air Filter Reg. and Lubricator
LEVEL GAUGE	Krueger Level Gauge
BREATHER	Yes
EMERGENCY VENT	2x Emergency Vents 4"
FILL CAP	2" Lockable Fill Cap Flip Top

\* Available with desiccant breather.

#### Typical Applications

- Automotive dealerships
- Service shops
- Heavy-duty dealerships
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture

## WOLFLUBE **eco** TANK 130 GAL CAPACITY FULLY EQUIPPED

### TECHNICAL DATA

SKU	235110
TANK CAPACITY	130 GAL Polyethylene
MATERIAL	Polyethylene
PUMP	251901 - Air Op. Pump 3:1 - 6.6 GPM
HOSE	241220 - 20 ft 1/2" Hose
NOZZLE	250250 - Digital Oil Control Handle
AIR FILTER AND REGULATOR	450350 - Air Filter Reg. and Lubricator
ADDITIONAL VALVE	3/4" Ball Valve
LEVEL INDICATOR	Yes


#### Typical Applications

- Automotive dealerships
- Service shops
- Heavy-duty dealerships
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture



**235110**

\* Available with different accessories, different pumps and configuration upon request.



## WOLFLUBE **eco** TANK 130 GAL CAPACITY

### TECHNICAL DATA

SKU	235100
TANK CAPACITY	130 GAL Polyethylene
MATERIAL	Polyethylene
PUMP THREAD	2" BSP(f)
HOSE SUPPORT	Yes
NOZZLE SUPPORT	Yes
ADDITIONAL VALVE	3/4" Ball Valve
LEVEL INDICATOR	Yes

#### Typical Applications

- Automotive dealerships
- Service shops
- Heavy-duty dealerships
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture



**235100**



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES &amp; METERS

MANUAL PUMPS

DRAINERS &amp; DISPENSERS

STORAGE &amp; FILTRATION

ACCESSORIES



## 257014



## 257016



## 258014



## 258016

## PROFESSIONAL BULK OIL STORAGE AND TRANSFERRING SYSTEM

Professional bulk and transfer Oil system, operating on a “recirculate (kidney loop)” basis through an absolute filter  $\beta 1000/5\mu$  with saturation level indicator. Installed between the tank and the filter, the professional model includes a digital flow meter to control the cycles of oil filtering (66 GAL each Cycle). This model also includes a faucet to take samples for analysis. Each tank has its own completely independent and dedicated system, composed by faucet, samples system, pump, meter, hose, and filter to prevent cross-contamination. The system functions with gear pumps at 3.5 GPM flow rate, max 170 PSI, 120V, 3-minute bypass valve, with ON/OFF button including LED indicator and IP55 protection. To be used with lubricants with a viscosity up to 2000 cSt (104° Fahrenheit). The system reservoirs vent through hygroscopic air filters with silica gel, with a particulate filter of 2 p and activated carbon filter for retention up to 123 odors. Containment basin with capacity for all system reservoirs.

### Typical Applications

- Industrial applications
- Lube Rooms

### TECHNICAL DATA

SKU	257014	257016	258014	258016
SYSTEM TYPE	Professional	Professional	Professional	Professional
TANK QTY.	4	6	4	6
TANK CAPACITY	66 GAL	66 GAL	66 GAL	66 GAL
TANK MATERIAL	POLYETHYLENE	POLYETHYLENE	ALUMINUM	ALUMINUM
TANK DIMENSIONS	Ø25.2	Ø25.2	22" x 21.7" x 35.4"	22" x 21.7" x 35.4"
PUMP	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz
FLOW RATE	3.7 GPM	3.7 GPM	3.7 GPM	3.7 GPM
PUMP POWER WATT	1200	1200	1200	1200
MAX. VISCOSITY	2000 cSt	2000 cSt	2000 cSt	2000 cSt
BYPASS VALVE	YES	YES	YES	YES
FILTER	4 Filters $\beta 1000/5\mu$	6 Filters $\beta 1000/5\mu$	4 Filters $\beta 1000/5\mu$	6 Filters $\beta 1000/5\mu$
METER	4 Digital Meters	6 Digital Meters	4 Digital Meters	6 Digital Meters
DIMENSIONS	104" x 63" x 62"	104" x 102" x 62"	91" x 56" x 62"	103" x 87" x 54"
DESICCANT BREATHER	4 Breathers	6 Breathers	4 Breathers	6 Breathers
WEIGHT	1,213 lbs	1,819 lbs	1,213 lbs	1,477 lbs

## STANDARD BULK OIL STORAGE AND TRANSFERING SYSTEM

OIL 0

Each tank has its own completely independent and dedicated system, composed by faucet, samples system, pump, meter, hose, and filter to prevent cross contamination. The system functions with gear pumps at 3.5 GPM flow rate, max 170 PSI, 120V, 3-minute bypass valve, with ON/OFF button including LED indicator and IP55 protection. To be used with lubricants with a viscosity up to 2000 cSt (104° Fahrenheit). The system reservoirs vent through hygroscopic air filters with silica gel, with particulate filter of 2 p and activated carbon filter for retention up to 123 odors. Containment basin with capacity for all system reservoirs.

### Typical Applications

- Industrial applications
- Lube Rooms



257004



257006



258004



258006

### TECHNICAL DATA

SKU	257004	257006	258004	258006
SYSTEM TYPE	Standard	Standard	Standard	Standard
TANK QTY.	4	6	4	6
TANK CAPACITY	66 GAL	66 GAL	66 GAL	66 GAL
TANK MATERIAL	POLYETHYLENE	POLYETHYLENE	ALUMINUM	ALUMINUM
TANK DIMENSIONS	Ø25.2	Ø25.2	22" x 21.7" x 35.4"	22" x 21.7" x 35.4"
PUMP	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz
FLOW RATE	3.7 GPM	3.7 GPM	3.7 GPM	3.7 GPM
PUMP POWER WATT	1200	1200	1200	1200
MAX. VISCOSITY	2000 cSt	2000 cSt	2000 cSt	2000 cSt
BYPASS VALVE	YES	YES	YES	YES
FILTER	4 Filters 30µ	6 Filters 30µ	4 Filters 30µ	6 Filters 30µ
METER	No	No	No	No
DIMENSIONS	104" x 63" x 62"	104" x 102" x 62"	91" x 56" x 62"	103" x 87" x 54"
DESICCANT BREATHER	4 Breathers	6 Breathers	4 Breathers	6 Breathers
WEIGHT	1,210 lbs	1,814 lbs	1,210 lbs	1,472 lbs

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**254101**



SUITABLE FOR :



OIL 0

## AIR OP. OIL FILTERING UNIT WITH HOSE REEL

### TECHNICAL DATA


SKU	254101
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 10µ
SECONDARY FILTER	Microglass, 1,000 x 5µ
MAX. WORKING PRESSURE	116 PSI
DOWNTUBE	5ft
CONTROL HANDLE	200301 - 3/4" Inlet/Outlet
HOSE REEL	251009 - 3/4" - 50ft
FOR DRUMS (DRUM SIZE)	55 Gal Drum
FILTERING SYSTEM	Particulate
WEIGHT	575 lbs

#### Typical Applications

- Industrial applications
- Lube Rooms



**254201**



SUITABLE FOR :



OIL 0

## ELECTRIC OIL FILTERING UNIT WITH HOSE REEL

### TECHNICAL DATA

SKU	254201
PUMP	Electric 110V / 60Hz
PRIMARY FILTER	Microglass, 1,000 x 10µ
SECONDARY FILTER	Microglass, 1,000 x 5µ
MAX. WORKING PRESSURE	145 PSI
DOWNTUBE	5ft
CONTROL HANDLE	200301 - 3/4" Inlet/Outlet
HOSE REEL	251009 - 3/4" - 50ft
FOR DRUMS (DRUM SIZE)	55 Gal Drum
FILTERING SYSTEM	Particulate
WEIGHT	595 lbs

#### Typical Applications

- Industrial applications
- Lube Rooms

## AIR OP. OIL FILTERING UNIT SINGLE FILTERING


### TECHNICAL DATA

SKU	252101
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5μ
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 220
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	100 lbs

OIL 0

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms



**252101**

## AIR OP. OIL FILTERING UNIT DOUBLE FILTERING


### TECHNICAL DATA

SKU	252102
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5μ
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 220
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	115 lbs

OIL 0

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms



**252102**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**252201**

OIL 0

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms



## ELECTRIC OIL FILTERING UNIT - SINGLE FILTERING

### TECHNICAL DATA

SKU	252201
PUMP	Electric 110V / 60 Hz - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5 $\mu$
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 320
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	163 lbs




**252202**

OIL 0

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms



## ELECTRIC OIL FILTERING UNIT - DOUBLE FILTERING

### TECHNICAL DATA

SKU	252202
PUMP	Electric 110V / 60 Hz - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5 $\mu$
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 320
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	168 lbs

## 3 WHEELS TROLLEY WITH HYDRAULIC LIFTER

### TECHNICAL DATA

SKU	250042
MATERIAL	Steel
WHEELS	3 Wheels (1 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	27"
LIFT CAPACITY	Up to 550 lbs
WEIGHT	93 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



**250042**

## TROLLEY WITH 2 PNEUMATIC WHEELS

### TECHNICAL DATA

SKU	250040
MATERIAL	Steel
WHEELS	2 Pneumatic Wheels
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	64 lbs



**250040**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## 4 WHEELS DRUM CRADLE

### TECHNICAL DATA

SKU	203401
MATERIAL	Steel
WHEELS	4 Wheels
FOR DRUMS (DRUM SIZE)	55 Gal Drum
LIFT CAPACITY	Up to 600 lbs
WEIGHT	45 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**203401**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

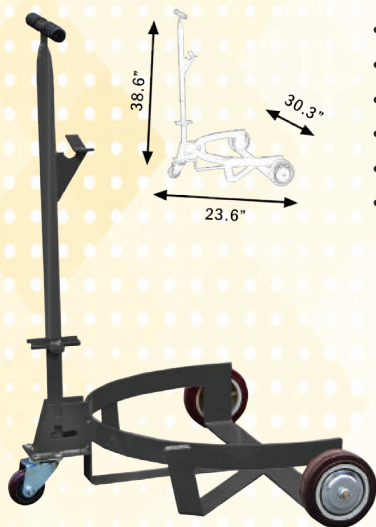

**250043**



## 3 WHEELS TROLLEY WITH REMOVABLE HANDLE

### TECHNICAL DATA


SKU	250043
MATERIAL	Steel
WHEELS	3 Wheels (1 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	23.4"
WEIGHT CAPACITY	Up to 550 lbs
WEIGHT	36 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



**250039**



## 3 WHEELS TROLLEY

### TECHNICAL DATA


SKU	250039
MATERIAL	Steel
WHEELS	3 Wheels (1 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	23.4"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	50 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



**203501**



## 3 WHEELS TROLLEY

### TECHNICAL DATA

SKU	203501
MATERIAL	Steel
WHEELS	2 Wheels
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	26"
WEIGHT CAPACITY	Up to 1,200 lbs
WEIGHT	35 lbs

## 4 WHEELS TROLLEY FOR 55 GAL DRUMS

### TECHNICAL DATA

SKU	250067
MATERIAL	Steel
WHEELS	4 Wheels (2 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	28.5"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	83 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



**250067**


## 4 WHEELS TROLLEY FOR 55 GAL DRUMS

### TECHNICAL DATA

SKU	250066
MATERIAL	Steel
WHEELS	4 Wheels (2 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	28.5"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	83 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



**250066**


## 4 WHEELS TROLLEY FOR 16 GAL DRUM

### TECHNICAL DATA

SKU	260030
MATERIAL	Steel
WHEELS	4 Wheels (2 with swivel)
FOR DRUMS (DRUM SIZE)	16 Gal Drum
DISTANCE BETWEEN WHEELS	18.5"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	83 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



**260030**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION


ACCESSORIES



**250038**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



## TROLLEY WITH 2 PNEUMATIC WHEELS

### TECHNICAL DATA


SKU	250038
MATERIAL	Steel
WHEELS	2 Pneumatic Wheels
FOR DRUMS (DRUM SIZE)	16 Gal Drum
FOR DRUMS WITHIN	14.5" to 16.5"
WEIGHT	17 lbs



**250037**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



## TROLLEY WITH 2 PNEUMATIC WHEELS

### TECHNICAL DATA


SKU	250037
MATERIAL	Steel
WHEELS	2 Pneumatic Wheels
FOR DRUMS (DRUM SIZE)	16 Gal Drum
FOR DRUMS WITHIN	10.3" to 13.8"
WEIGHT	15 lbs



**250036**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



## 2 WHEELS TROLLEY

### TECHNICAL DATA

SKU	250036
MATERIAL	Steel
WHEELS	2 Pneumatic Wheels
FOR DRUMS (DRUM SIZE)	5 Gal Drum
FOR DRUMS WITHIN	10.2" to 16.5"
WEIGHT	13 lbs

## DRUM DOLLY

### TECHNICAL DATA

SKU	203301
MATERIAL	Steel
WHEELS	4 Wheels
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DIAMETER	23.4"
WEIGHT CAPACITY	Up to 1200 lbs
WEIGHT	25 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

### SUITABLE FOR :



**203301**

## DRUM DOLLY

### TECHNICAL DATA

SKU	203302
MATERIAL	Steel
WHEELS	4 Wheels
FOR DRUMS (DRUM SIZE)	16 Gal Drum
DIAMETER	14.2"
WEIGHT CAPACITY	Up to 200 lbs
WEIGHT	11 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

### SUITABLE FOR :



**203302**

## DRUM DOLLY

### TECHNICAL DATA

SKU	203303
MATERIAL	Steel
WHEELS	4 Wheels
FOR DRUMS (DRUM SIZE)	5 Gal Drum
DIAMETER	11"
WEIGHT CAPACITY	Up to 200 lbs
WEIGHT	8 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

### SUITABLE FOR :



**203303**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**230050**




**230040**



**230030**

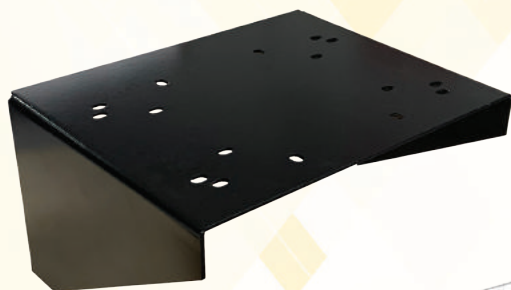

**260003**



## WALL BRACKET KIT FOR 1" DIAPHRAGM PUMP

### TECHNICAL DATA

SKU	230050
BRACKET	260003 - Wall Bracket
SUCTION HOSE	243505 - 5 ft - 1" NPT(m) x NPT(m)
DISCHARGE HOSE	243510 - 10 ft - 1" NPT(m) x NPT(m)
QUICK CONNECTION	2x Sets ((2x) 259713 and (2x) 259714)
WEIGHT	28 lbs

## WALL BRACKET KIT FOR 3/4" DIAPHRAGM PUMP

### TECHNICAL DATA

SKU	230040
BRACKET	260003 - Wall Bracket
SUCTION HOSE	242505 - 5 ft - 3/4" NPT(m) x NPT(m)
DISCHARGE HOSE	242510 - 10 ft - 3/4" NPT(m) x NPT(m)
QUICK CONNECTION	2x Sets ((2x) 259711 and (2x) 259712)
WEIGHT	23 lbs

## WALL BRACKET KIT FOR 1/2" DIAPHRAGM PUMP

### TECHNICAL DATA

SKU	230030
BRACKET	260003 - Wall Bracket
SUCTION HOSE	241205 - 5 ft - 1/2" NPT(m) x NPT(m)
DISCHARGE HOSE	241210 - 10 ft - 1/2" NPT(m) x NPT(m)
QUICK CONNECTION	2x Sets ((2x) 259709 and (2x) 259710)
WEIGHT	19 lbs

## WALL BRACKET FOR DIAPHRAGM PUMP

### TECHNICAL DATA

SKU	260003
MATERIAL	Steel
DIMENSIONS	10.5" x 13.0" x 7.0"
WEIGHT	9 lbs

## 4 WAY VALVE

### TECHNICAL DATA

SKU	250530
MATERIAL	Aluminum
SEAL	NBR
MAX. WORKING PRESSURE	200 PSI
THREADS SIZES	1" NPT(f)
WEIGHT	23 lbs




**250530**


Usually installed in a mobile trolley or lube truck, the four-way valve drains the wasted oil from the drums which later will be dispensed into a waste oil tank.

Our four-way valve composed with a handle that swings was developed to simplify the suction/discharge process, making it easier to pull and push (transfer) oils, new or used, from one recipient to another. It makes it possible, with only one single pump to operate both procedures suction and dispensing in the same installation.

The images below illustrate both steps, the suction and dispensing process. Using our four-way valve in a mobile or fixed installation can help drain the oil from the first recipient by switching the handle dispenses into the second one.

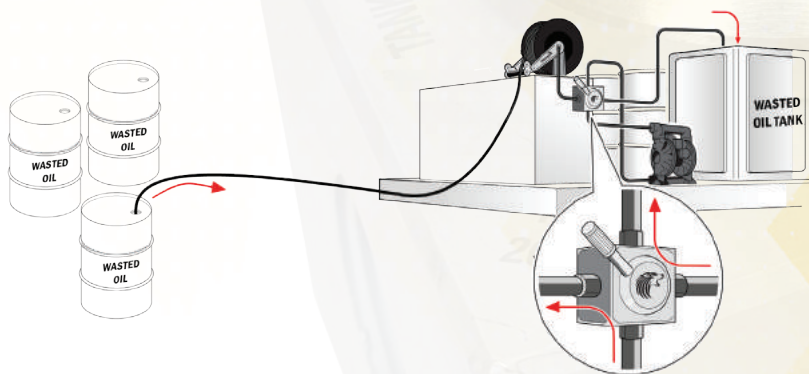

After collecting the wasted oil, it is time to transfer it to the wasted oil tank. Everything could be done using the same pump and installation.

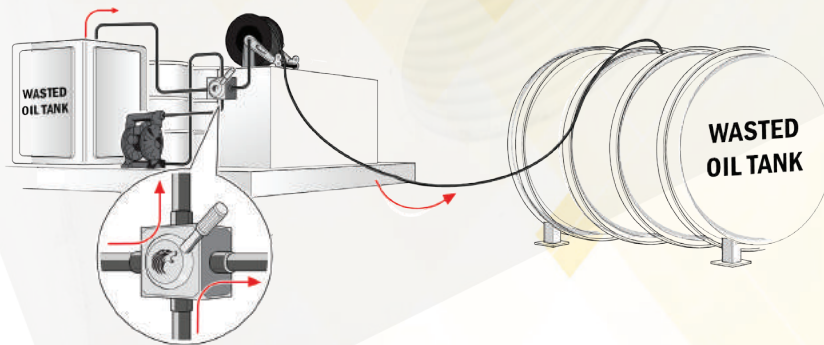

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS



**250011**



## WALL BRACKET FOR INDUSTRIAL PUMPS

### TECHNICAL DATA

SKU	250011
MATERIAL	Steel
ANTI-VIBRATION SYSTEM	Yes
WEIGHT	18 lbs


KITS

HOSE REELS

HOSES



**204601**



## WALL BRACKET FOR STUB PUMPS

### TECHNICAL DATA

SKU	204601
MATERIAL	Steel
THREAD SIZE	2" BSP(f)
WEIGHT	2 lbs

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**204701**



## WALL BRACKET FOR HOSES AND NOZZLES

### TECHNICAL DATA

SKU	204701
MATERIAL	Steel
DIMENSIONS	15.8" x 4.8"
WEIGHT	2 lbs

\* Hose and Nozzle not included.



**250030**

## WALL BRACKET/SUPPORT FOR PROBES

### TECHNICAL DATA

SKU	250030
MATERIAL	Aluminum
WEIGHT	2 lbs

## TOTE/WALL PICKING UP DROP BRACKET

### TECHNICAL DATA

SKU	250006
MATERIAL	Steel
REMOVABLE BASIN	Yes
WEIGHT	11 lbs

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



**250006**

## TOTE BRACKET FOR PICKING UP DROP (250006)

### TECHNICAL DATA

SKU	250014
MATERIAL	Steel
WEIGHT	2 lbs



**250014**


## TOTE BRACKET FOR HOSE REEL AND PUMP

### TECHNICAL DATA

SKU	250013
MATERIAL	Steel
THREAD SIZE	2" BSP(f)
WEIGHT	25 lbs

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

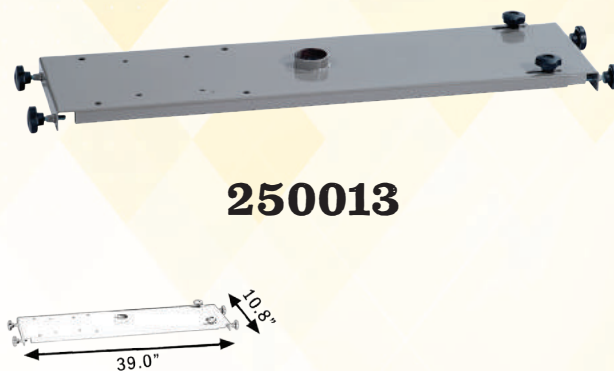

**250013**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES & METERS

MANUAL PUMPS


DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES




**150009**




## WALL BRACKET FOR HOSE REELS

### TECHNICAL DATA

SKU	150009
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	2 Reels
CAPACITY - F550 MODEL	2 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	23.3" x 15.4" x 2.6"
WEIGHT	20 lbs

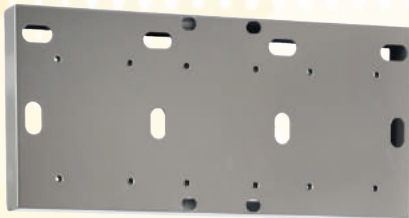


**150010**




## WALL BRACKET FOR HOSE REELS

### TECHNICAL DATA

SKU	150010
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	3 Reels
CAPACITY - F550 MODEL	3 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	34.0" x 15.4" x 2.6"
WEIGHT	27 lbs

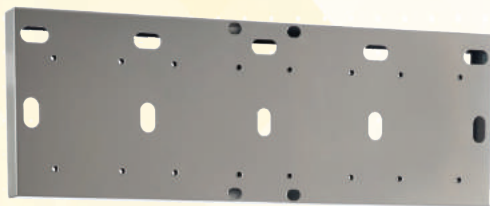

**150011**




## WALL BRACKET FOR HOSE REELS

### TECHNICAL DATA

SKU	150011
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	4 Reels
CAPACITY - F550 MODEL	4 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	43.8" x 15.4" x 2.6"
WEIGHT	34 lbs



**150012**



## WALL BRACKET FOR HOSE REELS


### TECHNICAL DATA

SKU	150012
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	(Not applicable to this model)
CAPACITY - F550 MODEL	(Not applicable to this model)
CAPACITY - F555 MODEL	(Not applicable to this model)
CAPACITY - CF500 MODEL	1 Reels
WEIGHT	5 lbs

## SWIVELLING WALL BRACKET FOR HOSE REELS

### TECHNICAL DATA

SKU	150013
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	1 Reel
CAPACITY - F550 MODEL	(Not applicable to this model)
CAPACITY - F555 MODEL	(Not applicable to this model)
DIMENSIONS	7.7" x 5.9"
WEIGHT	3 lbs




**150013**

## SWIVELLING WALL BRACKET FOR HOSE REELS

### TECHNICAL DATA

SKU	150014
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	(Not applicable to this model)
CAPACITY - F550 MODEL	1 Reel
CAPACITY - F555 MODEL	(Not applicable to this model)
DIMENSIONS	10.1" x 7.9"
WEIGHT	4 lbs




**150014**

## SWIVELLING WALL BRACKET FOR HOSE REELS

### TECHNICAL DATA

SKU	150015
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	(Not applicable to this model)
CAPACITY - F550 MODEL	(Not applicable to this model)
CAPACITY - F555 MODEL	1 Reel
DIMENSIONS	10.1" x 9.9"
WEIGHT	4 lbs



**150015**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250015**

## SUCTION TUBE SET FOR DRUMS

### TECHNICAL DATA

SKU	250015
MATERIAL	Steel
DOWN TUBE	37" Long with Check Valve
HOSE	6 ft
BUNG ADAPTOR	Yes - 2" Thread
WEIGHT	14 lbs



**250016**

## SUCTION TUBE SET FOR TOTES

### TECHNICAL DATA

SKU	250016
MATERIAL	Steel
DOWN TUBE	49" Long with Check Valve
HOSE	6 ft
BUNG ADAPTOR	Yes - 2" Thread
WEIGHT	15 lbs



**250017**

## STAINLESS STEEL SUCTION TUBE SET FOR DRUMS

### TECHNICAL DATA

SKU	250017
MATERIAL	Stainless Steel
DOWN TUBE	37" Long with Check Valve
HOSE	6 ft
BUNG ADAPTOR	Yes - 2" Thread
WEIGHT	14 lbs



**250018**

## STAINLESS STEEL SUCTION TUBE SET FOR TOTES

### TECHNICAL DATA

SKU	250018
MATERIAL	Stainless Steel
DOWN TUBE	49" Long with Check Valve
HOSE	6 ft
BUNG ADAPTOR	Yes - 2" Thread
WEIGHT	15 lbs

Wolflube's new oil containers are the ideal solution to safely transfer and storage oil. Some of the main features are robustly made with impact-proof, thick, durable plastic and ergonomically designed for making the transfer and storage easier and safer than regular plastic containers. Available in 3 different container sizes and a range of different lid colors, making it easier and safer to identify the right oil/container.

## OIL CONTAINER FOR TRANSFER AND STORAGE

### TECHNICAL DATA

SKU	257103
MATERIAL	Plastic
CAPACITY	0.8 GAL
WEIGHT	2 lbs



**257103**

## OIL CONTAINER FOR TRANSFER AND STORAGE

### TECHNICAL DATA

SKU	257105
MATERIAL	Plastic
CAPACITY	1.3 GAL
WEIGHT	3 lbs



**257105**

## OIL CONTAINER FOR TRANSFER AND STORAGE

### TECHNICAL DATA

SKU	257110
MATERIAL	Plastic
CAPACITY	2.6 GAL
WEIGHT	4 lbs



**257110**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**257121**

## 1/2" SPOUT LID

### TECHNICAL DATA

SKU	257121
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Black



**257122**

## 1/2" SPOUT LID

### TECHNICAL DATA

SKU	257122
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Yellow



**257123**

## 1/2" SPOUT LID

### TECHNICAL DATA

SKU	257123
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Red



**257124**

## 1/2" SPOUT LID

### TECHNICAL DATA

SKU	257124
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Blue



**257125**

## 1/2" SPOUT LID

### TECHNICAL DATA

SKU	257125
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Green

## 1" SPOUT LID

### TECHNICAL DATA

SKU	257131
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Black



**257131**

## 1" SPOUT LID

### TECHNICAL DATA

SKU	257132
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Yellow



**257132**

## 1" SPOUT LID

### TECHNICAL DATA

SKU	257133
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Red



**257133**

## 1" SPOUT LID

### TECHNICAL DATA

SKU	257134
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Blue



**257134**

## 1" SPOUT LID

### TECHNICAL DATA

SKU	257135
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Green



**257135**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**203908**

## 5 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203908
MATERIAL	Plastic
CAPACITY	5 Quarts
LID TYPE	Clip Lid



**203907**

## 3 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203907
MATERIAL	Plastic
CAPACITY	3 Quarts
LID TYPE	Clip Lid



**203906**

## 2 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203906
MATERIAL	Plastic
CAPACITY	2 Quarts
LID TYPE	Clip Lid



**203905**

## 1 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203905
MATERIAL	Plastic
CAPACITY	1 Quarts
LID TYPE	Clip Lid



**203910**

## 10 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203910
MATERIAL	Plastic
CAPACITY	10 Quarts (2.5 GAL)
LID TYPE	Threaded Lid

## 6 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203909
MATERIAL	Plastic
CAPACITY	6 Quarts (1.6 GAL)
LID TYPE	Threaded Lid



**203909**

## 5 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203904
MATERIAL	Plastic
CAPACITY	5 Quarts
LID TYPE	Threaded Lid



**203904**

## 3 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203903
MATERIAL	Plastic
CAPACITY	3 Quarts
LID TYPE	Threaded Lid



**203903**

## 2 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203902
MATERIAL	Plastic
CAPACITY	2 Quarts
LID TYPE	Threaded Lid



**203902**

## 1 QT PLASTIC CONTAINER

### TECHNICAL DATA

SKU	203901
MATERIAL	Plastic
CAPACITY	1 Quarts
LID TYPE	Threaded Lid



**203901**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES &amp; METERS

MANUAL PUMPS

DRAINERS &amp; DISPENSERS

STORAGE &amp; FILTRATION

ACCESSORIES



**204009**

## 4 QT PLASTIC FUNNEL

### TECHNICAL DATA

SKU	204009
MATERIAL	Plastic
CAPACITY	4 Quarts
FILTER	Wire Mesh Screen



**204003**

## 3 QT PLASTIC FUNNEL WITH BUNG ADAPTOR

### TECHNICAL DATA

SKU	204003
MATERIAL	Plastic
CAPACITY	3 Quarts
FILTER	Wire Mesh Screen

\* Bung adaptor will keep the funnel safely connected to the drum avoiding spill and accidents.



**204002**

## 3 QT PLASTIC FUNNEL

### TECHNICAL DATA

SKU	204002
MATERIAL	Plastic
CAPACITY	3 Quarts
FILTER	Wire Mesh Screen



**204001**

## 1.7 QT PLASTIC FUNNEL

### TECHNICAL DATA

SKU	204001
MATERIAL	Plastic
CAPACITY	1.7 Quarts
FILTER	Wire Mesh Screen

## OIL CAN - RIGID SPOUT 6 OZ CAPACITY

### TECHNICAL DATA

SKU	200401
MATERIAL	Steel
CAPACITY	6 Oz
SPOUT	5" Rigid



**200401**

## OIL CAN - FLEXIBLE SPOUT 6 OZ CAPACITY

### TECHNICAL DATA

SKU	200402
MATERIAL	Steel
CAPACITY	6 Oz
SPOUT	6" Flexible



**200402**

## OIL CAN - RIGID SPOUT 16 OZ CAPACITY

### TECHNICAL DATA

SKU	200501
MATERIAL	Steel
CAPACITY	16 Oz
SPOUT	6" Rigid



**200501**

## OIL CAN - FLEXIBLE SPOUT 16 OZ CAPACITY

### TECHNICAL DATA

SKU	200502
MATERIAL	Steel
CAPACITY	16 Oz
SPOUT	7" Flexible



**200502**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**250731**

## 90° CONNECTION FOR DISPENSE BAR METERS

### TECHNICAL DATA

SKU	250731
INLET / OUTLET	1/2" Male
MATERIAL	Steel



**200301**

## GOOSENECK SPIGOT

### TECHNICAL DATA

SKU	200301
INLET	1/2" BSP(f)
MATERIAL	Steel




**250019**

## STRAIGHT SPIGOT

### TECHNICAL DATA

SKU	250019
INLET	1/2" BSP(m)
MATERIAL	Steel

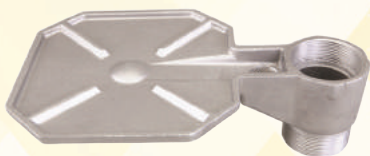


**204101**

## DRIP PAN

### TECHNICAL DATA

SKU	204101
THREADS	2" BSP(m) / 2" BSP(f)
MATERIAL	Aluminum

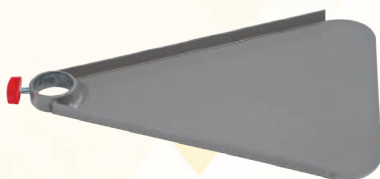

**204102**

## DRIP PAN

### TECHNICAL DATA

SKU	204102
MATERIAL	Steel

## DRUM FAUCET

### TECHNICAL DATA

SKU	204301
INLET	3/4" Male
MATERIAL	Polyethylene




**204301**

## DRUM FAUCET

### TECHNICAL DATA

SKU	204401
INLET	3/4" NPT(m)
MATERIAL	Steel



**204401**

## DRUM WRENCH

### TECHNICAL DATA

SKU	204201
MATERIAL	Aluminum



**204201**

## STEEL FOOT VALVE

### TECHNICAL DATA

SKU	200801
OUTLET	3/4" NPT(f)
MATERIAL	Steel

\* Recommended for custom down tubes and suction hoses.



**200801**

## TELESCOPIC DOWN TUBE

### TECHNICAL DATA

SKU	200010
THREAD	3/4" BSP(m)
LENGTH	18" to 34.5" long
SEAL	Nitrile
MATERIAL	Steel Galvanized



**200010**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS


MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS



**201000**


## BUNG ADAPTOR

### TECHNICAL DATA

SKU	201000
FOR DOWN TUBES Ø	1"
THREAD	2" BSP(m)
MATERIAL	Steel

KITS

HOSE REELS



**203400**

## BUNG ADAPTOR

### TECHNICAL DATA

SKU	203400
FOR DOWN TUBES Ø	3/4"
THREAD	2" BSP(m)
MATERIAL	Steel

HOSES



**250007**

## BUNG ADAPTOR FOR AIR OPERATED PUMPS

### TECHNICAL DATA

SKU	250007
FOR DOWN TUBES Ø	1.18"
MATERIAL	Aluminum / Plastic (red part)

NOZZLES & METERS

MANUAL PUMPS



**250008**

## BUNG ADAPTOR FOR AIR OPERATED PUMPS

### TECHNICAL DATA

SKU	250008
FOR DOWN TUBES Ø	1.65"
MATERIAL	Aluminum / Plastic (red part)

DRAINERS & DISPENSERS

STORAGE & FILTRATION



**250009**

## BUNG ADAPTOR FOR AIR OPERATED PUMPS

### TECHNICAL DATA

SKU	250009
FOR DOWN TUBES Ø	1.97"
MATERIAL	Aluminum / Plastic (red part)

ACCESSORIES



**251803** - Connects the down tube to the pump.



**Down tubes** - Available in four different sizes, these tube extensions allow you to transform your stub pump in a drum or tote pump. It also helps you building custom down tubes for different size tanks.



**251804** - This connector will connect two tube parts helping you to get the exactly length needed.



**251801** - One of the most important parts of the down tube, the foot/check valve will keep the down tube always full of oil, making the job easier for the pump.

## DOWN TUBE CONNECTOR TUBE TO PUMP

### TECHNICAL DATA

SKU	251803
THREAD	1.1/4" BSP(m)
THREAD	1" NPT(m)
MATERIAL	Steel



**251803**

## DOWN TUBE CONNECTOR FOR TUBE EXTENSION

### TECHNICAL DATA

SKU	251804
THREAD	1.1/4" BSP(m)
MATERIAL	Steel



**251804**

## CHECK/FOOT VALVE FOR AIR OP. DOWN TUBE

### TECHNICAL DATA

SKU	251801
THREAD	1.1/4" BSP(m)
MATERIAL	Steel



**251801**



**251840**



**251830**



**251820**



**251810**

### TECHNICAL DATA

SKU	251840	251830	251820	251810
THREADS	1.1/4" BSP(f)	1.1/4" BSP(f)	1.1/4" BSP(f)	1.1/4" BSP(f)
LENGTH	47.7"	35.9"	19.7"	9.9"
MATERIAL	Steel	Steel	Steel	Steel

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



PUMPS



**260121**



## HOSE STOP - 1/4" HOSE

### TECHNICAL DATA

SKU	260121
FOR HOSES Ø	1/4"
MATERIAL	Rubber

KITS



**260122**



## HOSE STOP - 5/16" HOSE

### TECHNICAL DATA

SKU	260121
FOR HOSES Ø	5/16"
MATERIAL	Rubber

HOSE REELS



**260123**



## HOSE STOP - 3/8" HOSE

### TECHNICAL DATA

SKU	260121
FOR HOSES Ø	3/8"
MATERIAL	Rubber

HOSES



**260124**



## HOSE STOP - 1/2" HOSE

### TECHNICAL DATA

SKU	260124
FOR HOSES Ø	1/2"
MATERIAL	Rubber

NOZZLES & METERS



**260125**



## HOSE STOP - 3/4" HOSE

### TECHNICAL DATA

SKU	260125
FOR HOSES Ø	3/4"
MATERIAL	Rubber

MANUAL PUMPS



**260126**



## HOSE STOP - 1" HOSE

### TECHNICAL DATA

SKU	260126
FOR HOSES Ø	1"
MATERIAL	Rubber

DRAINERS & DISPENSERS


STORAGE & FILTRATION

ACCESSORIES

## IBC TOTE ADAPTER

### TECHNICAL DATA

SKU	247034
INLET	2" Coarse Thread Female
FOR HOSE Ø	3/4"
MATERIAL	Polyethylene




**247034**

## IBC TOTE ADAPTER

### TECHNICAL DATA

SKU	247100
INLET	2" Coarse Thread Female
FOR HOSE Ø	1"
MATERIAL	Polyethylene



**247100**

## IBC TOTE ADAPTER

### TECHNICAL DATA

SKU	247114
INLET	2" Coarse Thread Female
FOR HOSE Ø	1.1/4"
MATERIAL	Polyethylene



**247114**

## IBC TOTE ADAPTER

### TECHNICAL DATA

SKU	247112
INLET	2" Coarse Thread Female
FOR HOSE Ø	1.1/2"
MATERIAL	Polyethylene



**247112**

## IBC TOTE ADAPTER

### TECHNICAL DATA

SKU	247200
INLET	2" Coarse Thread Female
FOR HOSE Ø	2"
MATERIAL	Polyethylene



**247200**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES & METERS

MANUAL PUMPS

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES



**259709**



## QUICK CONNECTOR - 1/2" FEMALE

### TECHNICAL DATA

SKU	259709
INLET	1/2" NPT(f)
MATERIAL	Galvanized Steel



**259710**



## QUICK CONNECTOR - 1/2" MALE

### TECHNICAL DATA

SKU	259710
INLET	1/2" NPT(f)
MATERIAL	Galvanized Steel



**259711**



## QUICK CONNECTOR - 3/4" FEMALE

### TECHNICAL DATA

SKU	259711
INLET	3/4" NPT(f)
MATERIAL	Galvanized Steel



**259712**



## QUICK CONNECTOR - 3/4" MALE

### TECHNICAL DATA

SKU	259712
INLET	3/4" NPT(f)
MATERIAL	Galvanized Steel



**259713**



## QUICK CONNECTOR - 1" FEMALE

### TECHNICAL DATA

SKU	259713
INLET	1" NPT(f)
MATERIAL	Galvanized Steel



**259714**



## QUICK CONNECTOR - 1" MALE

### TECHNICAL DATA

SKU	259714
INLET	1" NPT(f)
MATERIAL	Galvanized Steel

SKU	MATERIAL	INLET	OUTLET
150017	Galvanized Steel	1/2" NPT(f)	3/8" NPT(m)
150018	Galvanized Steel	1/2" NPT(f)	1/2" NPT(m)
247343	Galvanized Steel	3/4" NPT(f)	1/2" NPT(m)
247344	Galvanized Steel	3/4" NPT(f)	3/4" NPT(m)
247345	Galvanized Steel	3/4" NPT(f)	1" NPT(m)



SKU	MATERIAL	INLET	OUTLET
150021	Stainless Steel	3/8" NPT(m)	3/8" NPT(m)
150022	Stainless Steel	3/8" NPT(m)	1/2" NPT(m)
150023	Stainless Steel	1/2" NPT(m)	1/2" NPT(m)



SKU	MATERIAL	INLET	OUTLET
150032	Plated Steel	3/8" NPT(m)	3/8" NPT(m)
150033	Plated Steel	1/2" NPT(m)	1/4" NPT(m)
150914	Plated Steel	1/4" NPT(m)	1/4" NPT(m)
150915	Plated Steel	3/8" NPT(m)	1/4" NPT(m)



SKU	MATERIAL	INLET	OUTLET
150024	Plated Steel	3/4" NPT(m)	1/2" NPT(m)
150025	Plated Steel	3/4" NPT(m)	3/4" NPT(m)
150026	Plated Steel	1" NPT(m)	3/4" NPT(m)
150027	Plated Steel	1" NPT(m)	1" NPT(m)



PUMPS



**250035**



## HOSE REEL SWIVEL - 1"

### TECHNICAL DATA

SKU	250035
INLET / OUTLET	1" NPT(m)
MAX. WORKING PRESSURE	1,276 PSI
MATERIAL	Galvanized Steel

KITS



**250034**



## HOSE REEL SWIVEL - 3/4"

### TECHNICAL DATA

SKU	250034
INLET	3/4" NPT(m)
MAX. WORKING PRESSURE	1,523 PSI
MATERIAL	Galvanized Steel

HOSE REELS



**250033**



## HOSE REEL SWIVEL - 1/2"

### TECHNICAL DATA

SKU	250033
INLET	1/2" NPT(m)
MAX. WORKING PRESSURE	2,320 PSI
MATERIAL	Galvanized Steel

HOSES



**252920**



## REPLACEMENT ELEMENT - 10 $\mu$

### TECHNICAL DATA

SKU	252920
FLOW RATE	Up to 34.3 GPM
MAX. WORKING PRESSURE	560 PSI
FILTER ELEMENT	10 $\mu$ Absolute

NOZZLES & METERS



**252910**




## REPLACEMENT ELEMENT - 5 $\mu$

### TECHNICAL DATA

SKU	252910
FLOW RATE	Up to 34.3 GPM
MAX. WORKING PRESSURE	560 PSI
FILTER ELEMENT	5 $\mu$ Absolute

MANUAL PUMPS



**250029**

## PROBE SET - 10 PCS

### TECHNICAL DATA

SKU	250029
QUANTITY	10 Pieces Set

DRAINERS & DISPENSERS

STORAGE & FILTRATION

ACCESSORIES

# FUEL

GASOLINE **G**

KEROSENE **K**

DIESEL **DI**

PUMPS

## FUEL PUMPS

- PAGE 194 - 220V FUEL PUMPS
- PAGE 195 - 110V FUEL PUMPS
- PAGE 196 - 12V FUEL PUMPS
- PAGE 199 - DIAPHRAGM PUMPS



KITS

## FUEL KITS

- PAGE 211 - 220V FUEL KITS
- PAGE 212 - 110V FUEL KITS
- PAGE 214 - 12V FUEL KITS



HOSE REELS

## HOSE REELS AND HOSES

- PAGE 218 - HOSE REELS
- PAGE 220 - HOSES AND CONNECTION HOSES



HOSES

## NOZZLES

- PAGE 221 - AUTOMATIC FUEL NOZZLES
- PAGE 223 - AUTOMATIC FUEL NOZZLES - *NO PRESSURE NO FLOW*
- PAGE 224 - FUEL NOZZLES - *WITH HOOK*
- PAGE 225 - SPECIAL FUEL NOZZLES
- PAGE 226 - MANUAL FUEL NOZZLES



NOZZLES

## METERS

- PAGE 227 - DIGITAL METERS
- PAGE 228 - MECHANICAL METERS



METERS

## MANUAL PUMPS

- PAGE 229 - MANUAL PUMPS



MANUAL PUMPS

## ACCESSORIES

- PAGE 234 - FUEL SWIVELS
- PAGE 236 - BREAKAWAYS
- PAGE 237 - FUEL FILTERS
- PAGE 238 - 4 WAY VALVE
- PAGE 239 - REPLACEMENTS SPOUTS FOR FUEL NOZZLES
- PAGE 240 - FUEL NOZZLES SPLASH GUARD
- PAGE 241 - FUEL NOZZLES INSULATOR
- PAGE 244 - BRACKETS AND FITTINGS



ACCESSORIES

# FUEL PUMPS

- certified pumps.
- certified pumps.
- Pumps with flow rates from 12 GPM to 187 GPM.
- Inlet / Outlets up to 2”.
- High flow rate dispensing with low air consumption.
- Robust and high quality electrical and air operated pumps.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

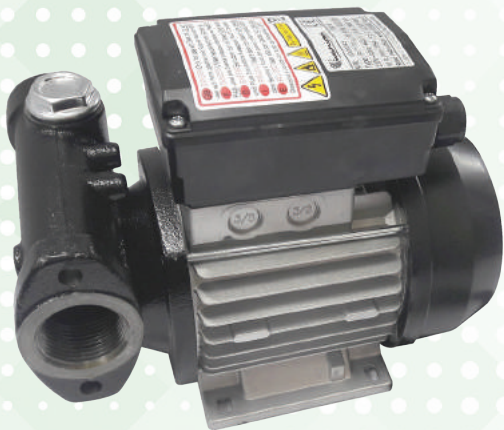

**350220**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities



## ELECTRIC FUEL PUMP 220V - UP TO 16 GPM

### TECHNICAL DATA


SKU	350220
VOLTAGE	220V
FREE FLOW RATE	Up to 16 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	40 / 40 Min.
RPM	3200
BY-PASS VALVE	Yes (Built-in)
POWER WATT	460
MAX. PRESSURE	45 PSI
MATERIAL	Cast Iron Body
WEIGHT	15 lbs



## ELECTRIC FUEL PUMP 220V - UP TO 15 GPM

### TECHNICAL DATA

SKU	352220
VOLTAGE	220V
FREE FLOW RATE	Up to 15 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	20 / 20 Min.
RPM	2800
BY-PASS VALVE	Yes (Built-in)
POWER WATT	550
MAX. PRESSURE	43 PSI
MATERIAL	Cast Iron Body
WEIGHT	12 lbs

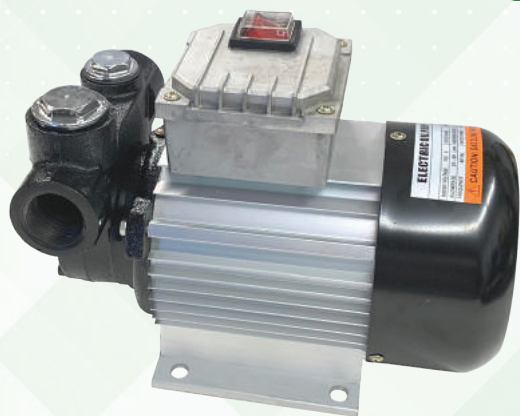

**352220**

### Typical Applications


- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

## ELECTRIC FUEL PUMP 110V - UP TO 16 GPM

DIESEL  
**DI**

### TECHNICAL DATA

SKU	350110
VOLTAGE	110V
FREE FLOW RATE	Up to 16 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	40 / 40 Min.
RPM	3200
BY-PASS VALVE	Yes (Built-in)
POWER WATT	460
MAX. PRESSURE	45 PSI
MATERIAL	Cast Iron Body
WEIGHT	15 lbs

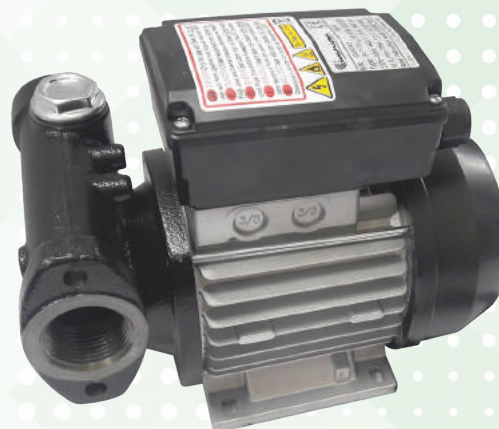

**350110**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

## ELECTRIC FUEL PUMP 110V - UP TO 13 GPM

GASOLINE  
**G**


DIESEL  
**DI**

KEROSENE  
**K**



### TECHNICAL DATA

SKU	301302
VOLTAGE	110V
FREE FLOW RATE	Up to 13 GPM
TO BE USED WITH	Gasoline, Diesel and Kerosene
INLET THREAD	1" NPT(f) Flanged
OUTLET THREAD	1" NPT(f) Flanged
MAX. HEIGHT SUCTION	7 ft
DUTY CYCLE (ON/OFF)	30 / 30 Min.
RPM	2700
BY-PASS VALVE	Yes (Built-in)
POWER WATT	250
MAX. AMP.	21
MATERIAL	Cast Iron Body
WEIGHT	15 lbs

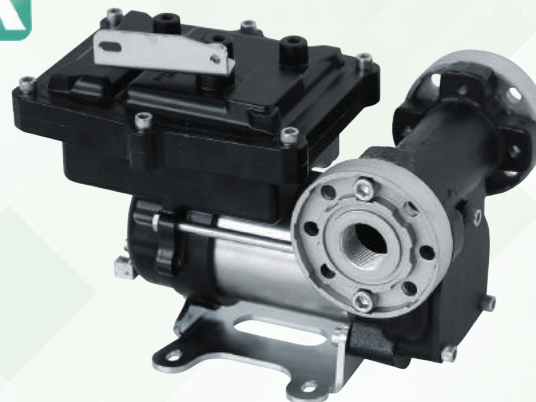

**301302**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

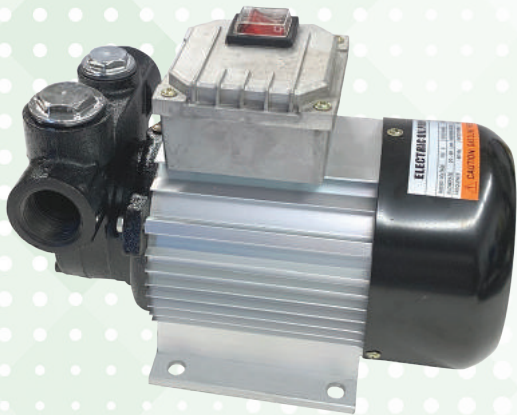

**352110**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

**DIESEL**  
**DI**

## ELECTRIC FUEL PUMP 110V - UP TO 15 GPM

### TECHNICAL DATA

SKU	352110
VOLTAGE	110V
FREE FLOW RATE	Up to 15 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	20 / 20 Min.
RPM	2800
BY-PASS VALVE	Yes (Built-in)
POWER WATT	550
MAX. PRESSURE	43 PSI
MATERIAL	Cast Iron Body
WEIGHT	12 lbs

**DIESEL**  
**DI**

## ELECTRIC FUEL PUMP 12V - UP TO 16 GPM

### TECHNICAL DATA

SKU	350013
VOLTAGE	12V
FREE FLOW RATE	Up to 16 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	40 / 40 Min.
RPM	3200
BY-PASS VALVE	Yes (Built-in)
POWER WATT	336
MAX. PRESSURE	43 PSI
MATERIAL	Cast Iron Body
WEIGHT	12 lbs



**350013**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

## ELECTRIC FUEL PUMP 12V - UP TO 11 GPM

DIESEL  
**DI**

### TECHNICAL DATA

SKU	350012
VOLTAGE	12V
FREE FLOW RATE	Up to 11 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	40 / 40 Min.
RPM	3200
BY-PASS VALVE	Yes (Built-in)
POWER WATT	264
MAX. PRESSURE	40 PSI
MATERIAL	Cast Iron Body
WEIGHT	9 lbs



### 350012

#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities


## ELECTRIC FUEL PUMP 12V - UP TO 13 GPM

GASOLINE  
**G**  
DIESEL  
**DI**  
KEROSENE  
**K**



### TECHNICAL DATA

SKU	301301
VOLTAGE	12V
FREE FLOW RATE	Up to 13 GPM
TO BE USED WITH	Gasoline, Diesel and Kerosene
INLET THREAD	1" NPT(f) Flanged
OUTLET THREAD	1" NPT(f) Flanged
MAX. HEIGHT SUCTION	7 ft
DUTY CYCLE (ON/OFF)	30 / 30 Min.
RPM	2700
BY-PASS VALVE	Yes (Built-in)
POWER WATT	250
MAX. AMP.	21
MATERIAL	Cast Iron Body
WEIGHT	15 lbs

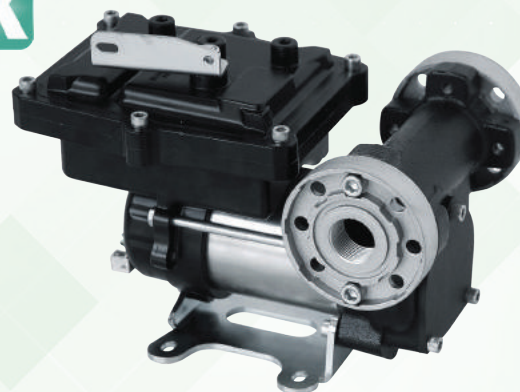

### 301301

#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**350242**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fleet service facilities
- Service shops



## ELECTRIC FUEL PUMP 12V - UP TO 18 GPM

### TECHNICAL DATA


SKU	350242
VOLTAGE	12V
FREE FLOW RATE	Up to 18 GPM
TO BE USED WITH	Diesel
INLET THREAD	1" NPT(f)
OUTLET THREAD	1" NPT(f)
MAX. HEIGHT SUCTION	10 ft
DUTY CYCLE (ON/OFF)	20 / 20 Min.
RPM	2700
BY-PASS VALVE	Yes (Built-in)
POWER WATT	250
MAX. PRESSURE	43 PSI
MATERIAL	Cast Iron Body
WEIGHT	7 lbs



## ELECTRIC FUEL PUMP 12V - UP TO 15 GPM

### TECHNICAL DATA

SKU	301603-1
VOLTAGE	12V
FREE FLOW RATE	Up to 15 GPM
TO BE USED WITH	Gasoline, Diesel and Kerosene
INLET THREAD	1" NPT(f) with 2" Bung Adapter
OUTLET THREAD	3/4" NPT(f)
DUTY CYCLE (ON/OFF)	30 / 30 Min.
BY-PASS VALVE	Yes (Built-in)
MATERIAL	Aluminum Body
WEIGHT	10 lbs

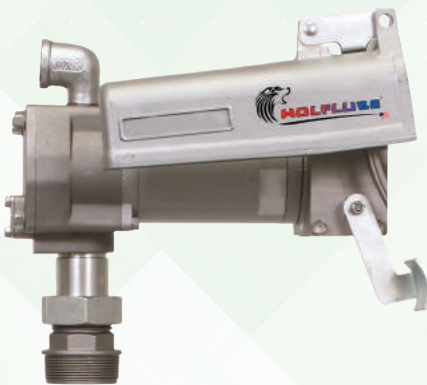

**301603-1**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

## DIAPHRAGM PUMP ALUMINUM - 1/2" FREE FLOW RATE 14.5 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

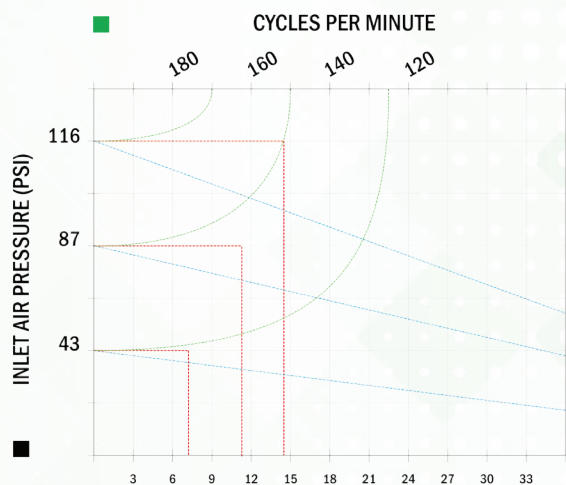

AIR CONSUMPTION (CFM)





OUTLET OIL FREE FLOW RATE (GPM)  
(OIL 10W 30 - 68° F)

\* Based on height up to 20 ft



EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 231201



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA


SKU	231201	MAX. VISCOSITY	20.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	1/2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	14.5 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	13 CFM	DIAPHRAGM MATERIAL	Hytelr + PTFE
NOISE	68 dB	WEIGHT	11 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP ALUMINUM - 3/4" FREE FLOW RATE 29 GPM

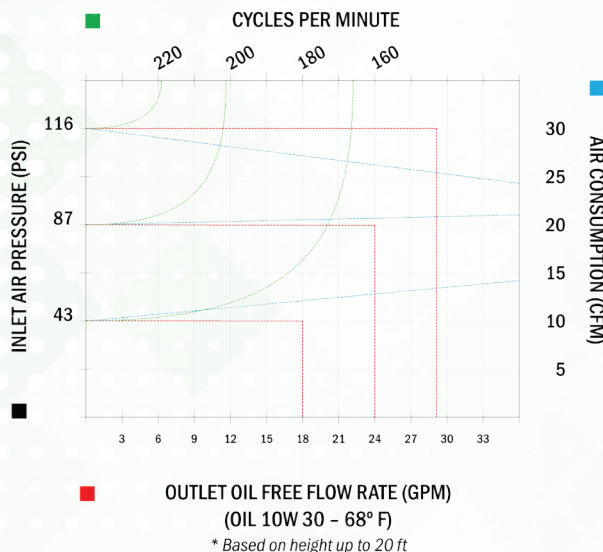

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 233401



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	233401	<b>MAX. VISCOSITY</b>	25.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	1/8"
<b>FLUID INLET</b>	3/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	3/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/8" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	29 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	24 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	72 dB	<b>WEIGHT</b>	16 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP ALUMINUM - 1" FREE FLOW RATE 45 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES


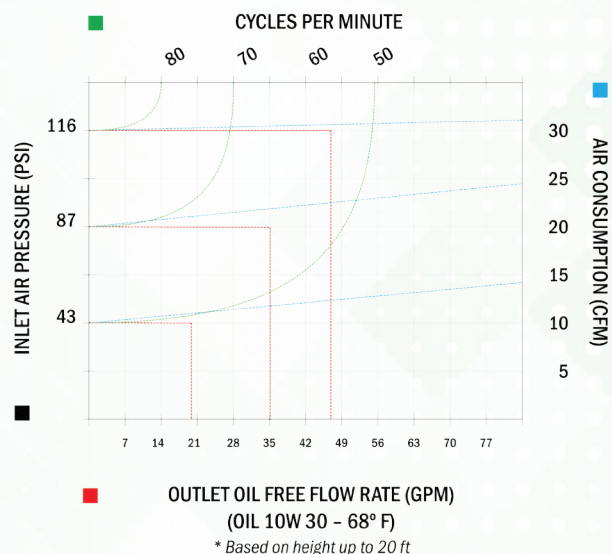


EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 231001

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



### TECHNICAL DATA

<b>SKU</b>	231001	<b>MAX. VISCOSITY</b>	35.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/2" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	45 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	31 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytel + PTFE
<b>NOISE</b>	75 dB	<b>WEIGHT</b>	36 lbs


These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.






## DIAPHRAGM PUMP ALUMINUM - 1.1/4” FREE FLOW RATE 66 GPM

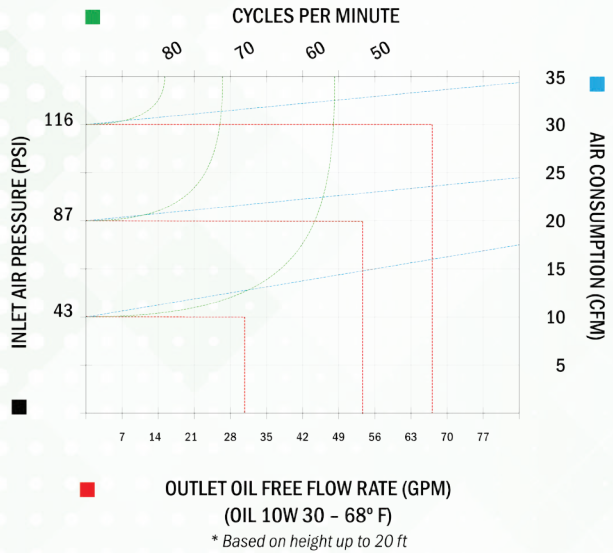

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 231141



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	231141	<b>MAX. VISCOSITY</b>	35.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/2" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	66 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	35 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	75 dB	<b>WEIGHT</b>	36 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP ALUMINUM - 1.1/2" FREE FLOW RATE 105 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES


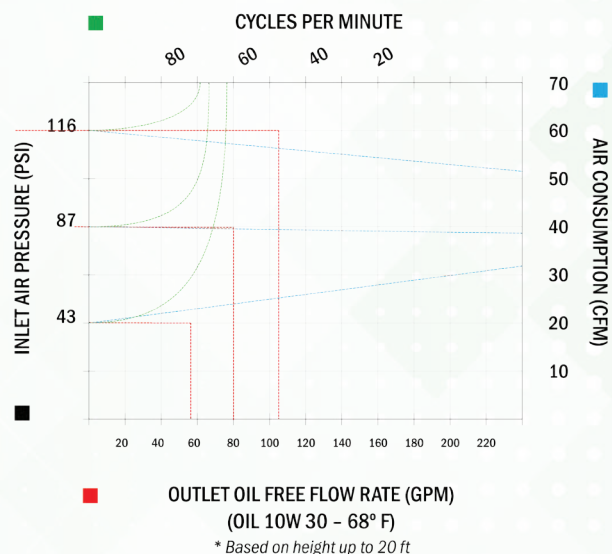


EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 231121

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining



### TECHNICAL DATA


SKU	231121	MAX. VISCOSITY	50.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1.1/2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1.1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	3/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	105 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	52 CFM	DIAPHRAGM MATERIAL	Hytrek + PTFE
NOISE	78 dB	WEIGHT	49 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP ALUMINUM - 2" FREE FLOW RATE 185 GPM

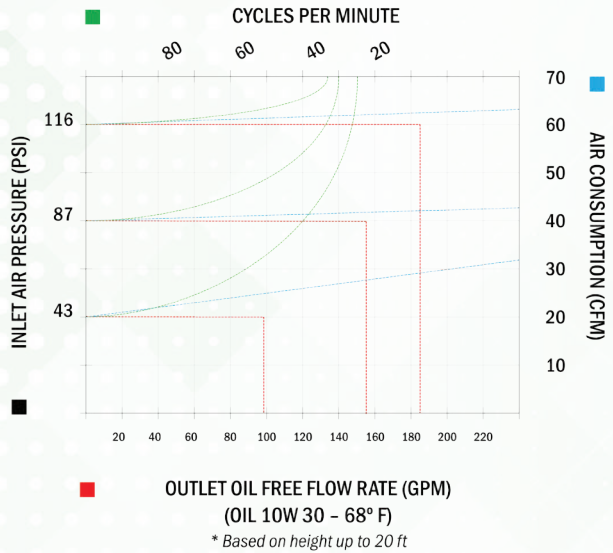

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 232001



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	232001	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	185 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	65 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	80 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1/2" FREE FLOW RATE 14.5 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

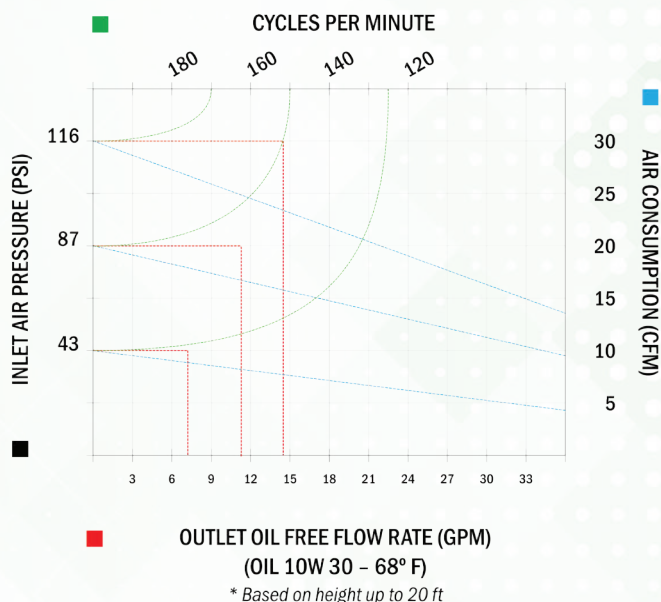


EX II 3/3 GD c IIB T 275F<sup>0</sup> ATEX zone 2

### 221205

#### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

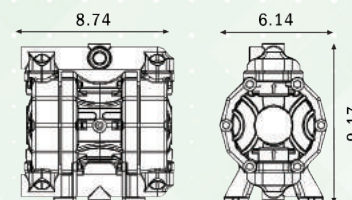

#### TECHNICAL DATA


SKU	221205	MAX. VISCOSITY	20.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	1/2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	14.5 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	29 PSI to 116 PSI	DIAPHRAGM MATERIAL	Hytelr + PTFE
NOISE	68 dB	WEIGHT	10 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP POLYPROPYLENE - 3/4" FREE FLOW RATE 29 GPM

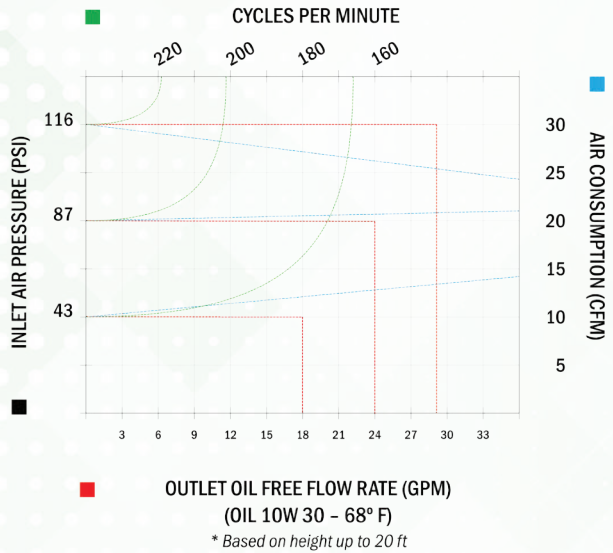

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 223401



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	223401	<b>MAX. VISCOSITY</b>	25.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	1/8"
<b>FLUID INLET</b>	3/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	3/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/8" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	29 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	24 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	72 dB	<b>WEIGHT</b>	16 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1" FREE FLOW RATE 45 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

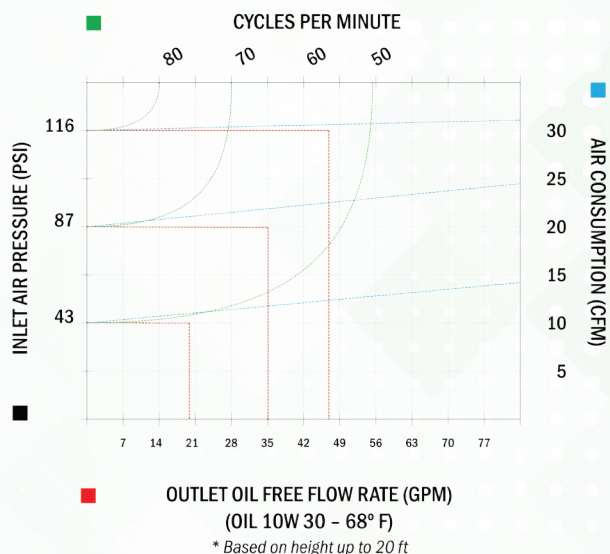


EX II 3/3 GD c IIB T 275F<sup>0</sup> ATEX zone 2

### 221001

#### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

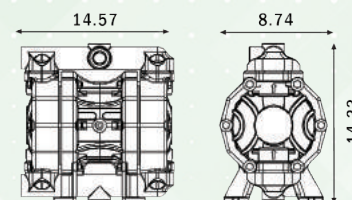

#### TECHNICAL DATA


SKU	221001	MAX. VISCOSITY	35.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	45 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	31 CFM	DIAPHRAGM MATERIAL	Hytrek + PTFE
NOISE	75 dB	WEIGHT	36 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP POLYPROPYLENE - 1.1/4" FREE FLOW RATE 66 GPM

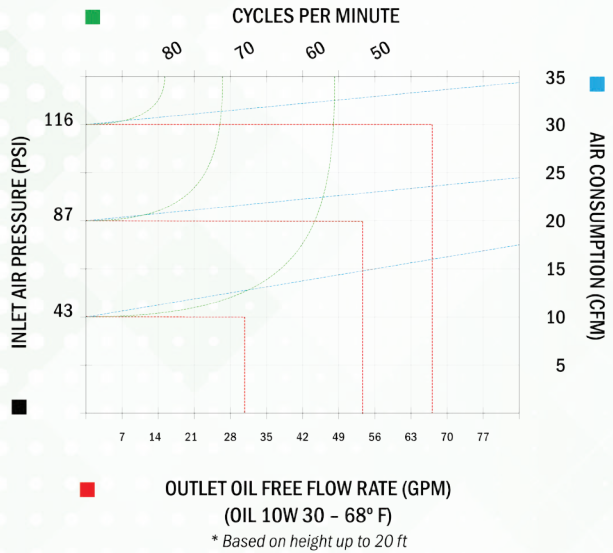

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 221141



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	221141	<b>MAX. VISCOSITY</b>	35.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/2" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	66 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	35 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	75 dB	<b>WEIGHT</b>	36 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1.1/2" FREE FLOW RATE 105 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS



MANUAL PUMPS

ACCESSORIES

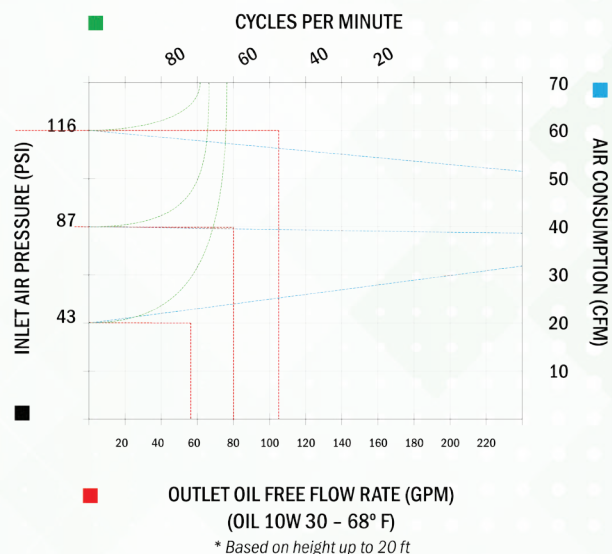

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 221121



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	221121	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	105 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	52 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrek + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	49 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES


METERS

MANUAL PUMPS

ACCESSORIES





## DIAPHRAGM PUMP POLYPROPYLENE - 2" FREE FLOW RATE 185 GPM

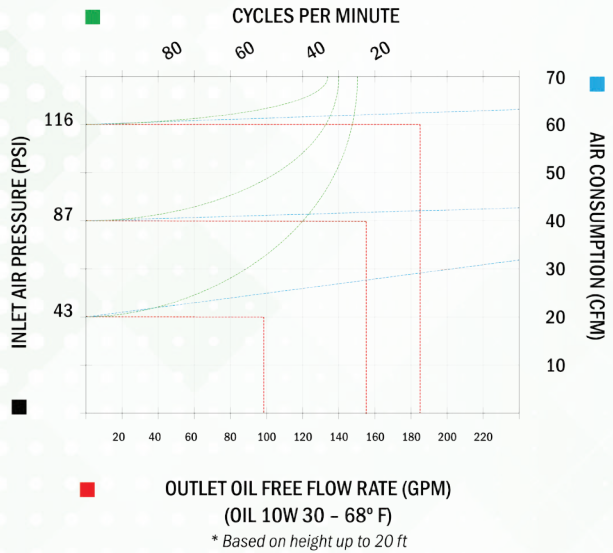

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 222001



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Diesel transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	222001	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	185 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	65 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	80 lbs

These pumps are recommended for the use of transferring diesel for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIESEL DISPENSING KIT 220V - UP TO 16 GPM

DIESEL  
DI

### TECHNICAL DATA

SKU	350074
VOLTAGE	220V
PUMP	350220 - 220V Diesel Pump - 16 GPM
METER	350219 - Mechanical Meter
NOZZLE	302910 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WALL BRACKET	350070 - Wall Bracket
WEIGHT	38 lbs



**350074**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

## DIESEL DISPENSING KIT 220V - UP TO 15 GPM

DIESEL  
DI

### TECHNICAL DATA

SKU	354220
VOLTAGE	220V
PUMP	352220 - 220V Diesel Pump - 15 GPM
METER	350219 - Mechanical Meter
NOZZLE	302910 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WALL BRACKET	350070 - Wall Bracket
WEIGHT	35 lbs



**354220**

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES

PUMPS

KITS



**350073**

**DIESEL**

## DIESEL DISPENSING KIT 110V - UP TO 16 GPM

### TECHNICAL DATA

SKU	350073
VOLTAGE	110V
PUMP	350110 - 110V Diesel Pump - 16 GPM
METER	350219 - Mechanical Meter
NOZZLE	302910 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WALL BRACKET	350070 - Wall Bracket
WEIGHT	38 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**354110**

**DIESEL**

## DIESEL DISPENSING KIT 110V - UP TO 15 GPM

### TECHNICAL DATA

SKU	354110
VOLTAGE	110V
PUMP	352110 - 110V Diesel Pump - 15 GPM
METER	350219 - Mechanical Meter
NOZZLE	302910 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WALL BRACKET	350070 - Wall Bracket
WEIGHT	35 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

## FUEL DISPENSING KIT WITH METER - 110V - UP TO 13 GPM

### TECHNICAL DATA

SKU	301701
VOLTAGE	110V
PUMP	301302 - 110V Fuel Pump - 13 GPM
METER	350219 - Mechanical Meter
NOZZLE	302912 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
DOWN TUBE	Telescopic Down Tube
WEIGHT	32 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities



**301701**

## FUEL DISPENSING KIT 110V - UP TO 13 GPM

### TECHNICAL DATA

SKU	301601
VOLTAGE	110V
PUMP	301302 - 110V Fuel Pump - 13 GPM
METER	(Without Meter)
NOZZLE	302912 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
DOWN TUBE	Telescopic Down Tube
WEIGHT	30 lbs

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities



**301601**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



## 350072

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

**DIESEL**

## DIESEL DISPENSING KIT 12V - UP TO 16 GPM

### TECHNICAL DATA

SKU	350072
VOLTAGE	110V
PUMP	350013 - 12V Diesel Pump - 16 GPM
METER	350219 - Mechanical Meter
NOZZLE	302910 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WALL BRACKET	350070 - Wall Bracket
WEIGHT	34 lbs



## 350071

### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

**DIESEL**

## DIESEL DISPENSING KIT 12V - UP TO 18 GPM

### TECHNICAL DATA

SKU	350071
VOLTAGE	12V
PUMP	350242 - 12V Diesel Pump - 18 GPM
METER	350219 - Mechanical Meter
NOZZLE	302910 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WALL BRACKET	350070 - Wall Bracket
WEIGHT	30 lbs

## WALL MOUNTED DIESEL KIT 12V - UP TO 18 GPM



### TECHNICAL DATA

SKU	350312
VOLTAGE	12V
PUMP	350242 - 12V Fuel Pump - 18 GPM
METER	350219 - Mechanical Meter
NOZZLE	302912 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WEIGHT	31 lbs

### Typical Applications

- Automotive dealerships
- Fleet service facilities
- Service shops
- Farm/Agriculture

**350312**

## FUEL DISPENSING KIT WITH METER - 12V - UP TO 13 GPM



### TECHNICAL DATA

SKU	301702
VOLTAGE	12V
PUMP	301301 - 110V Fuel Pump - 13 GPM
METER	350219 - Mechanical Meter
NOZZLE	302912 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
DOWN TUBE	Telescopic Down Tube
WEIGHT	32 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Farm/Agriculture



**301702**

## FUEL DISPENSING KIT 12V - UP TO 13 GPM



### TECHNICAL DATA

SKU	301602
VOLTAGE	12V
PUMP	301301 - 110V Fuel Pump - 13 GPM
METER	(Without Meter)
NOZZLE	302912 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
DOWN TUBE	Telescopic Down Tube
WEIGHT	30 lbs

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Farm/Agriculture



**301602**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**301604**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Farm/Agriculture



## FUEL DISPENSING KIT 12V - UP TO 15 GPM

### TECHNICAL DATA

SKU	301604
VOLTAGE	12V
PUMP	301603-1 - 12V Fuel Pump - 15 GPM
METER	350219 - Mechanical Meter
NOZZLE	302802 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
DOWN TUBE	Telescopic Down Tube
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	38 lbs



**301603**



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fleet service facilities
- Service shops
- Farm/Agriculture



## FUEL DISPENSING KIT 12V - UP TO 15 GPM

### TECHNICAL DATA

SKU	301603
VOLTAGE	12V
PUMP	301603-1 - 12V Fuel Pump - 15 GPM
METER	(Without Meter)
NOZZLE	302802 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
DOWN TUBE	Telescopic Down Tube
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	38 lbs



**350033**

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fleet service facilities
- Farm/Agriculture
- Service shops




## DIESEL DISPENSING KIT 12V - UP TO 16 GPM

### TECHNICAL DATA

SKU	350033
VOLTAGE	12V
PUMP	350013 - 12V Diesel Pump - 16 GPM
NOZZLE	302802 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WEIGHT	20 lbs

## DIESEL DISPENSING KIT 12V - UP TO 11 GPM

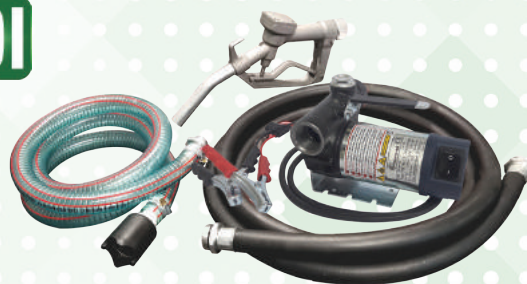

### 350032

#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

#### TECHNICAL DATA

SKU	350032
VOLTAGE	12V
PUMP	350012 - 12V Diesel Pump - 11 GPM
NOZZLE	302802 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WEIGHT	17 lbs

## DIESEL DISPENSING KIT 12V - UP TO 18 GPM



### 350240

#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

#### TECHNICAL DATA

SKU	350240
VOLTAGE	12V
PUMP	350242 - 12V Diesel Pump - 18 GPM
NOZZLE	302802 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WEIGHT	15 lbs

## DIESEL DISPENSING KIT 24V - UP TO 18 GPM



### 350241

#### Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Heavy-duty dealerships
- Service shops
- Fleet service facilities

#### TECHNICAL DATA

SKU	350241
VOLTAGE	24V
PUMP	350004 - 24V Diesel Pump - 18 GPM
NOZZLE	302802 - 3/4" Nozzle
DISPENSING HOSE	340130 - 3/4" 13 ft Hose
SUCTION HOSE	340060 - 3/4" 6 ft Hose
WEIGHT	15 lbs

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



## SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.


## SELECTING HOSE REELS

The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.

## SIZES AND CAPACITY


<b>MODEL F550</b>	Up to 50ft 3/4" or Up to 30ft 1"
<b>MODEL F555</b>	Up to 65ft 3/4" or Up to 50ft 1"
<b>MODEL F560</b>	Up to 100ft 3/4" or Up to 100ft 1"

## HOSE REEL INSTALLATIONS

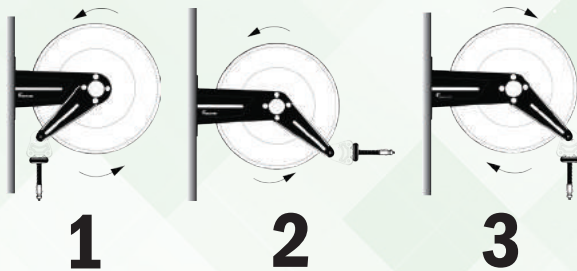


### WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 2 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.

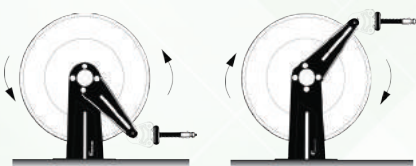

### BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.



### CEILING

Ceiling installations are the same as the wall mounted 2 set up.


## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- VITON SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **145 PSI**

Hose reels, with hose, are equipped with a black Wolflube wire reinforced smooth hose and zinc plated steel fittings NPT(f) x NPT(m). Resuable fitting also available.



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
350213	F550	1" NPT(f)	1" NPT(m)	Without hose	-	49 lbs
350101	F550	1" NPT(f)	3/4" NPT(m)	30 ft	3/4"	63 lbs
350102	F550	1" NPT(f)	3/4" NPT(m)	50 ft	3/4"	70 lbs
350103	F550	1" NPT(f)	1" NPT(m)	30 ft	1"	68 lbs
350214	F555	1" NPT(f)	1" NPT(m)	Without hose	-	58 lbs
350104	F555	1" NPT(f)	3/4" NPT(m)	65 ft	3/4"	83 lbs
350105	F555	1" NPT(f)	1" NPT(m)	50 ft	1"	89 lbs
350215	F560	1" NPT(f)	1" NPT(m)	Without hose	-	74 lbs
350106	F560	1" NPT(f)	3/4" NPT(m)	100 ft	3/4"	115 lbs
350107	F560	1" NPT(f)	3/4" NPT(m)	130 ft	3/4"	126 lbs
350108	F560	1" NPT(f)	1" NPT(m)	65 ft	1"	114 lbs
350109	F560	1" NPT(f)	1" NPT(m)	100 ft	1"	134 lbs

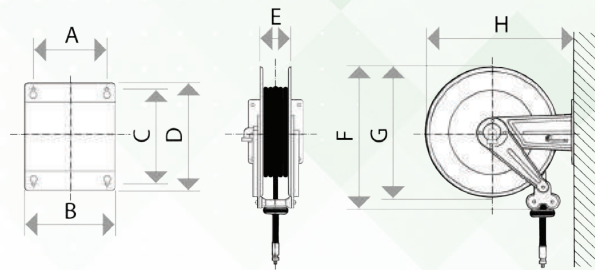

MODEL	A	B	C	D	E	F	G	H
F550	7.9"	5.9"	8.9"	10.7"	4.8"	23.3"	21.7"	23.7"
F555	9.9"	7.9"	8.9"	10.7"	6.7"	23.3"	21.7"	23.7"
F560	17.4"	15.4"	8.9"	10.7"	14.2"	23.3"	21.7"	23.7"

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



## FEATURES:

- WIRE REINFORCED SMOOTH HOSE
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
  - 3/4" THREAD FOR 1" HOSE
  - 1" THREAD FOR 3/4" HOSE

### ALSO AVAILABLE :

- 1" REUSABLE FITTING NPT(m)
- 3/4" REUSABLE FITTING NPT(m)

### Approximately Weight per Foot

3/4"	1"
+ - 6.3 oz	+ - 8.9 oz

## CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
350201	3/4"	260 PSI	780 PSI	30 ft	NPT(m) 3/4" x NPT(f) 3/4"
350202	3/4"	260 PSI	780 PSI	50 ft	NPT(m) 3/4" x NPT(f) 3/4"
350203	3/4"	260 PSI	780 PSI	65 ft	NPT(m) 3/4" x NPT(f) 3/4"
350204	3/4"	260 PSI	780 PSI	100 ft	NPT(m) 3/4" x NPT(f) 3/4"
350205	3/4"	260 PSI	780 PSI	130 ft	NPT(m) 3/4" x NPT(f) 3/4"
350206	1"	260 PSI	780 PSI	30 ft	NPT(m) 1" x NPT(f) 1"
350207	1"	260 PSI	780 PSI	50 ft	NPT(m) 1" x NPT(f) 1"
350208	1"	260 PSI	780 PSI	65 ft	NPT(m) 1" x NPT(f) 1"
350209	1"	260 PSI	780 PSI	100 ft	NPT(m) 1" x NPT(f) 1"

## CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
340040	3/4"	260 PSI	780 PSI	4 ft	NPT(m) 3/4" x NPT(m) 3/4"
340060	3/4"	260 PSI	780 PSI	6 ft	NPT(m) 3/4" x NPT(m) 3/4"
340130	3/4"	260 PSI	780 PSI	13 ft	NPT(m) 3/4" x NPT(m) 3/4"
350232	1"	260 PSI	780 PSI	13 ft	NPT(m) 1" x NPT(m) 1"

## AUTOMATIC FUEL NOZZLE - 1" SPOUT

SKU	302901
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**302901**

## AUTOMATIC FUEL NOZZLE - 1" SPOUT

SKU	302902
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**302902**

## AUTOMATIC FUEL NOZZLE - 1" SPOUT

SKU	302903
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**302903**

## AUTOMATIC FUEL NOZZLE - 3/4" SPOUT

SKU	302910
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



**302910**

## AUTOMATIC FUEL NOZZLE - 3/4" SPOUT

SKU	302911
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



**302911**

## AUTOMATIC FUEL NOZZLE - 3/4" SPOUT

SKU	302912
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



**302912**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

**\*\* Do not use the nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without a hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**302904**



### AUTOMATIC FUEL NOZZLE - 1/2" SPOUT

SKU	302904
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302905**



### AUTOMATIC FUEL NOZZLE - 1/2" SPOUT

SKU	302905
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302906**



### AUTOMATIC FUEL NOZZLE - 1/2" SPOUT

SKU	302906
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302907**



### AUTOMATIC FUEL NOZZLE - 1/2" SPOUT

SKU	302907
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302908**



### AUTOMATIC FUEL NOZZLE - 1/2" SPOUT

SKU	302908
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302909**



### AUTOMATIC FUEL NOZZLE - 1/2" SPOUT

SKU	302909
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")

\*\* Do not use the nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without a hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.

## AUTOMATIC FUEL NOZZLE - 1" SPOUT NO PRESSURE NO FLOW

SKU	350236
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**350236**

## AUTOMATIC FUEL NOZZLE - 1" SPOUT NO PRESSURE NO FLOW

SKU	350237
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**350237**

## AUTOMATIC FUEL NOZZLE - 1" SPOUT NO PRESSURE NO FLOW

SKU	350238
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**350238**

## AUTOMATIC FUEL NOZZLE - 3/4" SPOUT NO PRESSURE NO FLOW

SKU	350233
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



**350233**

## AUTOMATIC FUEL NOZZLE - 3/4" SPOUT NO PRESSURE NO FLOW

SKU	350234
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



**350234**

## AUTOMATIC FUEL NOZZLE - 3/4" SPOUT NO PRESSURE NO FLOW

SKU	350235
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



**350235**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**350245**



### AUTO. FUEL NOZZLE WITH HOOK - 1" SPOUT

SKU	350245
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**350246**



### AUTO. FUEL NOZZLE WITH HOOK - 1" SPOUT

SKU	350246
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**350247**



### AUTO. FUEL NOZZLE WITH HOOK - 1" SPOUT

SKU	350247
MATERIAL	Aluminum
FLOW RATE	Up to 26.5 GPM
MAX. WORKING PRESSURE	35 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



**302913**



### AUTO. FUEL NOZZLE WITH HOOK - 1/2" SPOUT

SKU	302913
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302914**



### AUTO. FUEL NOZZLE WITH HOOK - 1/2" SPOUT

SKU	302914
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



**302915**



### AUTO. FUEL NOZZLE WITH HOOK - 1/2" SPOUT

SKU	302915
MATERIAL	Aluminum
FLOW RATE	Up to 11 GPM
MAX. WORKING PRESSURE	25 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")

**\*\* Do not use the nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without a hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.**

## AUTOMATIC FUEL NOZZLE - 1.1/2" SPOUT

SKU	350225
MATERIAL	Aluminum
FLOW RATE	Up to 132 GPM
MAX. WORKING PRESSURE	75 PSI
INLET	1.1/2" NPT(f)
OUTLET (SPOUT)	1.1/2"



**350225**

## AUTOMATIC FUEL NOZZLE - COUPLER

SKU	350224
MATERIAL	Aluminum
FLOW RATE	Up to 132 GPM
MAX. WORKING PRESSURE	75 PSI
INLET	1.1/2" NPT(f)
OUTLET (SPOUT)	1.1/2"



**350224**

## AUTOMATIC FUEL NOZZLE - 1.1/2" SPOUT

SKU	350260
MATERIAL	Aluminum
FLOW RATE	Up to 74 GPM
MAX. WORKING PRESSURE	70 PSI
INLET	1.1/2" NPT(f)
OUTLET (SPOUT)	1.1/2"



**350260**

## DIGITAL PRESET CONTROL HANDLE

### TECHNICAL DATA

SKU	260062
FLOW RATE	Up to 8 GPM
MAX. WORKING PRESSURE	1,000 PSI
INLET	1/2" NPT(f) with Swivel
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MIN. PRESET QTY.	0.10 Unit
MAX. PRESET QTY.	99.9 Unit
MAX. VISCOSITY	5,000 CST
WATER RESISTANCE	IP55
MEASURING SYSTEM	Oval Gear



**260062**

### Typical Applications

- Automotive dealerships
- Service shops
- Lube trucks
- Fleet service facilities
- Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application

\* Due to the viscosity, to use with Diesel the calibration must be redone.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

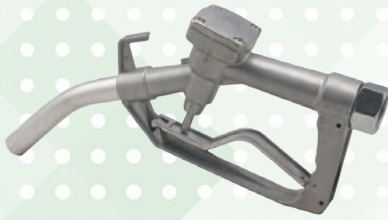

### 302801



#### MANUAL FUEL NOZZLE - 3/4" SPOUT

SKU	302801
MATERIAL	Aluminum
FLOW RATE	Up to 20 GPM
MAX. WORKING PRESSURE	50 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



### 302802



#### MANUAL FUEL NOZZLE - 3/4" SPOUT

SKU	302802
MATERIAL	Aluminum
FLOW RATE	Up to 15 GPM
MAX. WORKING PRESSURE	50 PSI
INLET	3/4" NPT(f)
OUTLET (SPOUT)	3/4" (15/16")



### 302702



#### MANUAL FUEL NOZZLE - 1" SPOUT

SKU	302702
MATERIAL	Aluminum
FLOW RATE	Up to 40 GPM
MAX. WORKING PRESSURE	180 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1" (1.1/16")



### 302701



#### MANUAL FUEL NOZZLE - 1/2" SPOUT

SKU	302701
MATERIAL	Aluminum
FLOW RATE	Up to 40 GPM
MAX. WORKING PRESSURE	180 PSI
INLET	1" NPT(f)
OUTLET (SPOUT)	1/2" (13/16")



### 302705



#### MANUAL FUEL NOZZLE - 3/4" SPOUT

SKU	302705
MATERIAL	Acetal
FLOW RATE	Up to 13 GPM
INLET	3/4" Barb Fitting
OUTLET (SPOUT)	3/4" (15/16")

\*\* Do not use the nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without a hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.

## DIGITAL OIL METER - 3/4"

### TECHNICAL DATA

SKU	250505
FLOW RATE	Up to 21 GPM
MAX. WORKING PRESSURE	725 PSI
INLET / OUTLET	3/4" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	1 x CR2 (3V)
MAX. WORKING TEMP.	122° F



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Mining
- Industrial application



**250505**

## DIGITAL DIESEL METER - 1"

### TECHNICAL DATA

SKU	359005
FLOW RATE	Up to 50 GPM
MAX. WORKING PRESSURE	290 PSI
INLET / OUTLET	1" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	2 x AAA Battery
MAX. WORKING TEMP.	120° F



### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



**359005**

## DIGITAL FUEL METER - 1"

### TECHNICAL DATA

SKU	359000
FLOW RATE	Up to 32 GPM
ACCURACY	+/- 1%
MAX. WORKING PRESSURE	300 PSI
BURST PRESSURE	580 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(m)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
RESETTABLE BATCH - TOTAL	99,999 Units
NON-RESETTABLE BATCH - TOTAL	999,999 Units
WATER RESISTANCE	Ip55
BATTERY	2 x AAA Battery
MAX. WORKING TEMP.	122° F




### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Mining
- Industrial application



**359000**

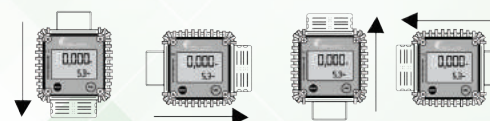

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**350219**

**DIESEL DI**

## MECHANICAL DIESEL METER - 4 DIGITS

### TECHNICAL DATA

SKU	350219
FLOW RATE	Up to 32 GPM
MAX. WORKING PRESSURE	142 PSI
BURST PRESSURE	435 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(f)
ACCURACY	+/- 1%
MATERIAL	Aluminum
MEASURING UNIT	Gallon
RESETTABLE BATCH	4 Digits
NON-RESETTABLE BATCH	7 Digits



**350221**

**DIESEL DI**

## MECHANICAL DIESEL METER - 3 DIGITS

### TECHNICAL DATA

SKU	350221
FLOW RATE	Up to 32 GPM
MAX. WORKING PRESSURE	142 PSI
BURST PRESSURE	435 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(f)
ACCURACY	+/- 1%
MATERIAL	Aluminum
MEASURING UNIT	Gallon
RESETTABLE BATCH	3 Digits
NON-RESETTABLE BATCH	6 Digits



**350216**

**GASOLINE G**

**DIESEL DI**

**KEROSENE K**

## MECHANICAL FUEL METER ATEX - 3 DIGITS

### TECHNICAL DATA

SKU	350216
FLOW RATE	Up to 32 GPM
MAX. WORKING PRESSURE	142 PSI
BURST PRESSURE	435 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(f)
ACCURACY	+/- 1%
MATERIAL	Aluminum
MEASURING UNIT	Gallon
RESETTABLE BATCH	3 Digits
NON-RESETTABLE BATCH	6 Digits

## MANUAL OIL PUMP DOUBLE DIAPHRAGM FOR 55 GAL DRUM



### Product Brief

The heavy-duty fuel transfer pump is ideal to use where compressed air/electricity is not easily available such as farms/ranches, construction sites, boats, etc. Stainless Steel piston and fuel resistant nitrile rubber diaphragm include a 2" die cast bung adaptor and extra heavy-duty steel handle with security locking latch. Pump inlet fitted with easy to clean wire mesh screen. Complete with a telescopic suction tube with a non-return valve to use on 16 gallons to 55 gallons drum.

### WETTED COMPONENTS

Aluminum, Steel, Stainless Steel, Poly Acetal & NBR.

### RECOMMENDED USE


Gasoline, Diesel fuel, Fuel Oil, Motor Oil & other light petroleum products.

### DO NOT USE

With Corrosive liquids, solvents, acids, alkalis etc.

### TECHNICAL DATA

SKU	300101
FLOW RATE	Up to 1 GAL per 5 strokes

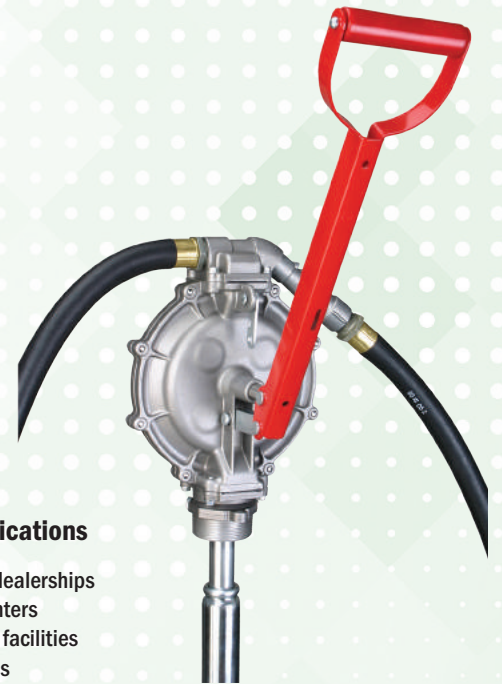

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



## 300101

## MANUAL OIL PUMP ROTARY - PROFESSIONAL FOR 55 GAL DRUM



### Product Brief

Rotary barrel pump with aluminum die-cast pump body, heavy-duty zinc die-cast rotor and vanes ideal for usage in industrial and automotive applications. Includes a 2" cast iron bung adaptor and die-cast aluminum handle with security locking latch. Complete with a 3-pc threaded suction tube for use on 16 gallons to 55 gallons drum.

### WETTED COMPONENTS

Aluminum, Zinc, Steel, NBR/Viton & PVC.

### RECOMMENDED USE

Gasoline, Diesel fuel, Kerosene, & Lubricating oils up to SAE 60.

### DO NOT USE

With Corrosive liquids, Solvents, Acids, Alkalis etc.

### TECHNICAL DATA

SKU	201201
FLOW RATE	Up to 2.2 oz per stroke



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



## 201201

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**201001**



**Typical Applications**

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

**SUITABLE FOR :**



## MANUAL OIL PUMP - LEVER ACTION - FOR 55 GAL DRUM

**Product Brief**

Most popular pump design, engineered for professional use with premium powder-coated steel pump body and ribbed section aluminum die-cast pump head for maximum strength. Built-in 1.1/2" and 2" bung for use on drums with either opening plated steel lever handle with rubber grip for convenience. Wear-resistant brass piston rings fitted onto zinc die-cast piston. Comes complete with curved metal spout and telescopic suction tube for use on 16 gallon - 55 gallons drums.

**WETTED COMPONENTS**

Steel, Aluminum, Zinc, Brass, NBR.

**RECOMMENDED USE**

Antifreeze, solvents, thinners, automotive additives, oil based fluids & other non corrosive liquids.

**DO NOT USE**

Gasoline and water based & other corrosive fluids.

**TECHNICAL DATA**

SKU	201001
FLOW RATE	Up to 10 oz per stroke



**300401**



**Typical Applications**

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

**SUITABLE FOR :**



## MANUAL OIL PUMP - LEVER ACTION - FOR 55 GAL DRUM

**Product Brief**

An extremely rugged and strong all-steel pump designed specifically for use with Diesel and E85 fuels. Constructed from select materials which are compatible with Biodiesel and E85 fuel. Fracture proof design with steel pump head and bung. Extra-long pump body makes it easy to place refill containers on the drum for convenient dispensing. Comes complete with curved metal spout and telescopic suction tube for use on 16 gallon - 55 gallons drums.

**WETTED COMPONENTS**

Steel, Viton & PTFE.

**RECOMMENDED USE**

Oil based fluids, Bio Diesel & E85 fuels.

**DO NOT USE**

With Corrosive fluids, solvents, acids, alkalis etc.

**TECHNICAL DATA**

SKU	300401
FLOW RATE	Up to 10 oz per stroke

## MANUAL OIL PUMP - ROTARY FOR 55 GAL DRUM

### Product Brief

The industry standard rotary pumps; these are by far the heaviest duty pumps, ideal for tough outdoor use in extreme weather conditions. Solid cast iron construction, fully CNC machined to close tolerances. Pump handle rotates a high-quality sintered powder metal, 3 vane rotors inside a highly finished pumping chamber. Graphite Vanes are self-lubricating and non-wearing. High-quality graphite seal, self-priming, supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 16 gallon - 55 gallons drums.

### WETTED COMPONENTS

Cast Iron, Steel, Graphite, Paper, Polypropylene.

### RECOMMENDED USE

Petroleum base fluids, Diesel & Kerosene.

### DO NOT USE

With water based fluids.

#### TECHNICAL DATA

SKU	300201
FLOW RATE	Up to 10 GPM
HOSE	8 ft - 3/4" with Spout



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**300201**

## MANUAL OIL PUMP - ROTARY FOR 55 GAL DRUM

### Product Brief

The industry standard rotary pumps; these are by far the heaviest duty pumps, ideal for tough outdoor use in extreme weather conditions. Solid cast iron construction, fully CNC machined to close tolerances. Pump handle rotates a high-quality sintered powder metal, 3 vane rotors inside a highly finished pumping chamber. Graphite Vanes are self-lubricating and non-wearing. High-quality graphite seal, self-priming, supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 16 gallon - 55 gallons drums.

### WETTED COMPONENTS

Cast Iron, Steel, Graphite, Paper, Polypropylene.

### RECOMMENDED USE

Petroleum base fluids, Diesel & Kerosene.

### DO NOT USE

With water based fluids.

#### TECHNICAL DATA

SKU	300301
FLOW RATE	Up to 10 GPM



### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :



**300301**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

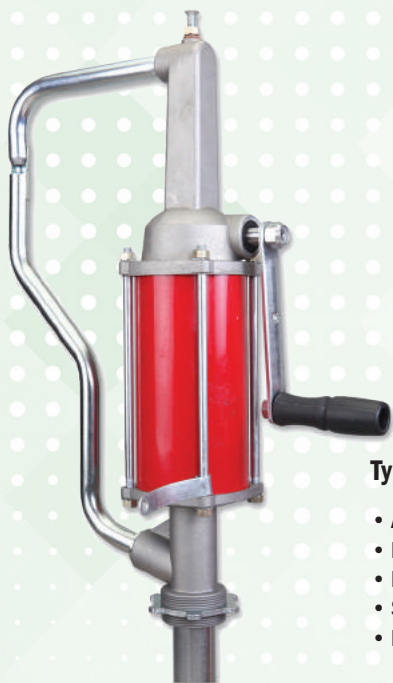

**201801**

DIESEL **DI**

KEROSENE **K**

OIL **O**

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### SUITABLE FOR :



## MANUAL OIL PUMP QUART / STROKE FOR 55 GAL DRUM

### Product Brief

A heavy-duty and economical way to dispense the exact quantity of fluid per stroke. Extremely useful in applications requiring metered delivery, the pump works on a precision rack and pinion mechanism. Pump has a built-in 2" Bung Adaptor and comes complete with a telescopic suction tube for use with 16 gallons - 55 gallons drum. Spring Loaded Drain Back Tube for overflow fluid, a lockable handle which allows the pump to be padlocked when it is not in use, lock nut for positioning the pump outlet in any direction.

#### WETTED COMPONENTS

Steel, Aluminum, Nitrile Rubber & Acetal.

#### RECOMMENDED USE

Gear & Lube Oil, Petroleum based fluid, Diesel & Kerosene.

#### DO NOT USE

With water based & other corrosive fluids.

#### TECHNICAL DATA

SKU	201801
FLOW RATE	Up to 1 Quart per stroke



**201301**

DIESEL **DI**

KEROSENE **K**

OIL **O**

#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### SUITABLE FOR :



## MANUAL OIL PUMP VERTICAL LIFT FOR 55 GAL DRUM

### Product Brief

Self-priming Hi volume Vertical Lift Pump for use with petroleum-based fluids. Steel construction with Aluminum die-cast head, steel plunger rod and PTFE seals. The piston is made from zinc with wear-resistant brass piston rings. Complete with 2" cast iron bung adaptor Tube with Strainer for use with 55 gallons drums.

#### WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass & PTFE.

#### RECOMMENDED USE

High viscosity petroleum based fluids, lacquer thinners.

#### DO NOT USE

With Gasoline, water based & other corrosive fluids.

#### TECHNICAL DATA

SKU	201301
FLOW RATE	Up to 26 oz per stroke

## MANUAL OIL PUMP ROTARY - FOR 55 GAL DRUM



### Product Brief

Most popularly used pump worldwide. This Rotary Pump is superior to any other with features such as Dual Directional Operation which allows the pump to both empty, as well as refill containers. Extremely Heavy Duty, this Pump's body is sturdy cast iron with precisely machined cast iron vanes for better draw and smoother delivery. Fits 16 gallons to 55 gallons drum. Comes complete with a suction tube, 2" cast iron bung adaptor and discharge spout.

### WETTED COMPONENTS

Steel, Cast Iron, NBR.

### RECOMMENDED USE

For dispensing Diesel, Kerosene, Heating Oils, Motor Oils, Lubricating Oils (upto SAE 90), and other non-corrosive fluids.

### DO NOT USE

With water based fluids, Antifreeze, Solvents, Acids, and Gasoline.


### TECHNICAL DATA

SKU	201101
FLOW RATE	Up to 1.3 GAL per 5 strokes

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

### SUITABLE FOR :

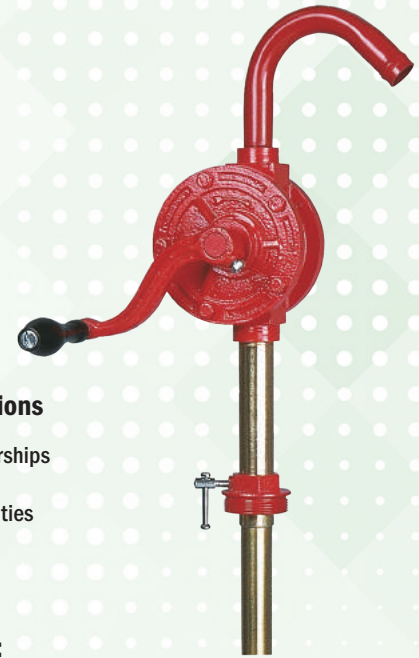

**201101**

## TRANSFER GUN

### Product Brief

Dual Direction Transfer Gun; it draws in and pumps out liquid in a single stroke. Suction Head and piston have an aluminum construction and also use Viton piston rings.

### RECOMMENDED USE

Fuel oils, Mineral oils, Synthetic & Biological oils, Petrol, Cooling liquids, Water, Antifreeze, Spirits & Brake fluids.

### TECHNICAL DATA

SKU	200701
CAPACITY	12 oz
HOSE	2 pieces of 4 ft clear vinyl hose

## SUCTION GUN

### TECHNICAL DATA

SKU	200601
CAPACITY	16 oz
RECOMMENDED USE	Non corrosive liquids
HOSE	12" clear vinyl hose



**200701**



**200601**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**303101**



## SWIVEL CONNECTION 360° STYLE - 3/4"

### TECHNICAL DATA

SKU	303101
MATERIAL	Aluminum
SWIVEL	360°
MAX. WORKING PRESSURE	40 PSI
INLET	3/4" NPT(f)
OUTLET	3/4" NPT(m)



**303102**



## SWIVEL CONNECTION 360° STYLE - 1"

### TECHNICAL DATA

SKU	303102
MATERIAL	Aluminum
SWIVEL	360°
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(m)



**359023**



## SWIVEL CONNECTION 180° STYLE - 3/4"

### TECHNICAL DATA

SKU	359023
MATERIAL	Aluminum
SWIVEL	180°
MAX. WORKING PRESSURE	40 PSI
INLET	3/4" NPT(f)
OUTLET	3/4" NPT(m)



**359025**



## SWIVEL CONNECTION 180° STYLE - 1"

### TECHNICAL DATA

SKU	359025
MATERIAL	Aluminum
SWIVEL	180°
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(m)

## SWIVEL CONNECTION STRAIGHT STYLE - 3/4" x 3/4"

### TECHNICAL DATA

SKU	359010
MATERIAL	Aluminum
SWIVEL	360°
MAX. WORKING PRESSURE	40 PSI
INLET	3/4" NPT(f)
OUTLET	3/4" NPT(m)



**359010**

## SWIVEL CONNECTION STRAIGHT STYLE - 3/4" x 1"

### TECHNICAL DATA

SKU	359011
MATERIAL	Aluminum
SWIVEL	360°
MAX. WORKING PRESSURE	40 PSI
INLET	3/4" NPT(f)
OUTLET	1" NPT(m)



**359011**

## SWIVEL CONNECTION STRAIGHT STYLE - 1" x 3/4"

### TECHNICAL DATA

SKU	359012
MATERIAL	Aluminum
SWIVEL	360°
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	3/4" NPT(m)



**359012**

## SWIVEL CONNECTION STRAIGHT STYLE - 1" x 1"

### TECHNICAL DATA

SKU	359013
MATERIAL	Aluminum
SWIVEL	360°
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(m)



**359013**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**359053**

**DI**  
DIESEL

**G**  
GASOLINE

**K**  
KEROSENE

## BREAKAWAY CONNECTION NON-RECONNECTABLE - 3/4"

### TECHNICAL DATA

SKU	359053
MATERIAL	Aluminum
FLOW RATE	Up to 16 GPM
MAX. WORKING PRESSURE	40 PSI
INLET	3/4" NPT(f)
OUTLET	3/4" NPT(f)



**359055**

**DI**  
DIESEL

**G**  
GASOLINE

**K**  
KEROSENE

## BREAKAWAY CONNECTION NON-RECONNECTABLE - 1"

### TECHNICAL DATA

SKU	359055
MATERIAL	Aluminum
FLOW RATE	Up to 32 GPM
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(f)



**310085**

**DI**  
DIESEL

**K**  
KEROSENE

**O**  
OIL

## FUEL DISPENSER SIGHT GLASS - 3/4"

### TECHNICAL DATA

SKU	310085
MATERIAL	Aluminum
MAX. WORKING PRESSURE	40 PSI
INLET	3/4" NPT(f)
OUTLET	3/4" NPT(m)



**310087**

**DI**  
DIESEL

**K**  
KEROSENE

**O**  
OIL

## FUEL DISPENSER SIGHT GLASS - 1"

### TECHNICAL DATA

SKU	310087
MATERIAL	Aluminum
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(m)

## FUEL FILTER WITH 10 $\mu$ ELEMENT

DIESEL  
GASOLINE  
KEROSENE

### TECHNICAL DATA

SKU	302301
MATERIAL	Aluminum / Plastic
ELEMENT	302402 - 10 $\mu$ Paper Element
MAX. WORKING PRESSURE	150 PSI
FLOW RATE	Up to 27 GPM - 16 GPM @ 25 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(f)



### 302301

\* Do not use with Water based products, Gasohol, Aviation fuels, racing fuels.

## REPLACEMENT FILTER ELEMENT

DIESEL  
GASOLINE  
KEROSENE

### TECHNICAL DATA

SKU	302402
MATERIAL	Paper
MAX. WORKING PRESSURE	150 PSI
FLOW RATE	Up to 27 GPM - 16 GPM @ 25 PSI
INLET	3/4" NPT(m)



### 302402

\* Do not use with Water based products, Gasohol, Aviation fuels, racing fuels.

## DIESEL FILTER WITH 60 $\mu$ WASHABLE ELEMENT

DIESEL

### TECHNICAL DATA

SKU	302500
MATERIAL	Plastic
FLOW RATE	Up to 25 GPM
MAX. WORKING PRESSURE	40 PSI
INLET	1" NPT(f)
OUTLET	1" NPT(f)



### 302500

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**250530**

Usually installed in a mobile trolley or lube truck, the four-way valve drains the wasted oil from the drums which later will be dispensed into a waste oil tank.

After collecting the wasted oil, it is time to transfer it to the wasted oil tank. Everything could be done using the same pump and installation.





## 4 WAY VALVE

### TECHNICAL DATA

SKU	250530
MATERIAL	Aluminum
SEAL	NBR
MAX. WORKING PRESSURE	200 PSI
THREADS SIZES	1" NPT(f)
WEIGHT	23 lbs

Our four-way valve composed with a handle that swings was developed to simplify the suction/discharge process, making it easier to pull and push (transfer) oils, new or used, from one recipient to another. It makes it possible, with only one single pump to operate both procedures suction and dispensing in the same installation.

The images below illustrate both steps, the suction and dispensing process. Using our four-way valve in a mobile or fixed installation can help drain the oil from the first recipient by switching the handle dispenses into the second one.

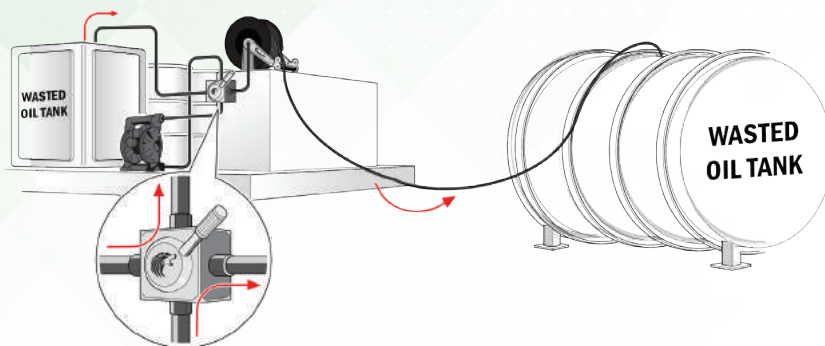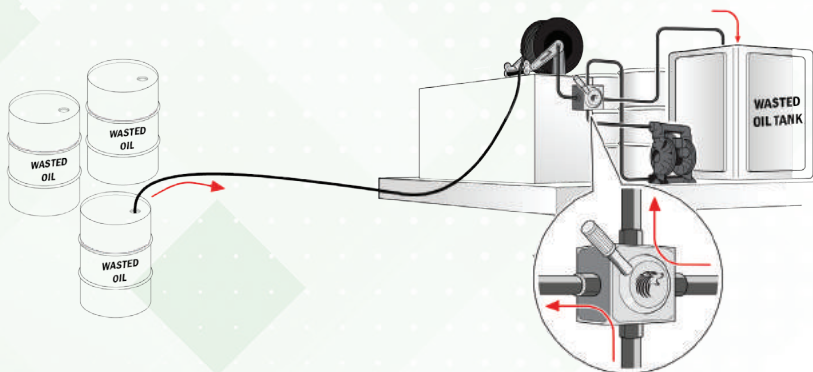

## STEEL FOOT VALVE

### TECHNICAL DATA

SKU	200801
OUTLET	3/4" NPT(f)
MATERIAL	Steel

\* Recommended for custom down tubes and suction hoses.



**200801**

## SPOUT REPLACEMENT 1" (1.1/16")

### TECHNICAL DATA

SKU	303201
MATERIAL	Aluminum
SPOUT Ø	1" (1.1/16")



**303201**

## SPOUT REPLACEMENT 3/4" (15/16")

### TECHNICAL DATA

SKU	303202
MATERIAL	Aluminum
SPOUT Ø	3/4" (15/16")



**303202**

## SPOUT REPLACEMENT 1/2" (13/16")

### TECHNICAL DATA

SKU	303203
MATERIAL	Aluminum
SPOUT Ø	1/2" (13/16")



**303203**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS



**303020**

## FUEL NOZZLE SPLASH GUARD - GREEN FOR SPOUTS 1/2" and 3/4"

### TECHNICAL DATA

SKU	303020
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

KITS



**303021**

## FUEL NOZZLE SPLASH GUARD - RED FOR SPOUTS 1/2" and 3/4"

### TECHNICAL DATA

SKU	303021
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

HOSE REELS



**303022**

## FUEL NOZZLE SPLASH GUARD - BLUE FOR SPOUTS 1/2" and 3/4"

### TECHNICAL DATA

SKU	303022
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

HOSES



**303023**

## FUEL NOZZLE SPLASH GUARD - YELLOW FOR SPOUTS 1/2" and 3/4"

### TECHNICAL DATA

SKU	303023
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

NOZZLES



**303024**

## FUEL NOZZLE SPLASH GUARD - BLACK FOR SPOUTS 1/2" and 3/4"

### TECHNICAL DATA

SKU	303024
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

METERS



**303025**

## FUEL NOZZLE SPLASH GUARD - GREY FOR SPOUTS 1/2" and 3/4"

### TECHNICAL DATA

SKU	303025
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

MANUAL PUMPS

ACCESSORIES

## FUEL NOZZLE SPLASH GUARD - GREEN FOR SPOUTS 1"

### TECHNICAL DATA

SKU	303026
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**303026**

## FUEL NOZZLE SPLASH GUARD - RED FOR SPOUTS 1"

### TECHNICAL DATA

SKU	303027
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**303027**

## FUEL NOZZLE SPLASH GUARD - BLACK FOR SPOUTS 1"

### TECHNICAL DATA

SKU	303028
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**303028**

## FUEL NOZZLE INSULATOR - RED FOR NOZZLES 1"

### TECHNICAL DATA

SKU	303007
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**303007**

## FUEL NOZZLE INSULATOR - BLACK FOR NOZZLES 1"

### TECHNICAL DATA

SKU	303008
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**303008**

## FUEL NOZZLE INSULATOR - GREEN FOR NOZZLES 1"

### TECHNICAL DATA

SKU	303009
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**303009**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES



PUMPS



**303001**

## FUEL NOZZLE INSULATOR - GREEN FOR NOZZLES 1/2" and 3/4"

### TECHNICAL DATA

SKU	303001
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

KITS



**303002**

## FUEL NOZZLE INSULATOR - RED FOR NOZZLES 1/2" and 3/4"

### TECHNICAL DATA

SKU	303002
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

HOSE REELS



**303003**

## FUEL NOZZLE INSULATOR - BLUE FOR NOZZLES 1/2" and 3/4"

### TECHNICAL DATA

SKU	303003
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

HOSES



**303004**

## FUEL NOZZLE INSULATOR - YELLOW FOR NOZZLES 1/2" and 3/4"

### TECHNICAL DATA

SKU	303004
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

NOZZLES



**303005**

## FUEL NOZZLE INSULATOR - BLACK FOR NOZZLES 1/2" and 3/4"

### TECHNICAL DATA

SKU	303005
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

METERS



**350239**

## FUEL NOZZLE INSULATOR - GREY FOR NOZZLES 1/2" and 3/4"

### TECHNICAL DATA

SKU	350239
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1/2" (13/16") and 3/4" (15/16")

MANUAL PUMPS

ACCESSORIES

## FUEL NOZZLE INSULATOR - GREEN FOR 3/4" NO PRESSURE NO FLOW NOZZLE

### TECHNICAL DATA

SKU	350248
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	3/4" (15/16")



**350248**

## FUEL NOZZLE INSULATOR - RED FOR 3/4" NO PRESSURE NO FLOW NOZZLE

### TECHNICAL DATA

SKU	350249
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	3/4" (15/16")



**350249**

## FUEL NOZZLE INSULATOR - BLACK FOR 3/4" NO PRESSURE NO FLOW NOZZLE

### TECHNICAL DATA

SKU	350250
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	3/4" (15/16")



**350250**

## FUEL NOZZLE INSULATOR - GREEN FOR 1" NO PRESSURE NO FLOW NOZZLE

### TECHNICAL DATA

SKU	350257
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**350257**

## FUEL NOZZLE INSULATOR - RED FOR 1" NO PRESSURE NO FLOW NOZZLE

### TECHNICAL DATA

SKU	350258
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**350258**

## FUEL NOZZLE INSULATOR - BLACK FOR 1" NO PRESSURE NO FLOW NOZZLE

### TECHNICAL DATA

SKU	350259
MATERIAL	Rubber
FOR NOZZLES WITH SPOUT Ø	1" (1.1/16")



**350259**

PUMPS

KITS

HOSE REELS

HOSES


NOZZLES

METERS


MANUAL  
PUMPS

ACCESSORIES

PUMPS

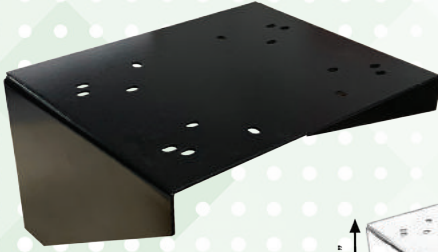

**260003**




## WALL BRACKET FOR DIAPHRAGM PUMP


### TECHNICAL DATA

SKU	260003
MATERIAL	Steel
DIMENSIONS	10.5" x 13.0" x 7.0"
WEIGHT	9 lbs

KITS



**350070**



## WALL BRACKET FOR FUEL KITS

### TECHNICAL DATA

SKU	350070
MATERIAL	Steel
DIMENSIONS	14" x 14"
WEIGHT	7 lbs

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**310090**

## REUSABLE FUEL HOSE FITTING - 3/4"

### TECHNICAL DATA

SKU	310090
MATERIAL	Chromed Brass
THREAD	3/4" NPT(m)
FOR HOSES Ø	3/4"



**310091**

## REUSABLE FUEL HOSE FITTING - 1"

### TECHNICAL DATA

SKU	310091
MATERIAL	Chromed Brass
THREAD	1" NPT(m)
FOR HOSES Ø	1"



**350001**

## FUEL HOSE REEL SWIVEL

### TECHNICAL DATA

SKU	350001
MATERIAL	Galvanized Steel
INLET	1" NPT(m)
OUTLET	1" NPT(f)

# DEF - Diesel Exhaust Fluid



## DEF PUMPS

- PAGE 248 - 110V AND 220V DEF PUMPS
- PAGE 249 - 12V DEF PUMP
- PAGE 250 - PORTABLE DEF PUMPS
- PAGE 252 - DIAPHRAGM PUMPS



## DEF KITS

- PAGE 259 - 220V DEF TOTE KITS
- PAGE 263 - 110V DEF TOTE KITS
- PAGE 267 - 12V DEF TOTE KITS
- PAGE 271 - 220V DEF DRUM KITS
- PAGE 272 - 110V DEF DRUM KITS
- PAGE 273 - 12V DEF DRUM KITS



## HOSE REELS AND HOSES

- PAGE 274 - HOSE REELS
- PAGE 275 - HOSES AND CONNECTION HOSES



## NOZZLES

- PAGE 276 - AUTOMATIC DEF NOZZLES
- PAGE 277 - MANUAL DEF NOZZLES



## METERS

- PAGE 278 - 3in1 PUMP CONTROLER
- PAGE 279 - DIGITAL METER AND REFRACTOMETER



## MANUAL PUMPS

- PAGE 280 - MANUAL PUMPS



## ACCESSORIES

- PAGE 283 - TROLLEY AND BRACKETS
- PAGE 284 - TANKS
- PAGE 286 - DOWN TUBES
- PAGE 287 - VALVES AND COUPLERS
- PAGE 288 - PORTABLE PUMP ACCESSORIES
- PAGE 289 - DEF FITTINGS AND CONNECTORS



# DEF PUMPS

- Robust and high quality air operated, electrical and portable pumps.
- Pumps with flow rates from 9 GPM to 187 GPM.
- Inlet / Outlets up to 2".
- High flow rate dispensing with low air consumption.
- High operating pressure.



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**505020**



## DEF PUMP - 220V - 9 GPM

### TECHNICAL DATA

SKU	505020
VOLTAGE	220V
MATERIAL	Acetal
FLOW RATE	Up to 9 GPM
INLET	3/4" Barb Fitting or 1" Barb Fitting
OUTLET	3/4" Barb Fitting or 1" Barb Fitting
MAX. WORKING PRESSURE	25 PSI
DUTY CYCLE (ON / OFF)	30 Min / 30 Min
POWER WATT	330W
MAX. AMP	1.5A
RPM	2900
WEIGHT	13 lbs



**505000**



## DEF PUMP - 110V - 9 GPM

### TECHNICAL DATA

SKU	505000
VOLTAGE	110V
MATERIAL	Acetal
FLOW RATE	Up to 9 GPM
INLET	3/4" Barb Fitting or 1" Barb Fitting
OUTLET	3/4" Barb Fitting or 1" Barb Fitting
MAX. WORKING PRESSURE	25 PSI
DUTY CYCLE (ON / OFF)	30 Min / 30 Min
POWER WATT	330W
MAX. AMP	3A
RPM	3400
WEIGHT	13 lbs

## DEF PUMP - 12V - 9 GPM

### TECHNICAL DATA

SKU	505001
VOLTAGE	12V
MATERIAL	Acetal
FLOW RATE	Up to 9 GPM
INLET	3/4" Barb Fitting or 1" Barb Fitting
OUTLET	3/4" Barb Fitting or 1" Barb Fitting
MAX. WORKING PRESSURE	25 PSI
DUTY CYCLE (ON / OFF)	30 Min / 30 Min
POWER WATT	200W
MAX. AMP	10A
RPM	2600
WEIGHT	11 lbs



**505001**

## DEF PUMP 2.0 - 110V - 13 GPM

### TECHNICAL DATA

SKU	552110
VOLTAGE	110V
MATERIAL	Acetal
FLOW RATE	Up to 13 GPM
INLET	3/4" Barb Fitting
OUTLET	3/4" Barb Fitting
MAX. WORKING PRESSURE	30 PSI
DUTY CYCLE (ON / OFF)	30 Min / 30 Min
POWER WATT	400W
MAX. AMP	2A
RPM	1400
WEIGHT	13 lbs



**552110**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

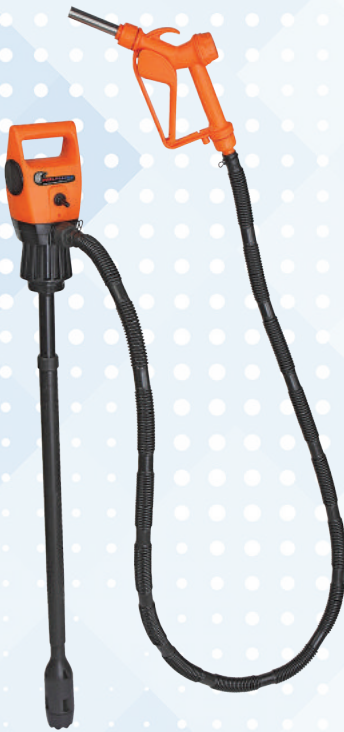

**560011**



## PORTABLE DEF PUMP MULTI-VOLTAGE - 7.4 GPM

### TECHNICAL DATA

SKU	560011
VOLTAGE	Without Power Cable
FREE FLOW RATE	Up to 7.4 GPM
OUTLET THREAD	3/4" BSP(m)
HOSE	6 ft Flexible Corrugated Hose
NOZZLE	Manual Nozzle
MAX. WORKING TEMPERATURE	41° F to 104° F
DUTY CYCLE (ON / OFF)	15 Min / 15 Min
FOR DRUMS (DRUM SIZE)	55 Gal Drum and Totes
DOWN TUBE	Telescopic Down Tube
MAX. VISCOSITY	Up to 100 cst
WEIGHT	13 lbs



**560021**



## PORTABLE DEF PUMP 19.2V BATTERY - 7.4 GPM

### TECHNICAL DATA

SKU	560021
VOLTAGE	19.2 V Li-Ion Battery
FREE FLOW RATE	Up to 7.4 GPM
OUTLET THREAD	3/4" BSP(m)
HOSE	6 ft Flexible Corrugated Hose
NOZZLE	Manual Nozzle
MAX. WORKING TEMPERATURE	41° F to 104° F
DUTY CYCLE (ON / OFF)	15 Min / 15 Min
FOR DRUMS (DRUM SIZE)	55 Gal Drum and Totes
DOWN TUBE	Telescopic Down Tube
MAX. VISCOSITY	Up to 100 cst
WEIGHT	14 lbs

## PORTABLE DEF PUMP 12V BATTERY - 5 GPM

### TECHNICAL DATA

SKU	557012
VOLTAGE	12 V Power Cable
FREE FLOW RATE	Up to 5 GPM
OUTLET THREAD	3/4" BSP(m)
HOSE	6 ft Flexible Corrugated Hose
NOZZLE	Manual Nozzle
MAX. WORKING TEMPERATURE	41° F to 104° F
DUTY CYCLE (ON / OFF)	15 Min / 15 Min
FOR DRUMS (DRUM SIZE)	55 Gal Drum and Totes
DOWN TUBE	Telescopic Down Tube
MAX. VISCOSITY	Up to 100 cst
WEIGHT	13 lbs



**557012**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

## PORTABLE DEF PUMP 110V BATTERY - 5 GPM

### TECHNICAL DATA


SKU	557120
VOLTAGE	110 V Power Cable
FREE FLOW RATE	Up to 5 GPM
OUTLET THREAD	3/4" BSP(m)
HOSE	6 ft Flexible Corrugated Hose
NOZZLE	Manual Nozzle
MAX. WORKING TEMPERATURE	41° F to 104° F
DUTY CYCLE (ON / OFF)	15 Min / 15 Min
FOR DRUMS (DRUM SIZE)	55 Gal Drum and Totes
DOWN TUBE	Telescopic Down Tube
MAX. VISCOSITY	Up to 100 cst
WEIGHT	13 lbs



**557120**




## DIAPHRAGM PUMP POLYPROPYLENE - 3/8" FREE FLOW RATE 5 GPM

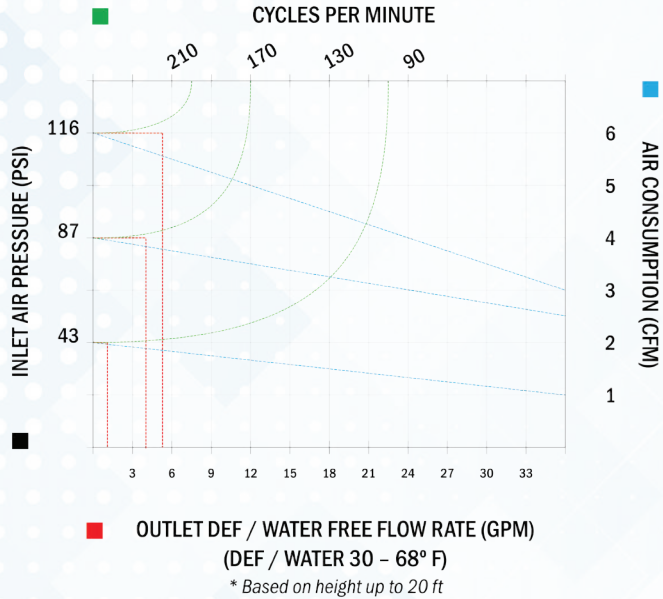

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 540380



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Heavy-duty dealerships
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers

### TECHNICAL DATA

SKU	540380	MAX. VISCOSITY	12.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	3/8" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	3/8" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	6 mm (15/64")	MAX. SUCTION LIFT - DRY	16 ft
FREE FLOW RATE (116 PSI)	5 GPM	MAX. SUCTION LIFT - WET	30 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	PTFE
AIR CONSUMPTION (116 PSI)	3 CFM	DIAPHRAGM MATERIAL	Hytel + PTFE
NOISE	65 dB	WEIGHT	3 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1/2" FREE FLOW RATE 14.5 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

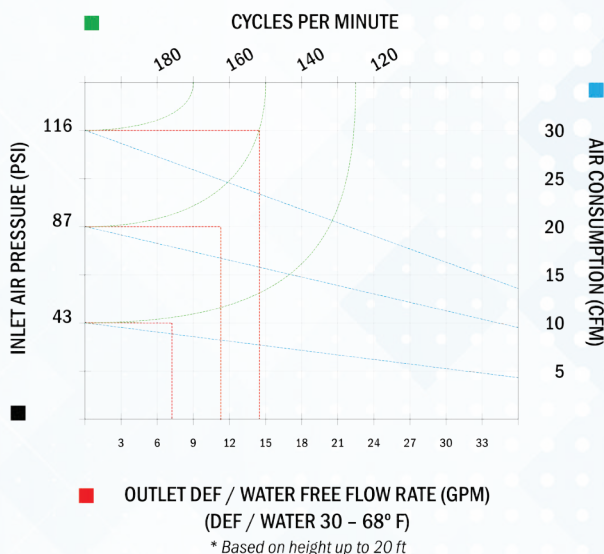


EX II 3/3 GD c IIB T 275F<sup>0</sup> ATEX zone 2

### 540120

#### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- DEF transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

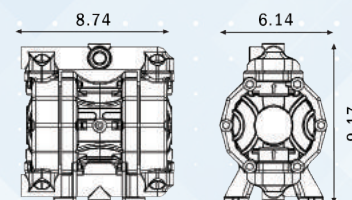

#### TECHNICAL DATA


SKU	540120	MAX. VISCOSITY	20.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	1/2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	14.5 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	14 CFM	DIAPHRAGM MATERIAL	Hytelr + PTFE
NOISE	68 dB	WEIGHT	10 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP POLYPROPYLENE - 3/4" FREE FLOW RATE 29 GPM

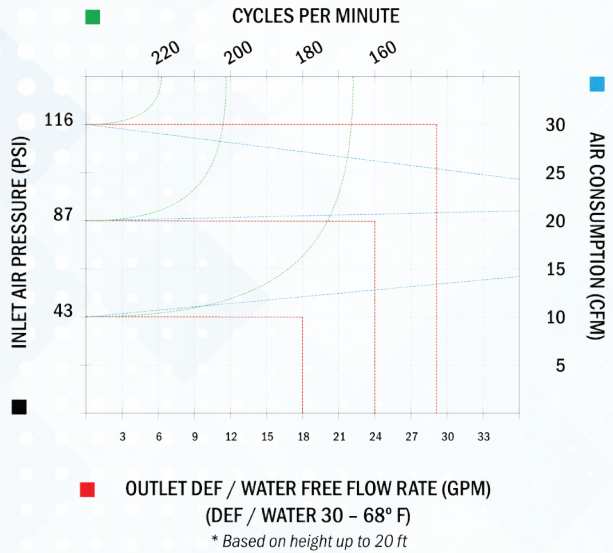

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 540340



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- DEF transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	540340	<b>MAX. VISCOSITY</b>	25.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	1/8"
<b>FLUID INLET</b>	3/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	3/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/8" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	29 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	24 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	72 dB	<b>WEIGHT</b>	16 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1" FREE FLOW RATE 45 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS



MANUAL PUMPS

ACCESSORIES

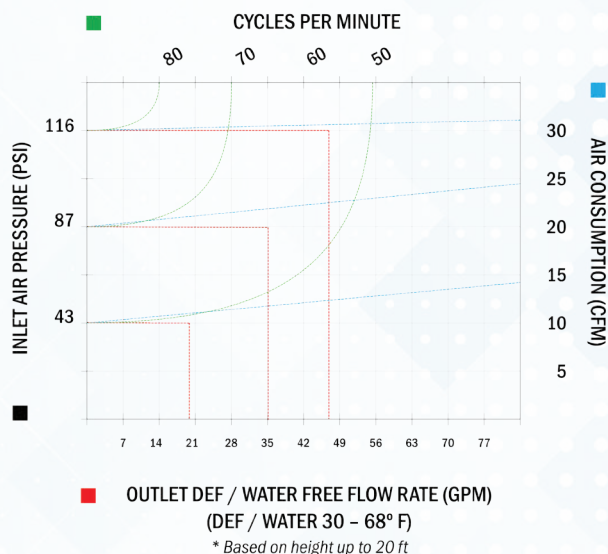

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 541000



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- DEF transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA


<b>SKU</b>	541000	<b>MAX. VISCOSITY</b>	35.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/2" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	45 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	31 CFM	<b>DIAPHRAGM MATERIAL</b>	Hyrel + PTFE
<b>NOISE</b>	75 dB	<b>WEIGHT</b>	36 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.




## DIAPHRAGM PUMP POLYPROPYLENE - 1.1/4” FREE FLOW RATE 66 GPM

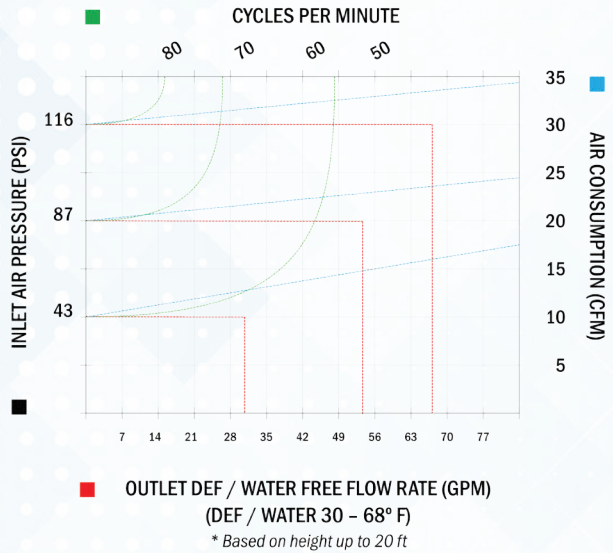

EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 541140



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- DEF transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	541140	<b>MAX. VISCOSITY</b>	35.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/4" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/4" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	1/2" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	66 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	35 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrel + PTFE
<b>NOISE</b>	75 dB	<b>WEIGHT</b>	36 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

## DIAPHRAGM PUMP POLYPROPYLENE - 1.1/2" FREE FLOW RATE 105 GPM



PUMPS

KITS

HOSE REELS


HOSES

NOZZLES

METERS



MANUAL PUMPS

ACCESSORIES

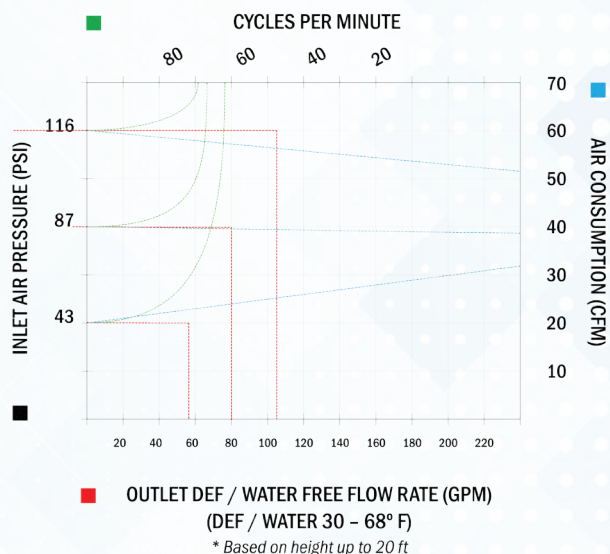

EX II 3/3 GD c IIB T 275F<sup>o</sup> ATEX zone 2

### 541120



### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- DEF transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

<b>SKU</b>	541120	<b>MAX. VISCOSITY</b>	50.000 CPS
<b>PUMP RATIO</b>	1:1	<b>MAX. SOLID PASSING</b>	5/16"
<b>FLUID INLET</b>	1.1/2" NPT(f)	<b>MAX. TEMP. WORKING</b>	149° F
<b>FLUID OUTLET</b>	1.1/2" NPT(f)	<b>MAX. DELIVERY. HEIGHT</b>	262.5 ft
<b>AIR INLET</b>	3/4" NPT(f)	<b>MAX. SUCTION LIFT - DRY</b>	19.7 ft
<b>FREE FLOW RATE (116 PSI)</b>	105 GPM	<b>MAX. SUCTION LIFT - WET</b>	32.15 ft
<b>AIR WORKING PRESSURE (RANGE)</b>	29 PSI to 116 PSI	<b>BALL MATERIAL</b>	SS AISI 316
<b>AIR CONSUMPTION (116 PSI)</b>	52 CFM	<b>DIAPHRAGM MATERIAL</b>	Hytrek + PTFE
<b>NOISE</b>	78 dB	<b>WEIGHT</b>	49 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.







## DIAPHRAGM PUMP POLYPROPYLENE - 2" FREE FLOW RATE 185 GPM



EX II 3/3 GD c IIB T 275F° ATEX zone 2

### 542000

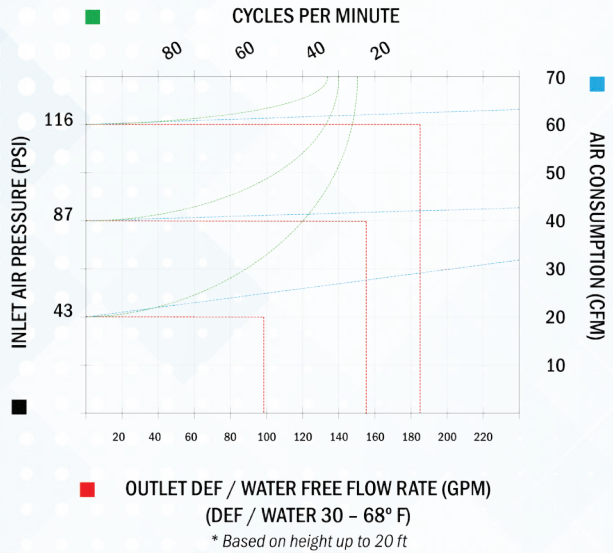

### Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- DEF transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

### TECHNICAL DATA

SKU	542000	MAX. VISCOSITY	50.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	3/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	185 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	65 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	78 dB	WEIGHT	80 lbs

These pumps are recommended for the use of transferring DEF and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

The operating pressure may vary between a minimum of 29 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered air to optimize the efficiency and the life of our air operated pumps.

VOLTAGE  
**220V**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

## 220V DEF KITS SUMMARY

SKU	VOLTAGE	HOSE	NOZZLE	METER	SS VALVE
505097	220V	20' (16' + 4')	Built-in Meter Nozzle	-	Yes
505093	220V	20' (16' + 4')	Built-in Meter Nozzle	-	-
505223	220V	20' (16' + 4')	Auto. SS Nozzle	Yes	Yes
505222	220V	20' (16' + 4')	Auto. SS Nozzle	Yes	-
505221	220V	20' (16' + 4')	Auto. SS Nozzle	-	-
505098	220V	20' (16' + 4')	Auto. SS/Plastic Nozzle	Yes	Yes
505094	220V	20' (16' + 4')	Auto. SS/Plastic Nozzle	Yes	-
505090	220V	20' (16' + 4')	Auto. SS/Plastic Nozzle	-	-
505095	220V	20' (16' + 4')	Manual Nozzle	Yes	Yes
505091	220V	20' (16' + 4')	Manual Nozzle	Yes	-
505220	220V	20' (16' + 4')	Manual Nozzle	-	-

### DEF KIT FOR TOTES - 220V BUILT-IN METER NOZZLE, HOSE AND SUCTION VALVE



**505097**

#### TECHNICAL DATA

SKU	505097
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
SUCTION VALVE	501501 - Stainless Steel Suction Valve

### DEF KIT FOR TOTES - 220V BUILT-IN METER NOZZLE AND HOSE



**505093**

#### TECHNICAL DATA

SKU	505093
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



VOLTAGE  
220V



**505223**

## DEF KIT FOR TOTES - 220V AUTO. NOZZLE, HOSE, METER, SUCTION VALVE

### TECHNICAL DATA

SKU	505223
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve



VOLTAGE  
220V



**505222**

## DEF KIT FOR TOTES - 220V AUTO. NOZZLE, HOSE, METER

### TECHNICAL DATA

SKU	505222
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)



VOLTAGE  
220V



**505221**

## DEF KIT FOR TOTES - 220V AUTO. NOZZLE, HOSE

### TECHNICAL DATA

SKU	505221
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

## DEF KIT FOR TOTES - 220V AUTO. SS/PLASTIC NOZZLE, HOSE, METER AND SUCTION VALVE



VOLTAGE  
220V



**505098**

### TECHNICAL DATA

SKU	505098
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve

## DEF KIT FOR TOTES - 220V AUTO. SS/PLASTIC NOZZLE, HOSE AND METER



VOLTAGE  
220V



**505094**

### TECHNICAL DATA

SKU	505094
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)

## DEF KIT FOR TOTES - 220V AUTO. SS/PLASTIC NOZZLE AND HOSE



VOLTAGE  
220V



**505090**

### TECHNICAL DATA

SKU	505090
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**505095**

## DEF KIT FOR TOTES - 220V MANUAL NOZZLE, HOSE, METER, SUCTION VALVE

### TECHNICAL DATA

SKU	505095
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve



**505091**

## DEF KIT FOR TOTES - 220V MANUAL NOZZLE, HOSE, METER

### TECHNICAL DATA

SKU	505091
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)



**505220**

## DEF KIT FOR TOTES - 220V MANUAL NOZZLE, HOSE

### TECHNICAL DATA

SKU	505220
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

VOLTAGE  
110V

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

## 110V DEF KITS SUMMARY

SKU	VOLTAGE	HOSE	NOZZLE	METER	SS VALVE
505215	110V	20' (16' + 4')	Built-in Meter Nozzle	-	Yes
505083	110V	20' (16' + 4')	Built-in Meter Nozzle	-	-
560002	110V	20' (16' + 4')	Auto. SS Nozzle	Yes	Yes
505011	110V	20' (16' + 4')	Auto. SS Nozzle	Yes	-
505009	110V	20' (16' + 4')	Auto. SS Nozzle	-	-
505087	110V	20' (16' + 4')	Auto. SS/Plastic Nozzle	Yes	Yes
505030	110V	20' (16' + 4')	Auto. SS/Plastic Nozzle	Yes	-
505081	110V	20' (16' + 4')	Auto. SS/Plastic Nozzle	-	-
505085	110V	20' (16' + 4')	Manual Nozzle	Yes	Yes
505082	110V	20' (16' + 4')	Manual Nozzle	Yes	-
505010	110V	20' (16' + 4')	Manual Nozzle	-	-

### DEF KIT FOR TOTES - 110V BUILT-IN METER NOZZLE, HOSE AND SUCTION VALVE

#### TECHNICAL DATA

SKU	505215
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
SUCTION VALVE	501501 - Stainless Steel Suction Valve



VOLTAGE  
110V



505215

### DEF KIT FOR TOTES - 110V BUILT-IN METER NOZZLE AND HOSE

#### TECHNICAL DATA

SKU	505083
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)



VOLTAGE  
110V



505083

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



VOLTAGE  
110V



**560002**

## DEF KIT FOR TOTES - 110V AUTO. NOZZLE, HOSE, METER, SUCTION VALVE

### TECHNICAL DATA

SKU	560002
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve



VOLTAGE  
110V



**505011**

## DEF KIT FOR TOTES - 110V AUTO. NOZZLE, HOSE, METER

### TECHNICAL DATA

SKU	505011
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)



VOLTAGE  
110V



**505009**

## DEF KIT FOR TOTES - 110V AUTO. NOZZLE, HOSE

### TECHNICAL DATA

SKU	505009
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

## DEF KIT FOR TOTES - 110V AUTO. SS/PLASTIC NOZZLE, HOSE, METER AND SUCTION VALVE



VOLTAGE  
110V



### TECHNICAL DATA

SKU	505087
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve

505087

## DEF KIT FOR TOTES - 110V AUTO. SS/PLASTIC NOZZLE, HOSE AND METER



VOLTAGE  
110V



### TECHNICAL DATA

SKU	505030
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)

505030

## DEF KIT FOR TOTES - 110V AUTO. SS/PLASTIC NOZZLE AND HOSE



VOLTAGE  
110V



### TECHNICAL DATA

SKU	505081
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

505081

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**505085**

## DEF KIT FOR TOTES - 110V MANUAL NOZZLE, HOSE, METER, SUCTION VALVE

### TECHNICAL DATA

SKU	505085
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve



**505082**

## DEF KIT FOR TOTES - 110V MANUAL NOZZLE, HOSE, METER

### TECHNICAL DATA

SKU	505082
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)



**505010**

## DEF KIT FOR TOTES - 110V MANUAL NOZZLE, HOSE

### TECHNICAL DATA

SKU	505010
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

VOLTAGE  
12V

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

## 12V DEF KITS SUMMARY

SKU	VOLTAGE	HOSE	NOZZLE	METER	SS VALVE
505079	12V	20' (16' + 4')	Built-in Meter Nozzle	-	Yes
505076	12V	20' (16' + 4')	Built-in Meter Nozzle	-	-
560003	12V	20' (16' + 4')	Auto. SS Nozzle	Yes	Yes
505013	12V	20' (16' + 4')	Auto. SS Nozzle	Yes	-
560020	12V	20' (16' + 4')	Auto. SS Nozzle	-	-
505080	12V	20' (16' + 4')	Auto. SS/Plastic Nozzle	Yes	Yes
505077	12V	20' (16' + 4')	Auto. SS/Plastic Nozzle	Yes	-
505074	12V	20' (16' + 4')	Auto. SS/Plastic Nozzle	-	-
505078	12V	20' (16' + 4')	Manual Nozzle	Yes	Yes
505075	12V	20' (16' + 4')	Manual Nozzle	Yes	-
505012	12V	20' (16' + 4')	Manual Nozzle	-	-

### DEF KIT FOR TOTES - 12V BUILT-IN METER NOZZLE, HOSE AND SUCTION VALVE



VOLTAGE  
12V



#### TECHNICAL DATA

SKU	505079
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
SUCTION VALVE	501501 - Stainless Steel Suction Valve

505079

### DEF KIT FOR TOTES - 12V BUILT-IN METER NOZZLE AND HOSE



VOLTAGE  
12V



#### TECHNICAL DATA

SKU	505076
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

505076

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



VOLTAGE  
12V



**560003**

## DEF KIT FOR TOTES - 12V AUTO. NOZZLE, HOSE, METER, SUCTION VALVE

### TECHNICAL DATA

SKU	560003
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve



VOLTAGE  
12V



**505013**

## DEF KIT FOR TOTES - 12V AUTO. NOZZLE, HOSE, METER

### TECHNICAL DATA

SKU	505013
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)



VOLTAGE  
12V



**560020**

## DEF KIT FOR TOTES - 12V AUTO. NOZZLE, HOSE

### TECHNICAL DATA

SKU	560020
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

## DEF KIT FOR TOTES - 12V AUTO. SS/PLASTIC NOZZLE, HOSE, METER AND SUCTION VALVE

DEF **D**  
WATER **W**  
ANTIFREEZE **AN**

VOLTAGE  
12V



**505080**

### TECHNICAL DATA

SKU	505080
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve

## DEF KIT FOR TOTES - 12V AUTO. SS/PLASTIC NOZZLE, HOSE AND METER

DEF **D**  
WATER **W**  
ANTIFREEZE **AN**

VOLTAGE  
12V



**505077**

### TECHNICAL DATA

SKU	505077
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)

## DEF KIT FOR TOTES - 12V AUTO. SS/PLASTIC NOZZLE AND HOSE

DEF **D**  
WATER **W**  
ANTIFREEZE **AN**

VOLTAGE  
12V



**505074**

### TECHNICAL DATA

SKU	505074
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



VOLTAGE  
12V



**505078**

## DEF KIT FOR TOTES - 12V MANUAL NOZZLE, HOSE, METER, SUCTION VALVE

### TECHNICAL DATA

SKU	505078
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	501501 - Stainless Steel Suction Valve



VOLTAGE  
12V



**505075**

## DEF KIT FOR TOTES - 12V MANUAL NOZZLE, HOSE, METER

### TECHNICAL DATA

SKU	505075
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	505002 - Digital Meter
SUCTION VALVE	(Without Suction Valve)



VOLTAGE  
12V



**505012**

## DEF KIT FOR TOTES - 12V MANUAL NOZZLE, HOSE

### TECHNICAL DATA

SKU	505012
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560014 - Tote Bracket
HOSE	520200 - 16ft Dispensing Hose + 4ft Suc. Hose
NOZZLE	505004 - Manual Plastic Nozzle
METER	(Without Meter)
SUCTION VALVE	(Without Suction Valve)

VOLTAGE  
**220V**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES

## 220V DEF DRUM KITS SUMMARY

SKU	VOLTAGE	HOSE	NOZZLE	METER	SS VALVE
500631	220V	20' (16' + 2')	Built-in Meter Nozzle	-	-
500632	220V	20' (16' + 2')	Auto. SS/Plastic Nozzle	Yes	-
500633	220V	20' (16' + 2')	Auto. SS Nozzle	Yes	-

### DEF DRUM KIT - 220V WITH TROLLEY, BUILT-IN METER NOZZLE AND HOSE



**500631**

#### TECHNICAL DATA

SKU	500631
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560007 - Drum Bracket - For 55 Gal Drum
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
TROLLEY	560019 - Three Wheels Trolley

### DEF DRUM KIT - 220V WITH TROLLEY, AUTO. SS/PLASTIC NOZZLE, HOSE AND METER



**500632**

#### TECHNICAL DATA

SKU	500632
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560007 - Drum Bracket - For 55 Gal Drum
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
TROLLEY	560019 - Three Wheels Trolley

### DEF DRUM KIT - 220V WITH TROLLEY, AUTO. NOZZLE, HOSE AND METER



**500633**

#### TECHNICAL DATA

SKU	500633
PUMP	505020 - DEF Pump 220V - 9 GPM
BRACKET	560007 - Drum Bracket - For 55 Gal Drum
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
TROLLEY	560019 - Three Wheels Trolley

VOLTAGE  
**110V**

## 110V DEF DRUM KITS SUMMARY

SKU	VOLTAGE	HOSE	NOZZLE	METER	SS VALVE
500621	110V	20' (16' + 2')	Built-in Meter Nozzle	-	-
500622	110V	20' (16' + 2')	Auto. SS/Plastic Nozzle	Yes	-
500623	110V	20' (16' + 2')	Auto. SS Nozzle	Yes	-

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



VOLTAGE  
**110V**



**500621**

### DEF DRUM KIT - 110V WITH TROLLEY, BUILT-IN METER NOZZLE AND HOSE

#### TECHNICAL DATA

SKU	500621
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560007 - Tote Bracket
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
TROLLEY	560019 - Three Wheels Trolley



VOLTAGE  
**110V**



**500622**

### DEF DRUM KIT - 110V WITH TROLLEY, AUTO. SS/PLASTIC NOZZLE, HOSE AND METER

#### TECHNICAL DATA

SKU	500622
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560007 - Tote Bracket
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
TROLLEY	560019 - Three Wheels Trolley



VOLTAGE  
**110V**



**500623**

### DEF DRUM KIT - 110V WITH TROLLEY, AUTO. NOZZLE, HOSE AND METER

#### TECHNICAL DATA

SKU	500623
PUMP	505000 - DEF Pump 110V - 9 GPM
BRACKET	560007 - Tote Bracket
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
TROLLEY	560019 - Three Wheels Trolley

VOLTAGE  
**12V**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

## 12V DEF DRUM KITS SUMMARY

SKU	VOLTAGE	HOSE	NOZZLE	METER	SS VALVE
500611	12V	20' (16' + 2')	Built-in Meter Nozzle	-	-
500612	12V	20' (16' + 2')	Auto. SS/Plastic Nozzle	Yes	-
500613	12V	20' (16' + 2')	Auto. SS Nozzle	Yes	-

### DEF DRUM KIT - 12V WITH TROLLEY, BUILT-IN METER NOZZLE AND HOSE

DEF D  
WATER W  
ANTIFREEZE AN

VOLTAGE  
**12V**



**500611**

#### TECHNICAL DATA

SKU	500611
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560007 - Tote Bracket
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	500801 - Automatic Built-in Meter Nozzle
METER	(Without Meter)
TROLLEY	560019 - Three Wheels Trolley

### DEF DRUM KIT - 12V WITH TROLLEY, AUTO. SS/PLASTIC NOZZLE, HOSE AND METER

DEF D  
WATER W  
ANTIFREEZE AN

VOLTAGE  
**12V**



**500612**

#### TECHNICAL DATA

SKU	500612
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560007 - Tote Bracket
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	505050 - Automatic SS/Plastic Nozzle
METER	505002 - Digital Meter
TROLLEY	560019 - Three Wheels Trolley

### DEF DRUM KIT - 12V WITH TROLLEY, AUTO. NOZZLE, HOSE AND METER

DEF D  
WATER W  
ANTIFREEZE AN

VOLTAGE  
**12V**



**500613**

#### TECHNICAL DATA

SKU	500613
PUMP	505001 - DEF Pump 12V - 9 GPM
BRACKET	560007 - Tote Bracket
DISPENSING HOSE	520160 - 16ft 3/4" EPDM Hose
SUCTION HOSE	520020 - 2ft 3/4" EPDM Hose
NOZZLE	505014 - Automatic SS Nozzle
METER	505002 - Digital Meter
TROLLEY	560019 - Three Wheels Trolley



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



DEF  
**D**

WATER  
**W**

ANTIFREEZE  
**AN**

## SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.

## SELECTING HOSE REELS


The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.

## SIZES AND CAPACITY

MODEL F550

Up to 50ft 3/4"

## HOSE REEL INSTALLATIONS

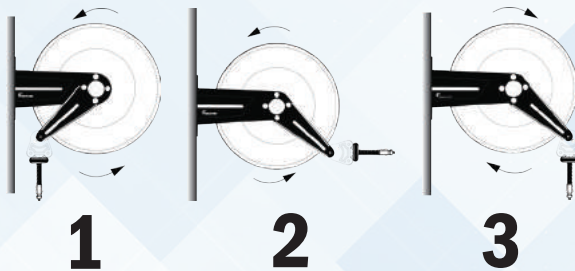


1

2

3

### WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 1 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.

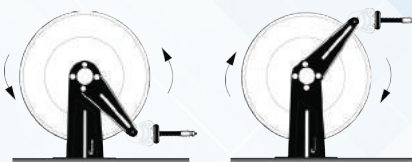

### BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.




### CEILING

Ceiling installations are the same as the wall mounted 2 set up.

## FEATURES:

- DOUBLE ARMS
- STAINLESS STEEL 90° JOINT
- STAINLESS STEEL CONNECTIONS
- POWDER COATED PAINT
- VITON SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **290 PSI**

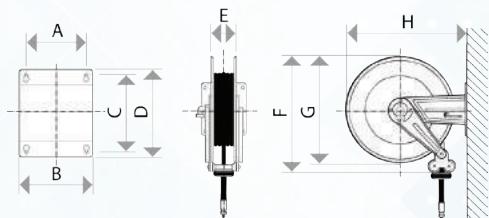

PUMPS

KITS

HOSE REELS

MODEL	A	B	C	D	E	F	G	H
F550	7.9"	5.9"	8.9"	10.7"	4.8"	23.3"	21.7"	23.7"

SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
550100	F550	3/4" NPT(f)	3/4" Barb Fitting	Without hose	-	49 lbs
550102	F550	3/4" NPT(f)	3/4" Barb Fitting	30 ft	3/4"	63 lbs
550103	F550	3/4" NPT(f)	3/4" Barb Fitting	50 ft	3/4"	70 lbs

HOSES

## EPDM HOSES

Approximately Weight per Foot
3/4"
+ - 5.3 oz



NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
550204	3/4"	280 PSI	840 PSI	50 ft	Without Fittings
550203	3/4"	280 PSI	840 PSI	30 ft	Without Fittings
520201	3/4"	280 PSI	840 PSI	20 ft	Without Fittings
520200	3/4"	280 PSI	840 PSI	20 ft (16 ft + 4 ft)	Without Fittings
520160	3/4"	280 PSI	840 PSI	16 ft	Without Fittings
520100	3/4"	280 PSI	840 PSI	10 ft	Without Fittings
520040	3/4"	280 PSI	840 PSI	4 ft	Without Fittings
520020	3/4"	280 PSI	840 PSI	2 ft	Without Fittings

\* Different lengths available upon request.

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

DEF  
**D**

WATER  
**W**

ANTI-FREEZE  
**AN**

DEF  
**D**

WATER  
**W**

ANTI-FREEZE  
**AN**

DEF  
**D**

WATER  
**W**

ANTI-FREEZE  
**AN**



## 500801

### AUTOMATIC DIGITAL BUILT-IN METER NOZZLE

#### TECHNICAL DATA

SKU	500801
MATERIAL	Acetal
FLOW RATE	Up to 9 GPM
ACCURACY	+/- 0.5%
INLET	3/4" Barb Fitting
SPOUT	1/2" Stainless Steel
MAX. WORKING PRESSURE	70 PSI
SEALS	Viton



## 505014

### AUTOMATIC STAINLESS STEEL NOZZLE

#### TECHNICAL DATA

SKU	505014
MATERIAL	Stainless Steel
FLOW RATE	Up to 9 GPM
INLET	3/4" Barb Fitting
SPOUT	1/2" Stainless Steel
MAX. WORKING PRESSURE	51 PSI
SEALS	Viton



## 505050

### AUTOMATIC HALF PLASTIC HALF STAINLESS STEEL NOZZLE

#### TECHNICAL DATA

SKU	505050
MATERIAL	Plastic / Stainless Steel
FLOW RATE	Up to 9 GPM
INLET	3/4" Barb Fitting
SPOUT	1/2" Stainless Steel
MAX. WORKING PRESSURE	51 PSI
SEALS	Viton

## MANUAL NOZZLE - PROFESSIONAL WITH RUBBER HANDLE

### TECHNICAL DATA

SKU	505003
MATERIAL	Acetal
FLOW RATE	Up to 20 GPM
INLET	3/4" Barb Fitting
SPOUT	1/2" Stainless Steel
MAX. WORKING PRESSURE	40 PSI
SEALS	Viton



**505003**

## MANUAL NOZZLE - STANDARD

### TECHNICAL DATA

SKU	505004
MATERIAL	Acetal
FLOW RATE	Up to 20 GPM
INLET	3/4" Barb Fitting
SPOUT	1/2" Stainless Steel
MAX. WORKING PRESSURE	30 PSI
SEALS	Viton



**505004**

## MANUAL NOZZLE GRAVITY KIT

### TECHNICAL DATA

SKU	501401
MATERIAL	Acetal
FLOW RATE	Up to 20 GPM
INLET	3/4" Barb Fitting
SPOUT	1/2" Stainless Steel
SEALS	Viton
HOSE	520100 - 10ft Dispensing Hose
IBC CONNECTOR	247034 - IBC/Tote Adapter



**501401**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



# 3in1

## PUMP CONTROLLER

### PRODUCT COMMITMENT

The exclusive Wolflube 3in1 Pump Controller was developed based on years of marketing research. Integrating many automatic control advantages present in the market. The 3 functions implemented in the pump controller will provide a much better and unique user experience.

### SOME ADVANTAGES OF USING WOLFLUBE 3in1 PUMP CONTROLLER

- Extra protection for your pump reducing the inactive/bypass time.
- Increase productivity using the maximum of your pump's duty cycle.
- Improves efficiency by controlling and keeping the quality of your DEF.
- Reduce accident and make your workplace safer and cleaner.
- Simple installation suitable for any DEF electrical pump.
- Unique 3in1 function with 3 modes (Press Mode, Timing Mode, and Flow Mode) for different applications.
- Sophisticated protection and control with important information on the display.



Pressure Mode

#### PRESSURE MODE

Pressure relief after nozzle opens: Pump starts when the actual pressure is lower than the starting pressure value.



Flow mode

#### FLOW MODE

Pressure relief valve opens: Pump starts when the actual pressure is lower than the starting pressure values but for positive pressure system only.



Timing Mode

#### TIMING MODE (TIMER)

The pump is started after the time interval preset up.

### TECHNICAL DATA

<b>SKU</b>	550055	550057
<b>VOLTAGE</b>	110V	220V
<b>FLOW RATE</b>	Up to 31 GPM	Up to 31 GPM
<b>INLET</b>	1" BSP(m)	1" BSP(m)
<b>OUTLET</b>	1" BSP(m)	1" BSP(m)
<b>MAX. WORKING PRESSURE</b>	140 PSI	140 PSI
<b>MAX. FLUID TEMPERATURE</b>	176° F	176° F
<b>MAX. AMBIENT TEMPERATURE</b>	104° F	104° F
<b>MAX. POWER</b>	1.3 KW	1.3 KW
<b>MAX. CURRENT</b>	10A	10A
<b>PROTECTION</b>	IP54	IP54

## OVAL GEAR DEF DIGITAL METER

### TECHNICAL DATA

SKU	555001
MATERIAL	Acetal
FLOW RATE	1.6 up to 26 GPM
INLET	1" BSP(f)
OUTLET	1" BSP(f)
MAX. WORKING PRESSURE	140PSI
ACCURACY	+/- 0.5%
MEASURING SYSTEM	Oval Gear



**555001**

## DEF DIGITAL METER

### TECHNICAL DATA

SKU	505002
MATERIAL	Acetal
FLOW RATE	1.6 up to 26 GPM
INLET	1" BSP(m)
OUTLET	1" BSP(m)
MAX. WORKING PRESSURE	140 PSI
ACCURACY	+/- 1%
MEASURING SYSTEM	Turbine



**505002**

## REFRACTOMETER - POCKET UREA CONCENTRATION METER

### TECHNICAL DATA

SKU	500950
DISPLAY	LCD
MINIMUM SAMPLE VOLUME	6 metric drops
ACCURACY	+/- 0.2%
READING RANGE	0% to 40%
BATTERY TYPE / LIFE	2 x AAA, up to 5,000 readings
DIMENSIONS	5.7" x 2.6" x 1.5"
WEIGHT	6.5 Oz
PROTECTION	IP65



**500950**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



SUITABLE FOR :



**500102**

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



SUITABLE FOR :



**500101**

## MANUAL DEF PUMP PISTON TYPE WITH HOSE

### Product Brief

Lever Action Barrel pump. Built-In 2" Bung Adaptor allows the pump to be fixed on drums with 2" opening.

Pump outlet is fitted with an Air Vent Cap.

With 4 ft dispensing PVC hose with Stainless Steel spout. Complete with a 3 pcs threaded suction tube for use on 15 gallons (50 liters) - 55 gallons (205 liters) barrels.

### WETTED COMPONENTS

Polyacetal, Polypropylene, Polyethylene, PVC & Viton

### RECOMMENDED USE

DEF, Water-based media, detergents, soaps, antifreeze, windshield washer, Adblue, and Urea.

The pump should only be used with Non-flammable liquids.

### DO NOT USE

With any media not compatible with materials used in the pump construction. These pumps must never be used for fuel transfer or with Thinners, Solvents, etc.

### TECHNICAL DATA

SKU	500102
FLOW RATE	Up to 16 oz per stroke

## MANUAL DEF PUMP PISTON TYPE

### Product Brief

Lever Action Barrel pump. Built-In 2" Bung Adaptor allows the pump to be fixed on drums with 2" opening.

Pump outlet is fitted with an Air Vent Cap.

Complete with a 3 pcs threaded suction tube for use on 15 gallons (50 liters) - 55 gallons (205 liters) barrels.

### WETTED COMPONENTS

Polyacetal, Polypropylene, Polyethylene, PVC & Viton

### RECOMMENDED USE

DEF, Water-based media, detergents, soaps, antifreeze, windshield washer, Adblue, and Urea.

The pump should only be used with Non-flammable liquids.

### DO NOT USE

With any media not compatible with materials used in the pump construction. These pumps must never be used for fuel transfer or with Thinners, Solvents, etc.

### TECHNICAL DATA

SKU	500101
FLOW RATE	Up to 16 oz per stroke

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



SUITABLE FOR :



**500201**

## MANUAL DEF PUMP ROTARY TYPE WITH HOSE

### Product Brief

Rotary hand pump, with 2" Bung Adaptor allows the pump to be fixed on drums with 2" opening. Pump outlet is fitted with an Air Vent Cap. With 4 ft dispensing PVC hose with Stainless Steel spout. Complete with a 3 pcs threaded suction tube for use on 15 gallons (50 liters) - 55 gallons (205 liters) barrels.

### WETTED COMPONENTS

Polyacetal, Polypropylene, Polyethylene, PVC & Viton

### RECOMMENDED USE

DEF, Water-based media, detergents, soaps, antifreeze, windshield washer, Adblue, and Urea. The pump should only be used with Non-flammable liquids.

### DO NOT USE

With any media not compatible with materials used in the pump construction. These pumps must never be used for fuel transfer or with Thinners, Solvents etc.

### TECHNICAL DATA

SKU	500201
FLOW RATE	Up to 1 GAL per 20 turns

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



SUITABLE FOR :



**505016**

## MANUAL DEF PUMP ROTARY TYPE

### Product Brief

Rotary hand pump, with 2" Bung Adaptor allows the pump to be fixed on drums with 2" opening. Pump outlet is fitted with an Air Vent Cap. Complete with a 3 pcs threaded suction tube for use on 15 gallons (50 liters) - 55 gallons (205 liters) barrels.

### WETTED COMPONENTS

Polyacetal, Polypropylene, Polyethylene, PVC & Viton

### RECOMMENDED USE

DEF, Water-based media, detergents, soaps, antifreeze, windshield washer, Adblue, and Urea. The pump should only be used with Non-flammable liquids

### DO NOT USE

With any media not compatible with materials used in the pump construction. These pumps must never be used for fuel transfer or with Thinners, Solvents, etc.

### TECHNICAL DATA

SKU	505016
FLOW RATE	Up to 1 GAL per 20 turns

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**201501**



## MANUAL OIL PUMP ROTARY - FOR 55 GAL DRUM

### Product Brief

A range of special applications pump designed for use with fluids that cannot be pumped using a regular cast-iron or steel pump. Pump body and handle are constructed using glass-filled Polypropylene. Vanes made of Ryton. Complete with 3-pc threaded suction tube for use on 16 gallons to 55 gallons drums.

#### SUITABLE FOR :



#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### WETTED COMPONENTS

Polypropylene, Ryton, Viton.

#### RECOMMENDED USE

For Lubricating oils, Acids, Chemicals, Water based media, antifreeze, detergents, Urea, Adblue, DEF, Benzene, Glycerine.

#### DO NOT USE

Acetone, Lacquer, Mineral Oils, Solvents, Turpentine.

### TECHNICAL DATA

SKU	201501
FLOW RATE	Up to 1.3 GAL per 10 strokes



**201701**



## MANUAL OIL PUMP FOR 55 GAL DRUM

### Product Brief

Self priming Vertical Lift Pump designed primarily for use with lacquer thinners, Urea, AdBlue, DEF etc. Nylon construction with stainless steel plunger rod & PTFE seals. Complete with 2" polypropylene bung adapter. Complete with suction tube with non-return valve to use on 55 gallons drum.

#### SUITABLE FOR :



#### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

#### WETTED COMPONENTS

Nylon, Polypropylene, Stainless Steel & PTFE.

#### RECOMMENDED USE

With motor Oil, lacquer thinners, Acetone, Antifreeze, Brake Kleen, Detergents, Glycerine, Water, Weed Killer, mild acids, AdBlue, Urea, DEF, petroleum based fluids.

#### DO NOT USE

With strong acids, bleach, gasoline.

### TECHNICAL DATA

SKU	201701
FLOW RATE	Up to 14 oz per stroke

## 3 WHEELS TROLLEY

### TECHNICAL DATA

SKU	560019
MATERIAL	Steel
WHEELS	3 Wheels (1 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	23.4"
WEIGHT CAPACITY	Up to 600 lbs




**560019**

## DEF KIT BRACKET FOR 55 GAL DRUMS

### TECHNICAL DATA

SKU	560007
MATERIAL	Stainless Steel
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DIMENSIONS	10" x 1" x 25.5 to 27" (Adjustable)

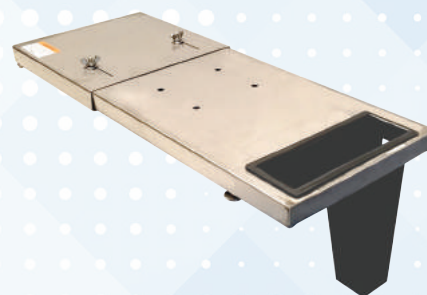

**560007**

## DEF KIT BRACKET FOR TOTE AND TROLLEY

### TECHNICAL DATA

SKU	560014
MATERIAL	Stainless Steel
FOR DRUMS (DRUM SIZE)	IBC/Totes and 55 Gal Drum
DIMENSIONS	12" x 1" x 14.5"



**560014**

## LOCKABLE CABINET FOR DEF KITS

### TECHNICAL DATA

SKU	553010
MATERIAL	Steel
LOCKABLE	Yes - with Key
DIMENSIONS	22.7" x 12.6" x 23.9"



**553010**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



## POLYPROPYLENE DEF TANK 116 GAL CAPACITY

### Product Brief

Compact and light, manufactured in roto-molded linear polyethylene, reinforced lockable cover, 2" filling plug, air vent device, integrated forklift pockets (full tank), handles for lifting and carrying (empty tank) and integrated recesses for securing with ratchet lashing strap during transport. All the fittings are made of aluminum or materials compatible with DEF fluids.

### TECHNICAL DATA

SKU	571160
CAPACITY	116 GAL
MATERIAL	Polypropylene
LEVEL GAUGE	Mechanical Level Gauge
DIMENSIONS	47" x 32" x 31"
WEIGHT	89 lbs

\* Pump, nozzle and hose sold separately.

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

**571160**



## POLYPROPYLENE DEF TANK 60 GAL CAPACITY

### Product Brief

Compact and light, manufactured in roto-molded linear polyethylene, lockable cover, 2" filling plug, air vent device, integrated forklift pockets (full tank), handles for lifting and carrying (empty tank) and integrated recesses for securing with ratchet lashing strap during transport. All the fittings are made of aluminum or materials compatible with DEF fluids.

### TECHNICAL DATA

SKU	570600
CAPACITY	60 GAL
MATERIAL	Polypropylene
LEVEL GAUGE	Mechanical Level Gauge
DIMENSIONS	36" x 24" x 25"
WEIGHT	34 lbs

\* Pump, nozzle and hose sold separately.

### Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

**570600**

## Product Features

- Double wall tank with ventilation
- Submersible pump
- Two digital flow meters
- Two Automatic nozzles with 20 ft hose
- 2" Dry coupling filling connection
- Leaking detection alarm
- Digital level gauge
- Overfill alarm

DEF  
**D**

WATER  
**W**

ANTIFREEZE  
**AN**

## POLYPROPYLENE DEF TANK 1,056 GAL CAPACITY

### TECHNICAL DATA

SKU	571200
CAPACITY	1,056 GAL
MATERIAL	Polypropylene
PUMP	Submersible Pump
FILTER	1 Micron
HOSE	(2x) 520201 - 20 ft - 3/4" EPDM Hose
NOZZLE	(2x) 505014 - Automatic SS Nozzle
METER	(2x) 505002 - Digital Meter
DIMENSIONS	93" x 48" x 154"



**571200**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**501004**

## SUCTION TUBE FOR IBC/TOTES WITH STAINLESS STEEL VALVE

### TECHNICAL DATA

SKU	501004
MATERIAL	Plastic
VALVE	501000 - Stainless Steel Valve
LENGTH	42"



**501003**

## SUCTION TUBE FOR DRUMS WITH STAINLESS STEEL VALVE

### TECHNICAL DATA

SKU	501003
MATERIAL	Plastic
VALVE	501000 - Stainless Steel Valve
LENGTH	32"



**501014**

## DEF KIT BRACKET FOR TOTE AND TROLLEY

### TECHNICAL DATA

SKU	501014
MATERIAL	Plastic
VALVE	(Without Valve)
LENGTH	42"



**501013**

## LOCKABLE CABINET FOR DEF KITS

### TECHNICAL DATA

SKU	501013
MATERIAL	Plastic
VALVE	(Without Valve)
LENGTH	32"

## 6" TOTE LID (2.5" X 5 BUTTRESS) FOR USE WITH 501501

### TECHNICAL DATA

SKU	501099
MATERIAL	HDPE Plastic
INNER THREAD	2.5" x 5 Buttress
INTERNAL THREAD	6"



**501099**

## STAINLESS STEEL SEALED VALVE

### TECHNICAL DATA

SKU	501000
MATERIAL	Stainless Steel
THREAD	2.5" x 5 Buttress
SEAL	Viton



**501000**

## STAINLESS STEEL SEALED DISPENSE COUPLER

### TECHNICAL DATA

SKU	501501
MATERIAL	Stainless Steel
OUTLET	3/4" Bard
SEAL	Viton



**501501**

## STAINLESS STEEL SEALED FILL COUPLER

### TECHNICAL DATA

SKU	501601
MATERIAL	Stainless Steel
INLET	1" NPT(m)
VAPOR RECOVERY OUTLET	1/4" NPT(f)
SEAL	Viton



**501601**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL  
PUMPS

ACCESSORIES



**560022**

## BATTERY - 19.2V LI-ION FOR PORTABLE DEF PUMP 560011

### TECHNICAL DATA

SKU	560022
VOLTAGE	19.2V
RECHARGE TIME	1 Hour
TO USE WITH	560011 - Portable DEF Pump



**560023**

## BATTERY CHARGER - 110V/60HZ FOR 560022 BATTERY

### TECHNICAL DATA

SKU	560023
VOLTAGE	110V/60Hz
RECHARGE TIME	1 Hour
TO USE WITH	560022 - 19.2V Li-ion Battery



**560024**

## ADAPTER FOR 19.2V BATTERY FOR PORTABLE DEF PUMP 560011

### TECHNICAL DATA

SKU	560024
MATERIAL	Plastic
TO USE WITH	560011 - Portable DEF Pump
TO USE WITH	560022 - 19.2V Li-ion Battery



**560013**

## 110V POWER CABLE FOR PORTABLE DEF PUMP 560011

### TECHNICAL DATA

SKU	560013
VOLTAGE	Dual Voltage - 110V / 240V
TO USE WITH	560011 - Portable DEF Pump



**560012**

## 12V POWER CABLE FOR PORTABLE DEF PUMP 560011

### TECHNICAL DATA

SKU	560012
VOLTAGE	12V
TO USE WITH	560011 - Portable DEF Pump

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES

## DEF HOSE TAIL - FEMALE INLET

### TECHNICAL DATA

SKU	505005
MATERIAL	Acetal
INLET	1" BSP(f)
OUTLET	3/4" Barb



**505005**

## DEF HOSE TAIL - MALE INLET

### TECHNICAL DATA

SKU	550301
MATERIAL	Acetal
INLET	1" BSP(m)
OUTLET	3/4" Barb



**550301**

## 90° DEF FITTING - F x F

### TECHNICAL DATA

SKU	505006
MATERIAL	Acetal
INLET	1" BSP(f)
OUTLET	1" BSP(f)



**505006**

## 90° DEF FITTING - F x M

### TECHNICAL DATA

SKU	505007
MATERIAL	Acetal
INLET	1" BSP(f)
OUTLET	1" BSP(m)



**505007**

## STAINLESS STEEL HOSE TAIL

### TECHNICAL DATA

SKU	560004
MATERIAL	Stainless Steel
INLET	3/4" NPT(m)
OUTLET	3/4" Barb



**560004**

## STAINLESS STEEL CONNECTOR

### TECHNICAL DATA

SKU	550320
MATERIAL	Stainless Steel
INLET	1" BSP(f)
OUTLET	1" BSP(f)



**550320**

PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



PUMPS

KITS

HOSE REELS

HOSES

NOZZLES

METERS

MANUAL PUMPS

ACCESSORIES



**501002**

## PLASTIC DOWNTUBE FOR DRUMS

### TECHNICAL DATA

SKU	501002
MATERIAL	Plastic
LENGTH	41"
TO USE WITH	501550 - Plastic Dispense Coupler



**501550**

## POLYPROPYLENE DISPENSE COUPLER

### TECHNICAL DATA

SKU	501550
MATERIAL	Polypropylene
OUTLET	3/4" Barb
TO USE WITH	501002 - Plastic Downtube for Drums



**505008**

## NOZZLE X METER CONNECTOR

### TECHNICAL DATA

SKU	505008
MATERIAL	Stainless Steel / Polypropylene
INLET	3/4" NPT(m)
OUTLET	1" BSP(f)



**505019**

## STAINLESS STEEL SPOUT

### TECHNICAL DATA

SKU	505019
MATERIAL	Stainless Steel
LENGTH	5"



**501701**

## TAMPER EVIDENT RSV SHIPPING CAP

### TECHNICAL DATA

SKU	501701
MATERIAL	Plastic
TO USE WITH	For use with RSV 4Cam container valves




**501801**

## CONTAINER VALVE DUST CAP RSV

### TECHNICAL DATA

SKU	501801
MATERIAL	HPDE Plastic
TO USE WITH	For use with RSV container valves

# AIR

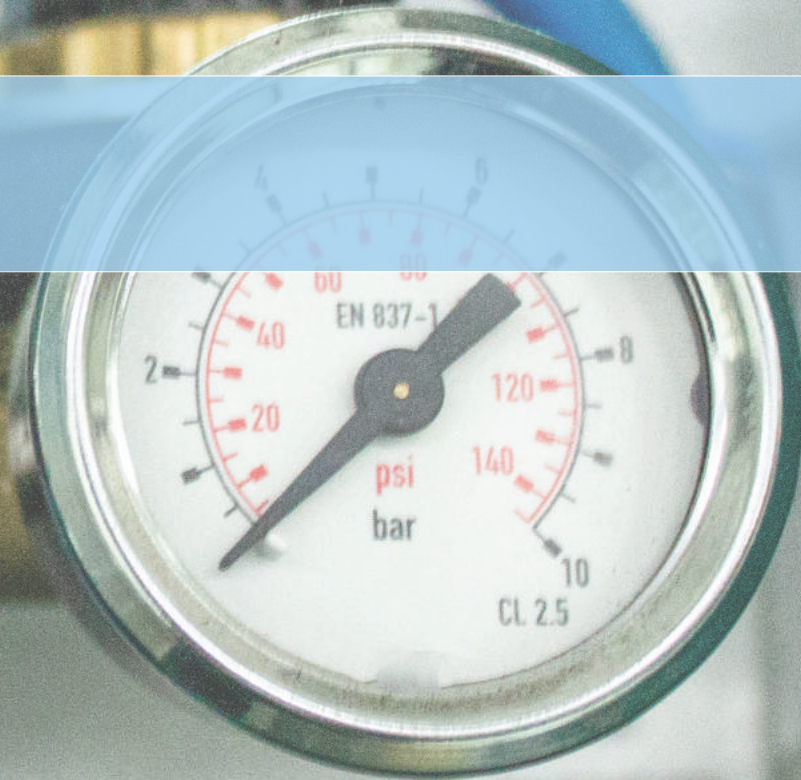

## DESICCANT BREATHER

- PAGE 294 - DESICCANT BREATHERS



## AIR REGULATOR & LUBRICATORS

- PAGE 297 - AIR REGULATOR & LUBRICATORS - 1/2"
- PAGE 300 - AIR REGULATOR & LUBRICATORS - 3/8"
- PAGE 301 - AIR REGULATOR & LUBRICATORS - 1/4"



## HOSE REELS

- PAGE 304 - AIR HOSE REELS
- PAGE 305 - AIR HOSE REELS - UP TO 60ft 3/8" or 50ft 1/2"
- PAGE 306 - AIR HOSE REELS - UP TO 100ft 3/8" or 100ft 1/2"
- PAGE 307 - ENCLOSED AIR HOSE REELS - UP TO 50ft 3/8" or 60ft 1/2"



## HOSES

- PAGE 308 - AIR HOSES - USED WITH HOSE REELS
- PAGE 309 - AIR HOSES - CONNECTION HOSES



## AIR INFLATORS

- PAGE 310 - AIR INFLATORS



## FITTINGS AND ACCESSORIES

- PAGE 311 - FITTINGS AND ACCESSORIES



# DESICCANT BREATHERS

Our desiccant breathers will help you replace the standard dust caps and/or vent caps on equipment, totes, tanks, and storage units. As they breathe the air is drawn through the breather and the moisture is removed from the air. By doing this it helps :

- Remove moisture from the air being drawn.
- Extend the lifetime of your equipment.
- Prevents water-contaminated oil.
- Provides a better quality and longer lubricant life.
- Reduces wear and tear on equipment.





**440110**

## DESICCANT BREATHER Ø 2" - SMALL

### TECHNICAL DATA

SKU	440110
INLET	BSP(f) 1/2"
MAX. FLOW RATE	5 CFM
ADSORPTION CAPACITY	1 oz
AMOUNT OF SILICA GEL	2.5 oz
FILTER	2μ
UNIT HEIGHT	2.8"
UNIT DIAMETER	2"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	0.6 lbs



**440120**

## DESICCANT BREATHER Ø 2" - MEDIUM

### TECHNICAL DATA

SKU	440120
INLET	BSP(f) 1/2"
MAX. FLOW RATE	5 CFM
ADSORPTION CAPACITY	1.4 oz
AMOUNT OF SILICA GEL	3.5 oz
FILTER	2μ
UNIT HEIGHT	3.9"
UNIT DIAMETER	2"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	0.8 lbs



**440130**

## DESICCANT BREATHER Ø 2" - BIG

### TECHNICAL DATA

SKU	440130
INLET	BSP(f) 1/2"
MAX. FLOW RATE	5 CFM
ADSORPTION CAPACITY	1.8 oz
AMOUNT OF SILICA GEL	4.6 oz
FILTER	2μ
UNIT HEIGHT	4.8"
UNIT DIAMETER	2"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	1 lbs

## DESICCANT BREATHER Ø 3.5" - SMALL

### TECHNICAL DATA

SKU	440310
INLET	BSP(f) 1/2"
MAX. FLOW RATE	5 CFM
ADSORPTION CAPACITY	3 oz
AMOUNT OF SILICA GEL	7.8 oz
FILTER	2µ
UNIT HEIGHT	3.2"
UNIT DIAMETER	3.5"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	1.2 lbs



**440310**

## DESICCANT BREATHER Ø 3.5" - MEDIUM

### TECHNICAL DATA

SKU	440320
INLET	BSP(f) 1/2"
MAX. FLOW RATE	5 CFM
ADSORPTION CAPACITY	5 oz
AMOUNT OF SILICA GEL	12.7 oz
FILTER	2µ
UNIT HEIGHT	4.7"
UNIT DIAMETER	3.5"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	1.5 lbs



**440320**

## DESICCANT BREATHER Ø 3.5" - BIG

### TECHNICAL DATA

SKU	440330
INLET	BSP(f) 1/2"
MAX. FLOW RATE	5 CFM
ADSORPTION CAPACITY	6.1 oz
AMOUNT OF SILICA GEL	15.9 oz (1 lbs)
FILTER	2µ
UNIT HEIGHT	5.8"
UNIT DIAMETER	3.5"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	1.9 lbs



**440330**

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES



**440510**

## DESICCANT BREATHER Ø 5" - SMALL

### TECHNICAL DATA

SKU	440510
INLET	BSP(f) 1"
MAX. FLOW RATE	20 CFM
ADSORPTION CAPACITY	8.5 oz
AMOUNT OF SILICA GEL	22.3 oz (1.4 lbs)
FILTER	2μ
UNIT HEIGHT	4.1"
UNIT DIAMETER	5"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	3.5 lbs



**440520**

## DESICCANT BREATHER Ø 5" - MEDIUM

### TECHNICAL DATA

SKU	440520
INLET	BSP(f) 1"
MAX. FLOW RATE	20 CFM
ADSORPTION CAPACITY	16.5 oz
AMOUNT OF SILICA GEL	43 oz (2.7 lbs)
FILTER	2μ
UNIT HEIGHT	7"
UNIT DIAMETER	5"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	4.9 lbs



**440530**

## DESICCANT BREATHER Ø 5" - BIG

### TECHNICAL DATA

SKU	440530
INLET	BSP(f) 1"
MAX. FLOW RATE	20 CFM
ADSORPTION CAPACITY	20.3 oz
AMOUNT OF SILICA GEL	52.9 oz (3.3 lbs)
FILTER	2μ
UNIT HEIGHT	8.6"
UNIT DIAMETER	5"
OPERATING TEMP. RANGE	-40° F to 176° F
WEIGHT	5.7 lbs

Space-saving 2 pc Modular Filter-Regulator Combination & Lubricator is by far the most popular Air Preparation unit. The Filter-Regular Combination & Lubricator are attached in series using spacers & piping adapters, which makes the individual components easily removable/mountable without disturbing the pipeline. These come complete with a wall mounting bracket.

**Air Filter:** is used to separate dust, dirt, moisture & other contaminants from compressed air. The filter has a Die Cast Aluminum body & bowl with a high-performance Sintered Bronze Filtering element. The filter is designed with a separator & shield for efficient moisture separation.

**Regulator:** maintains a steady outlet pressure, unaffected by variations/fluctuations in the inlet pressure. Regulators have a Non-Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet.

**Air Lubricators:** is used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/Micro Mist type, up to 50' pipe runs. Designed for best performance with 32-grade oil. These have a Die Cast Aluminum head & bowl. The head is fitted with Oil Drop Indicator, Oil drop controller, & Oil Filling Plug.

The metal bowl makes these good for use in Chemical plants, Paint shops, pharmaceutical plants, foundries, etc. where ambient air may contain chemicals, such as acetone, benzene, kerosene, gasoline, carbon tetrachloride, ethylene dichloride, toluene, etc.

Also recommended for high-pressure applications and use with air compressor systems using fire-resistant lubricants.

## AIR FILTER REGULATOR AND LUBRICATOR - 1/2"

### TECHNICAL DATA

SKU	450367
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	99 CFM
INLET	NPT(f) 1/2"
OUTLET	NPT(f) 1/2"
WORKING PRESSURE	Up to 215 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	3 oz
BOWL CAPACITY - LUBRICATOR	7 oz



**450367**

## AIR FILTER REGULATOR 1/2"

### TECHNICAL DATA

SKU	450362
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	106 CFM
INLET	NPT(f) 1/2"
OUTLET	NPT(f) 1/2"
WORKING PRESSURE	Up to 215 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	3 oz



**450362**

DESICCANT BREATHERS

AIR REGULATOR & LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES




The Filter-Regular Combination & Lubricator are attached in series using spacers & piping adapters, which makes the 2 components easily removable/mountable without disturbing the pipeline. Come complete with a wall mounting bracket.

**Air Filter:** is used to separate dust, dirt, moisture & other contaminants from compressed air. The filter has a Die Cast Aluminum body & bowl with a high-performance Sintered Bronze Filtering element. The filter is designed with a separator & shield for efficient moisture separation.

**Regulator:** maintains a steady outlet pressure, unaffected by variations/fluctuations in the inlet pressure. Regulators have a Non-Raising “Press to Lock” adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet.

**Air Lubricators:** is used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/Micro Mist type, up to 50’ pipe runs. Designed for best performance with 32-grade oil. These have a Die Cast Aluminum head & bowl. The head is fitted with Oil Drop Indicator, Oil drop controller, & Oil Filling Plug.

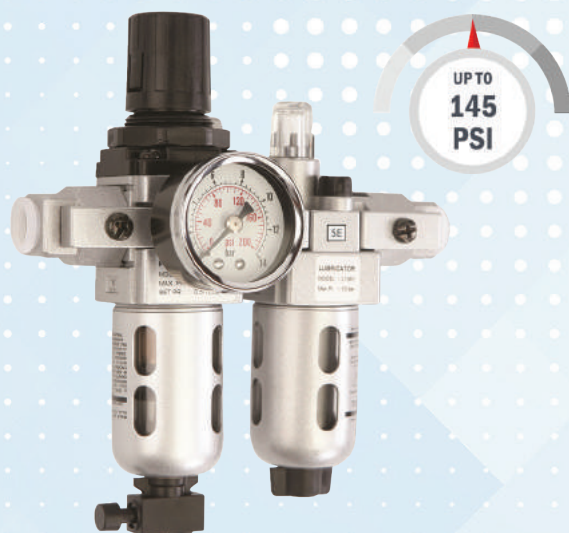

**400820**

## AIR FILTER REGULATOR AND LUBRICATOR - 1/2”

### TECHNICAL DATA

SKU	400820
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	99 CFM
INLET	NPT(f) 1/2”
OUTLET	NPT(f) 1/2”
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8”
BOWL CAPACITY - FILTER	1.5 oz
BOWL CAPACITY - LUBRICATOR	5.2 oz



**400720**

## AIR FILTER REGULATOR 1/2”

### TECHNICAL DATA

SKU	400720
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	106 CFM
INLET	NPT(f) 1/2”
OUTLET	NPT(f) 1/2”
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8”
BOWL CAPACITY - FILTER	1.5 oz

## AIR FILTER REGULATOR AND LUBRICATOR - 1/2"

### TECHNICAL DATA

SKU	400801
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	89 CFM
INLET	NPT(f) 1/2"
OUTLET	NPT(f) 1/2"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	1.5 oz
BOWL CAPACITY - LUBRICATOR	5 oz



**400801**

## AIR FILTER REGULATOR 1/2"

### TECHNICAL DATA

SKU	400701
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	89 CFM
INLET	NPT(f) 1/2"
OUTLET	NPT(f) 1/2"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	1.5 oz



**400701**

## AIR REGULATOR 1/2"

### TECHNICAL DATA

SKU	400601
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	89 CFM
INLET	NPT(f) 1/2"
OUTLET	NPT(f) 1/2"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"



**400601**

DESICCANT BREATHERS

AIR REGULATOR & LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS


ACCESSORIES

The Filter-Regular Combination & Lubricator are attached in series using spacers & piping adapters, which makes the 2 components easily removable/mountable without disturbing the pipeline. Come complete with a wall mounting bracket.

**Air Filter:** is used to separate dust, dirt, moisture & other contaminants from compressed air. The filter has a Die Cast Aluminum body & bowl with a high-performance Sintered Bronze Filtering element. The filter is designed with a separator & shield for efficient moisture separation.

**Regulator:** maintains a steady outlet pressure, unaffected by variations/fluctuations in the inlet pressure. Regulators have a Non-Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet.

**Air Lubricators:** is used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/Micro Mist type, up to 50' pipe runs. Designed for best performance with 32-grade oil. These have a Die Cast Aluminum head & bowl. The head is fitted with Oil Drop Indicator, Oil drop controller, & Oil Filling Plug.

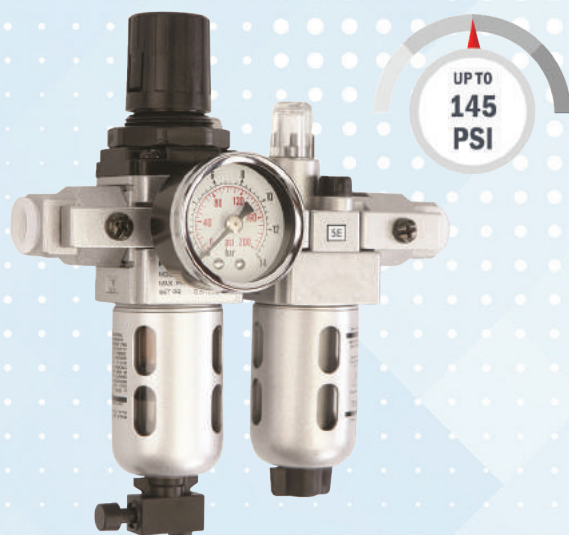

**450361**

## AIR FILTER REGULATOR AND LUBRICATOR - 3/8"

### TECHNICAL DATA

SKU	450361
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	63 CFM
INLET	NPT(f) 3/8"
OUTLET	NPT(f) 3/8"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	1.1 oz
BOWL CAPACITY - LUBRICATOR	1.9 oz



**450366**

## AIR FILTER REGULATOR 3/8"

### TECHNICAL DATA

SKU	450366
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	77 CFM
INLET	NPT(f) 3/8"
OUTLET	NPT(f) 3/8"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	1.1 oz

The Filter-Regular Combination & Lubricator are attached in series using spacers & piping adapters, which makes the 2 components easily removable/mountable without disturbing the pipeline. Come complete with a wall mounting bracket.

**Air Filter:** is used to separate dust, dirt, moisture & other contaminants from compressed air. The filter has a Die Cast Aluminum body & bowl with a high-performance Sintered Bronze Filtering element. The filter is designed with a separator & shield for efficient moisture separation.

**Regulator:** maintains a steady outlet pressure, unaffected by variations/fluctuations in the inlet pressure. Regulators have a Non-Raising “Press to Lock” adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet.

**Air Lubricators:** is used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/Micro Mist type, up to 50’ pipe runs. Designed for best performance with 32-grade oil. These have a Die Cast Aluminum head & bowl. The head is fitted with Oil Drop Indicator, Oil drop controller, & Oil Filling Plug.

## AIR FILTER REGULATOR AND LUBRICATOR - 1/4”

### TECHNICAL DATA

SKU	450365
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	18 CFM
INLET	NPT(f) 1/4”
OUTLET	NPT(f) 1/4”
WORKING PRESSURE	Up to 215 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8”
BOWL CAPACITY - FILTER	0.3 oz
BOWL CAPACITY - LUBRICATOR	6.7 oz



**450365**

## AIR FILTER REGULATOR 1/4”

### TECHNICAL DATA

SKU	450360
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	20 CFM
INLET	NPT(f) 1/4”
OUTLET	NPT(f) 1/4”
WORKING PRESSURE	Up to 215 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8”
BOWL CAPACITY - FILTER	0.3 oz




**450360**

The Filter-Regular Combination & Lubricator are attached in series using spacers & piping adapters, which makes the 2 components easily removable/mountable without disturbing the pipeline. Come complete with a wall mounting bracket.

**Air Filter:** is used to separate dust, dirt, moisture & other contaminants from compressed air. The filter has a Die Cast Aluminum body & bowl with a high-performance Sintered Bronze Filtering element. The filter is designed with a separator & shield for efficient moisture separation.

**Regulator:** maintains a steady outlet pressure, unaffected by variations/fluctuations in the inlet pressure. Regulators have a Non-Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet.

**Air Lubricators:** is used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/Micro Mist type, up to 50' pipe runs. Designed for best performance with 32-grade oil. These have a Die Cast Aluminum head & bowl. The head is fitted with Oil Drop Indicator, Oil drop controller, & Oil Filling Plug.

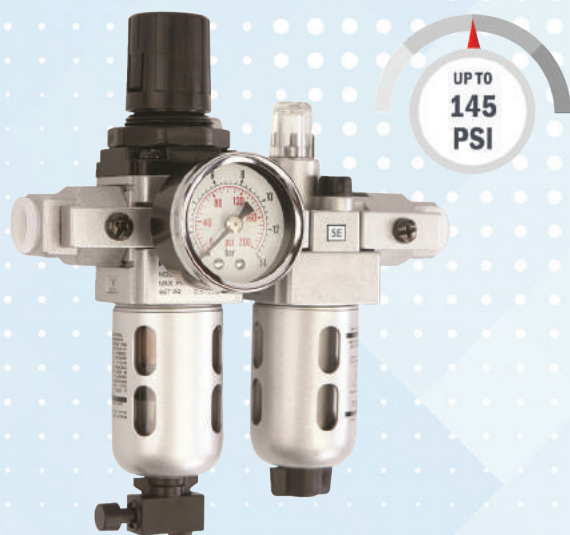

**450350**

## AIR FILTER REGULATOR AND LUBRICATOR - 1/4"

### TECHNICAL DATA

SKU	450350
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	18 CFM
INLET	NPT(f) 1/4"
OUTLET	NPT(f) 1/4"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	0.3 oz
BOWL CAPACITY - LUBRICATOR	0.7 oz



**450349**

## AIR FILTER REGULATOR 1/4"

### TECHNICAL DATA

SKU	450349
MATERIAL	Die Cast and Aluminum Body
MAX. FLOW RATE	20 CFM
INLET	NPT(f) 1/4"
OUTLET	NPT(f) 1/4"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	0.3 oz

## AIR FILTER REGULATOR AND LUBRICATOR - 1/4"

### TECHNICAL DATA

SKU	400501
MATERIAL	Aluminum and Plastic Body
MAX. FLOW RATE	16 CFM
INLET	NPT(f) 1/4"
OUTLET	NPT(f) 1/4"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	0.3 oz
BOWL CAPACITY - LUBRICATOR	0.7 oz



**400501**

## AIR FILTER REGULATOR 1/4"

### TECHNICAL DATA

SKU	400401
MATERIAL	Aluminum and Plastic Body
MAX. FLOW RATE	16 CFM
INLET	NPT(f) 1/4"
OUTLET	NPT(f) 1/4"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"
BOWL CAPACITY - FILTER	0.3 oz



**400401**

## AIR REGULATOR 1/4"

### TECHNICAL DATA

SKU	400301
MATERIAL	Aluminum and Plastic Body
MAX. FLOW RATE	16 CFM
INLET	NPT(f) 1/4"
OUTLET	NPT(f) 1/4"
WORKING PRESSURE	Up to 145 PSI
WORKING TEMPERATURE	32° F to 140° F
GAUGE THREAD	NPT(f) 1/8"



**400301**

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES

DESICCANT  
BREATHERS

AIR REGULATOR &  
LUBRICATORS

HOSE REELS



## SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.

## SELECTING HOSE REELS

The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.

## SIZES AND CAPACITY

<b>MODEL F400</b>	Up to 50ft 3/8" or Up to 30ft 1/2"
<b>MODEL F460</b>	Up to 60ft 3/8" or Up to 50ft 1/2"
<b>MODEL F550</b>	Up to 80ft 3/8" or Up to 60ft 1/2"
<b>MODEL F555</b>	Up to 100ft 3/8" or Up to 100ft 1/2"


HOSES

TIRE INFLATORS

FITTINGS


ACCESSORIES

## HOSE REEL INSTALLATIONS

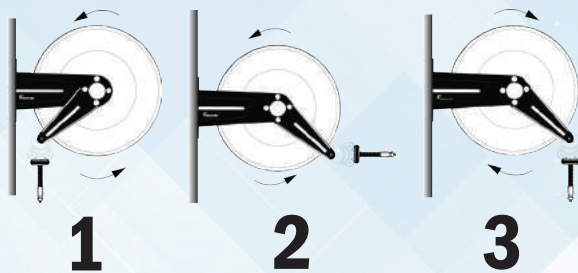

### WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 2 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.

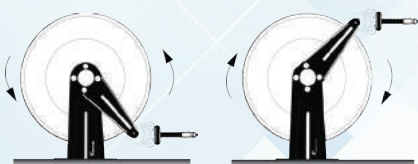

### BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.



### CEILING

Ceiling installations are the same as the wall mounted 2 set up.

## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- VITON SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **290 PSI**

Hose reels, with hose, are equipped with Continental reinforced smooth hose and brass fittings NPT(f) x NPT(m). Resuable fittings also available.



DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES


SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
-----	-------	-------	--------	-------------	--------	--------

### AIR AND WATER HOSE REELS

450338	F400	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	28 lbs
450351	F400	1/2" NPT(m)	3/8" NPT(m)	30 ft	3/8"	35 lbs
450352	F400	1/2" NPT(m)	3/8" NPT(m)	50 ft	3/8"	39 lbs
450353	F400	1/2" NPT(m)	1/2" NPT(m)	30 ft	1/2"	37 lbs
450339	F460	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	36 lbs
450354	F460	1/2" NPT(m)	1/2" NPT(m)	50 ft	1/2"	42 lbs

### AIR HOSE REELS

450368	F460	1/2" NPT(m)	3/8" NPT(m)	30 ft	3/8"	35 lbs
450364	F460	1/2" NPT(m)	3/8" NPT(m)	50 ft	3/8"	39 lbs
450370	F460	1/2" NPT(m)	1/2" NPT(m)	30 ft	1/2"	37 lbs
450371	F460	1/2" NPT(m)	1/2" NPT(m)	50 ft	1/2"	42 lbs

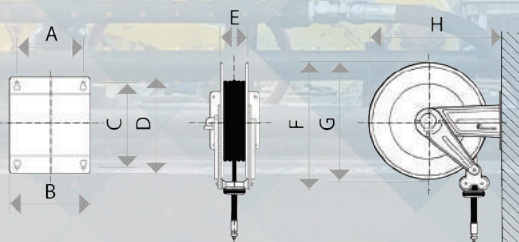

MODEL	A	B	C	D	E	F	G	H
F400	6.2"	4.7"	6.6"	7.6"	3.8"	17.7"	15.8"	17.1"
F460	6.2"	4.7"	6.6"	7.6"	3.8"	18.9"	18.1"	19.7"
F550	7.9"	5.9"	8.9"	10.7"	4.8"	23.3"	21.7"	23.7"
F555	9.9"	7.9"	8.9"	10.7"	6.7"	23.3"	21.7"	23.7"






## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- VITON SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **290 PSI**

Hose reels, with hose, are equipped with Continental reinforced smooth hose and brass fittings NPT(f) x NPT(m). Resuable fittings also available.



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
<b>AIR HOSE REELS</b>						
450373	F550	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	49 lbs
450369	F550	1/2" NPT(m)	3/8" NPT(m)	65 ft	3/8"	61 lbs
450375	F550	1/2" NPT(m)	3/8" NPT(m)	80 ft	3/8"	64 lbs
450372	F550	1/2" NPT(m)	1/2" NPT(m)	60 ft	1/2"	66 lbs
450374	F555	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	58 lbs
450376	F555	1/2" NPT(m)	3/8" NPT(m)	100 ft	3/8"	76 lbs
450377	F555	1/2" NPT(m)	1/2" NPT(m)	80 ft	1/2"	82 lbs
450378	F555	1/2" NPT(m)	1/2" NPT(m)	100 ft	1/2"	87 lbs

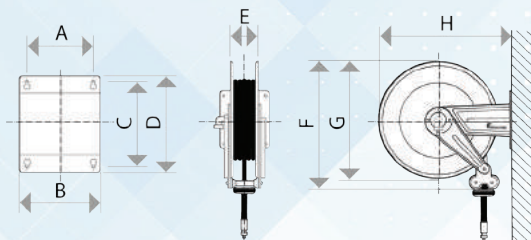


MODEL	A	B	C	D	E	F	G	H
F400	6.2"	4.7"	6.6"	7.6"	3.8"	17.7"	15.8"	17.1"
F460	6.2"	4.7"	6.6"	7.6"	3.8"	18.9"	18.1"	19.7"
F550	7.9"	5.9"	8.9"	10.7"	4.8"	23.3"	21.7"	23.7"
F555	9.9"	7.9"	8.9"	10.7"	6.7"	23.3"	21.7"	23.7"

## FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- VITON SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE : **290 PSI**

Hose reels, with hose, are equipped with Continental reinforced smooth hose and brass fittings NPT(f) x NPT(m). Resuable fittings also available.

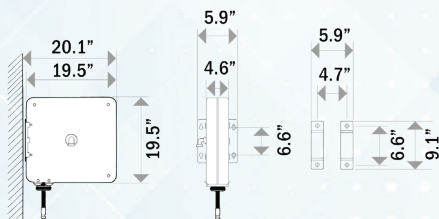

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES

SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
<b>AIR HOSE REELS</b>						
450110	CS500	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	28 lbs
450111	CS500	1/2" NPT(m)	3/8" NPT(m)	30 ft	3/8"	35 lbs
450112	CS500	1/2" NPT(m)	3/8" NPT(m)	50 ft	3/8"	39 lbs
450113	CS500	1/2" NPT(m)	1/2" NPT(m)	60 ft	1/2"	37 lbs



SKU	MODEL	INLET	OUTLET	MAX. WORKING PRESSURE	HOSE LENGTH	HOSE Ø	WEIGHT
<b>AIR AND WATER HOSE REELS</b>							
450103	CS275	1/4" NPT(f)	1/4" NPT(m)	145 PSI	37 ft	1/4"	8 lbs
450104	CS300	1/4" NPT(f)	1/4" NPT(m)	290 PSI	30 ft	1/4"	28 lbs

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES



## FEATURES:

- BRASS FITTINGS
- SPECIAL SIZE FITTINGS AVAILABLE
- MAX. WORKING PRESSURE : **200 PSI**

### Approximately Weight per Foot

1/4"	3/8"	1/2"
+ - 1.8 oz	+ - 2.8 oz	+ - 4.5 oz

## HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
450317	3/8"	200 PSI	600 PSI	30 ft	NPT(m) 3/8" x NPT(f) 3/8"
450318	3/8"	200 PSI	600 PSI	50 ft	NPT(m) 3/8" x NPT(f) 3/8"
450319	3/8"	200 PSI	600 PSI	65 ft	NPT(m) 3/8" x NPT(f) 3/8"
450346	3/8"	200 PSI	600 PSI	80 ft	NPT(m) 3/8" x NPT(f) 3/8"
450379	3/8"	200 PSI	600 PSI	100 ft	NPT(m) 3/8" x NPT(f) 3/8"
450320	1/2"	200 PSI	600 PSI	30 ft	NPT(m) 1/2" x NPT(f) 1/2"
450321	1/2"	200 PSI	600 PSI	50 ft	NPT(m) 1/2" x NPT(f) 1/2"
450322	1/2"	200 PSI	600 PSI	60 ft	NPT(m) 1/2" x NPT(f) 1/2"
450323	1/2"	200 PSI	600 PSI	65 ft	NPT(m) 1/2" x NPT(f) 1/2"
450324	1/2"	200 PSI	600 PSI	80 ft	NPT(m) 1/2" x NPT(f) 1/2"
450325	1/2"	200 PSI	600 PSI	100 ft	NPT(m) 1/2" x NPT(f) 1/2"

## FEATURES:

- BRASS FITTINGS
- SPECIAL SIZE FITTINGS AVAILABLE
- MAX. WORKING PRESSURE : **200 PSI**



### Approximately Weight per Foot

1/4"	3/8"	1/2"
+/- 1.8 oz	+/- 2.8 oz	+/- 4.5 oz



## CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
411403	1/4"	200 PSI	600 PSI	3 ft	NPT(m) 1/4" x NPT(m) 1/4"
411406	1/4"	200 PSI	600 PSI	6 ft	NPT(m) 1/4" x NPT(m) 1/4"
411410	1/4"	200 PSI	600 PSI	10 ft	NPT(m) 1/4" x NPT(m) 1/4"
411415	1/4"	200 PSI	600 PSI	15 ft	NPT(m) 1/4" x NPT(m) 1/4"
413803	3/8"	200 PSI	600 PSI	3 ft	NPT(m) 3/8" x NPT(m) 3/8"
413806	3/8"	200 PSI	600 PSI	6 ft	NPT(m) 3/8" x NPT(m) 3/8"
413810	3/8"	200 PSI	600 PSI	10 ft	NPT(m) 3/8" x NPT(m) 3/8"
413815	3/8"	200 PSI	600 PSI	15 ft	NPT(m) 3/8" x NPT(m) 3/8"
411203	1/2"	200 PSI	600 PSI	3 ft	NPT(m) 1/2" x NPT(m) 1/2"
411206	1/2"	200 PSI	600 PSI	6 ft	NPT(m) 1/2" x NPT(m) 1/2"
411210	1/2"	200 PSI	600 PSI	10 ft	NPT(m) 1/2" x NPT(m) 1/2"
411215	1/2"	200 PSI	600 PSI	15 ft	NPT(m) 1/2" x NPT(m) 1/2"

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES



**400101**



## STANDARD TIRE INFLATOR

### TECHNICAL DATA

SKU	400101
MATERIAL	Aluminum
WORKING PRESSURE	45 to 145 PSI
AIR INLET PRESSURE	150 to 175 PSI
VOLTAGE	110V
POWER WATT	10W
WORKING TEMPERATURE	10° F to 122° F
ACCURACY	+/- 1%
DISPLAY	Digital 1"
* Compatible with nitrogen	
** Integrated hose holder	

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



**400201**



## PREMIUM TIRE INFLATOR

### TECHNICAL DATA

SKU	400201
MATERIAL	Aluminum
WORKING PRESSURE	45 to 145 PSI
AIR INLET PRESSURE	150 to 175 PSI
VOLTAGE	110V
POWER WATT	10W
WORKING TEMPERATURE	10° F to 122° F
ACCURACY	+/- 1%
DISPLAY	Digital 1"
* Compatible with nitrogen	
** Integrated hose holder	
*** Alert when calibration is completed	
**** Convertible from PSI to BAR and BAR to PSI	

### Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

## 1/4" BRASS NIPPLE

### TECHNICAL DATA

SKU	411401
MATERIAL	Brass
THREAD	1/4" NPT(m)



**411401**

## 1/2" BRASS NIPPLE

### TECHNICAL DATA

SKU	411201
MATERIAL	Brass
THREAD	1/2" NPT(m)



**411201**

## SS SWIVEL FOR HOSE REELS - 3/8"

### TECHNICAL DATA

SKU	450333
MATERIAL	Stainless Steel
INLET	3/8" NPT(m)
OUTLET	3/8" NPT(F)



**450333**

## SS SWIVEL FOR HOSE REELS - 1/2"

### TECHNICAL DATA

SKU	450334
MATERIAL	Stainless Steel
INLET	1/2" NPT(m)
OUTLET	1/2" NPT(F)



**450334**

## SS SWIVEL FOR HOSE REELS - 3/4"

### TECHNICAL DATA

SKU	450335
MATERIAL	Stainless Steel
INLET	3/4" NPT(m)
OUTLET	3/4" NPT(F)



**450335**

## SS SWIVEL FOR HOSE REELS - 1"

### TECHNICAL DATA

SKU	450336
MATERIAL	Stainless Steel
INLET	1" NPT(m)
OUTLET	1" NPT(F)



**450336**

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES

DESICCANT  
BREATHER

AIR REGULATOR &  
LUBRICATORS

HOSE REELS

HOSES

TIRE INFLATORS

FITTINGS

ACCESSORIES



**450201**

## SWIVEL FOR HOSE REELS - 3/8"

### TECHNICAL DATA

SKU	450201
MATERIAL	Brass
INLET	3/8" NPT(m)
OUTLET	3/8" NPT(F)



**450202**

## SWIVEL FOR HOSE REELS - 1/2"

### TECHNICAL DATA

SKU	450202
MATERIAL	Brass
INLET	1/2" NPT(m)
OUTLET	1/2" NPT(F)



**450203**

## SWIVEL FOR HOSE REELS - 3/4"

### TECHNICAL DATA

SKU	450203
MATERIAL	Brass
INLET	3/4" NPT(m)
OUTLET	3/4" NPT(F)



**450204**

## SWIVEL FOR HOSE REELS - 1"

### TECHNICAL DATA

SKU	450204
MATERIAL	Brass
INLET	1" NPT(m)
OUTLET	1" NPT(F)



**400918**

## DIGITAL AIR PRESSURE GAUGE - 1/8"

### TECHNICAL DATA

SKU	400918
MATERIAL	Die cast Aluminium
MAX. PRESSURE	300 PSI
INLET	1/8" NPT(m)
MEASURING UNITS	PSI, BAR, MpA & Kg/Cm2
INLET	1/8" NPT(m)



# WATER





## CAR CLEANING EQUIPMENT AND ACCESSORIES

- PAGE 316 - PORTABLE WATER DISPENSER



- PAGE 317 - ABSORBER SYNTHETIC CHAMOIS CLOTH



- PAGE 318 - CLEANING AND DRYING CLOTH



- PAGE 319 - SCRATCH-FREE WASHING SPONGE AND MITT



- PAGE 320 - SQUEEGEES AND BRUSHES



# DISPENSER

Equipment is suitable for the nebulization of low-density lubricating oils, detergents, sterilizers, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar, they work automatically without any continuous link to compressed air. For the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with the brush with continuous lux, or the washing of the items plunged in the liquid directly in the tank. The lid can be removed and so it is possible to work better.



Wolflube NEW water, detergent, and disinfectant sprayer. When filled with 3/4 of its capacity with fluid and the rest with air with pressure within 87 and 116 PSI, the sprayer will have enough pressure to work without an air compressor need. Made in stainless steel, this heavy duty portable sprayer unit will give you more flexibility and mobility to your everyday tasks.

Warning: Do not use inflammable fluids.



## STAINLESS STEEL PORTABLE DISPENSE UNIT

### TECHNICAL DATA

SKU	700001
MATERIAL	Stainless Steel
CAPACITY	6.3 GAL
MAX. PRESSURE	174 PSI
PRESSURE VALVE	NPT(f) 1/2"
SEALS	Viton




**700001**

## ABSORBER SYNTHETIC CHAMOIS CLOTH

### TECHNICAL DATA

SKU	700101
MATERIAL	PVA Chamois
COLOR	Yellow
CASE WITH	12 units
DIMENSIONS	26" x 17"

- Resistant to mold, mildew and most chemicals
- PVA dries up to 10X more than regular cloth
- Scratch and lint free cleaning cloth
- Extremely absorbent
- Machine washable

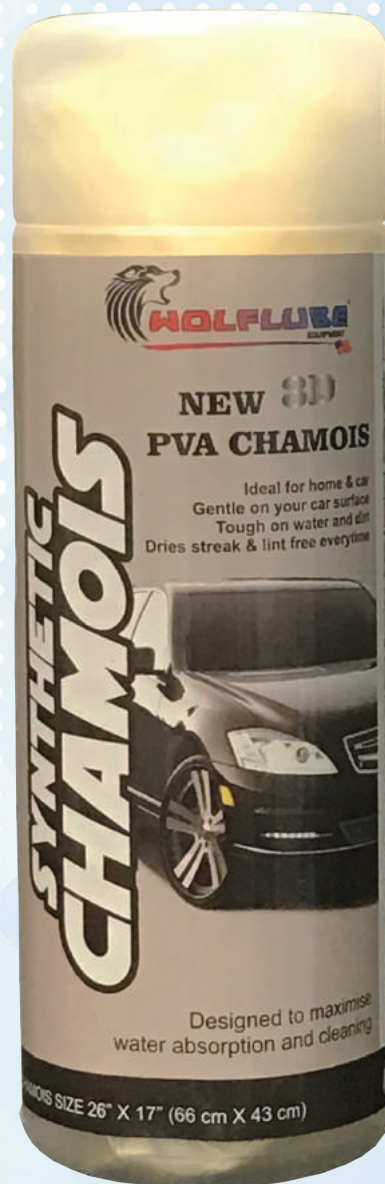

**700101**





**700102**



## MICROFIBER CLEANING CLOTH PACK WITH 2

### TECHNICAL DATA

SKU	700102
MATERIAL	80% Polyester, 20% Polyamide
GRAMMAGE	300 gsm
COLOR	Yellow
CASE WITH	20 units
DIMENSIONS	16" x 16"

- Scratch and lint free cleaning cloth
- Extremely absorbent
- Machine washable (gentle cycle and low heat)



**700103**



## MICROFIBER CLEANING CLOTH PACK WITH 3

### TECHNICAL DATA

SKU	700103
MATERIAL	80% Polyester, 20% Polyamide
GRAMMAGE	300 gsm
COLOR	Blue, Yellow and Pink
CASE WITH	10 units
DIMENSIONS	16" x 16"

- Scratch and lint free cleaning cloth
- Extremely absorbent
- Machine washable (gentle cycle and low heat)



**700104**



## PREMIUM SCRATCH-FREE DRYING/CLEANING CLOTH

### TECHNICAL DATA

SKU	700104
MATERIAL	100% Microfiber
GRAMMAGE	400 gsm
COLOR	Yellow / Grey
CASE WITH	10 units
DIMENSIONS	18" x 15"

- Premium scratch and lint free drying/cleaning cloth
- Removes cured wax, glaze and heavy duty
- Extremely absorbent
- Machine washable (gentle cycle and low heat)

## PREMIUM SCRATCH-FREE WASHING SPONGE

### TECHNICAL DATA

SKU	700201
MATERIAL	100% Microfiber
COLOR	Yellow
CASE WITH	10 units
DIMENSIONS	9" x 4.3" x 2.2"

- Premium scratch and lint free wash sponge
- Extremely absorbent
- Machine washable (gentle cycle and low heat)



**700201**

## PREMIUM SCRATCH-FREE WASHING MITT

### TECHNICAL DATA

SKU	700202
MATERIAL	100% Microfiber
COLOR	Yellow
CASE WITH	10 units
DIMENSIONS	9.8" x 7" x 2.3"

- Scratch and lint free cleaning cloth
- Extremely absorbent
- Machine washable (gentle cycle and low heat)



**700202**

## PREMIUM SCRATCH-FREE WASHING MITT

### TECHNICAL DATA

SKU	700203
MATERIAL	100% Microfiber
COLOR	Yellow
CASE WITH	10 units
DIMENSIONS	9.8" x 7" x 2.3"

- Premium scratch and lint free drying/cleaning cloth
- Removes cured wax, glaze and heavy duty
- Extremely absorbent
- Machine washable (gentle cycle and low heat)



**700203**



**700301**

## 2 IN 1 SQUEEGEE AND CLEANING 8" LONG

### TECHNICAL DATA

SKU	700301
MATERIAL	PP, TPR, Aluminum
LENGTH	8"
HEAD	8"
CASE WITH	5 units

- Wide soft rubber blade
- Nylon netted bug sponge
- Scratch and lint free
- Extremely absorbent sponge



**700302**

## 2 IN 1 SQUEEGEE AND CLEANING 20" LONG

### TECHNICAL DATA

SKU	700302
MATERIAL	PP, TPR, Aluminum
LENGTH	20"
HEAD	8"
CASE WITH	5 units

- Wide soft rubber blade
- Nylon netted bug sponge
- Scratch and lint free
- Extremely absorbent sponge



**700401**

## WHEEL BRUSH BRISTLE IN PVC - 10" LONG

### TECHNICAL DATA

SKU	700401
MATERIAL	PP, PU, TPR
LENGTH	10" x 2.7"
CASE WITH	6 units

- Two separate durable bristle loops for complete cleaning
- Comfort handle

## STANDARD WASHING BRUSH WITH PVC BRISTLE

### TECHNICAL DATA

SKU	700402
MATERIAL	PVC
LENGTH	38" to 66"
HEAD	11"
HANDLE / POLE	Aluminum - Telescopic
CASE WITH	3 units

- 66" telescopic handle/pole
- ON/OFF water control
- Heavy duty brush head

## WASHING BRUSH - BRUSH ONLY

### TECHNICAL DATA

SKU	700492
MATERIAL	PVC
HEAD	11"

## PREMIUM WASHING BRUSH WITH PVC BRISTLE

### TECHNICAL DATA

SKU	700403
MATERIAL	PBT
LENGTH	38" to 66"
HEAD	11"
HANDLE / POLE	Aluminum - Telescopic
CASE WITH	3 units

- Extra smooth (PBT)
- 66" telescopic handle/pole
- ON/OFF water control
- Heavy duty brush head

## WASHING BRUSH - BRUSH ONLY

### TECHNICAL DATA

SKU	700493
MATERIAL	PBT
HEAD	11"



**700402**



**700403**







**WOLFLUBE EQUIPMENT**

16300 SW 137th AVENUE, SUITE 103

MIAMI, FL - 33177 - USA

PHONE: +1 786-250-5268 | FAX: +1 888-705-1771

[CONTACT@WOLFLUBE.COM](mailto:CONTACT@WOLFLUBE.COM)

[WWW.WOLFLUBE.COM](http://WWW.WOLFLUBE.COM)

**CATALOG# 710**